

**RESOLUTION TO EFFECT REPAIRS TO SCOTT LEVEL ROAD
GORDON TOWN DIVISION**

WHEREAS the Scott Level Road is used as a major vehicular and pedestrian thoroughfare that services the Jacks Hill Community and environs

AND WHEREAS this road has deteriorated significantly over the years

AND WHEREAS this road, if not urgently repaired, could potentially dislocate and cut-off many communities


AND WHEREAS this road has been selected for upgrade and repair based on consultation with the citizens in the community and surrounding areas

BE IT RESOLVED that Kingston and St. Andrew Municipal Corporation (KSAMC) seek funding from the Equalization Fund in the sum of Twelve Million, Nine-Hundred and Ninety Dollars (\$12,990,000) to effect urgent repairs to this road

BE IT FURTHER RESOLVED that this resolution be sent to the Minister of Local Government & Community Development for approval and support

MOVED BY: CLLR. NEVILLE WHITTAKER, JP - Gordon Town Division

SECONDED BY: CLLR. ALVIN FRANCIS, JP - Mavis Bank Division

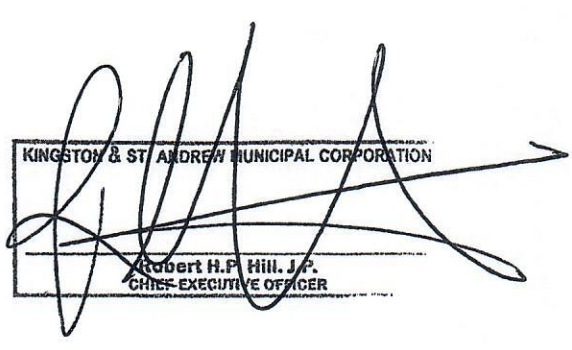
KINGSTON & ST. ANDREW MUNICIPAL CORPORATION
Robert H.P. Hill, J.P.
CHIEF EXECUTIVE OFFICER

10 (ii)

ksac roads

**KINGSTON & ST. ANDREW MUNICIPAL CORPORATION
CHIEF ENGINEER'S DEPARTMENT**

BILL OF QUANTITIES

DATE: JUNE 27, 2017


DIVISION: GORDON TOWN

LOCATION: SCOTTELEVEL ROAD

SUBJECT: ROAD REHABILITATION (700M X5M)

Item	Description	Qty	Unit	Rate	Total
A	Clean up and cart away silt, debris and other solid wastes from roadway and cart away spoils to an approved dump	1	sum	\$ 200,000.00	\$200,000.00
B	Provide tools, equipment and labour to scarify damaged surface and prepare formation as directed and cart away spoils to an approved dump	3400	m ²	\$ 300.00	\$1,020,000.00
C	150mm thick imported marl filling, spread, level and grade to fall and crossfall and well consolidated to receive asphaltic concrete	3400	m ²	\$ 800.00	\$2,720,000.00
D	Spread, roll and compact 38mm thick asphaltic concrete including prime coat applied to falls and crossfalls to the approval of the Engineer	3500	m ²	\$ 2,500.00	\$8,750,000.00
E	Construct kerb and channel	60	m	\$ 5,000.00	\$300,000.00
				TOTAL	\$12,990,000.00

Prepared by 

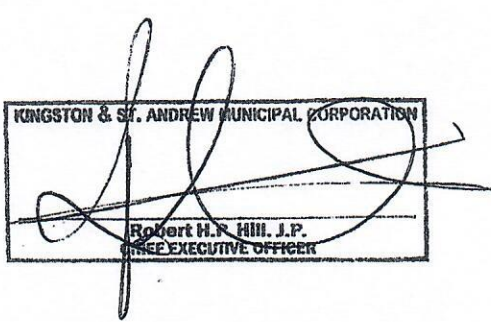

KINGSTON & ST. ANDREW MUNICIPAL CORPORATION

Robert H. P. Hill, J.P.
CHIEF EXECUTIVE OFFICER