



## 20' & 28' MOBILE SHOWER TRAILERS

Our 20' shower trailer features 6 private suites individually accessed on both sides of the trailer, each with a deadbolt locked changing area containing benches, mirrors and clothing wall hooks.

Our 28' shower trailer features 8 private suites each with a changing area, shower and private lock. Powered by tankless water heaters, the trailer has configuration flexibility for optimized male/female utilization to support varied field missions, and features a seamless non-wood wall, floor and ceiling construction that optimizes cleanliness while minimizing opportunities for mold and mildew.

***see back for specifications***




28' model shown

# SPECIFICATIONS

## 20' Shower Trailer

|                    |            |
|--------------------|------------|
| Number of stations | 6          |
| Weight             | 8,980 lbs  |
| Weight (max.)      | 15,300 lbs |
| Length   w/tongue  | 20'   24'  |
| Width              | 8'5"       |
| Height             | 12'        |
| Fresh tank         | 200 gal    |
| Waste tank         | 715 gal    |

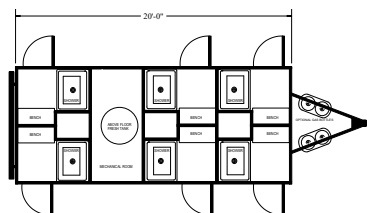

## Towing & Hook-up

Vehicle: 2-5/16" ball hitch; w/round 7 Pin/slot plug to tow vehicle for lights & electric wheel brakes

Electric: Standard 120V, single phase; can convert between 20 & 30 Amp; 20 Amp electrical shore line cord


Propane: (2) 30lb LP gas tanks on A-frame w/ standard OPD valve/connectors

Freshwater: Uses 3/4" standard city water hook-up to 200 gal tank

Grey Water: Uses 3" dump valve with ball shut-off from 715 gal tank

## 28' Shower Trailer - Model Shown

|                    |              |
|--------------------|--------------|
| Number of stations | 8            |
| Weight             | 11,450 lbs   |
| Weight (axle)      | (2)7,000 lbs |
| Length   w/tongue  | 28'   33'    |
| Width (floor plan) | 8'           |
| Width (road)       | 8'5"         |
| Width (steps out)  | 10'6"        |
| Height w/AC        | 11'6"        |
| Fresh tank         | 200 gal      |
| Waste tank         | 1,150 gal    |

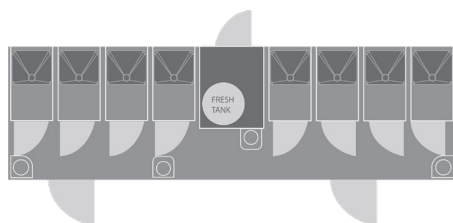

## Towing & Hook-up

Vehicle: 2-5/16" ball hitch; w/round 7-pin/slot plug to tow vehicle

Electric: 120V, single phase; (4) cords each cord on unit will not draw more than 20 Amps. (3 for summer operation; 4 for winter operation) individual 20 Amp circuits

Propane: (4) 40 lb LP tanks (liquid propane) on hitch for water heating w/standard OPD valve/connector

Freshwater: Uses 3/4" standard city water hook-up inlet to 200 gal tank, staged to on board pump for pressure

Grey Water: - 3" pipe thread, to 2" Quick Connect Cam lock connection (convertible to 3") from 1150 gal tank

