




TIMOTHY STONE


## MESH BAND ADJUSTMENT

TO ADJUST THE BAND

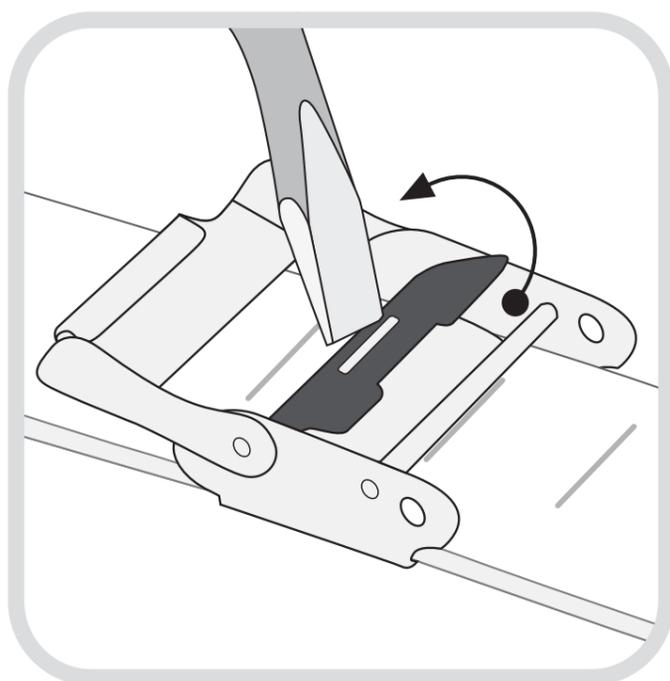


### LIFT

Position a flathead screwdriver or other adjustment tool in the slot on the clasp. Lift the bar in the direction facing away from the straight pin.

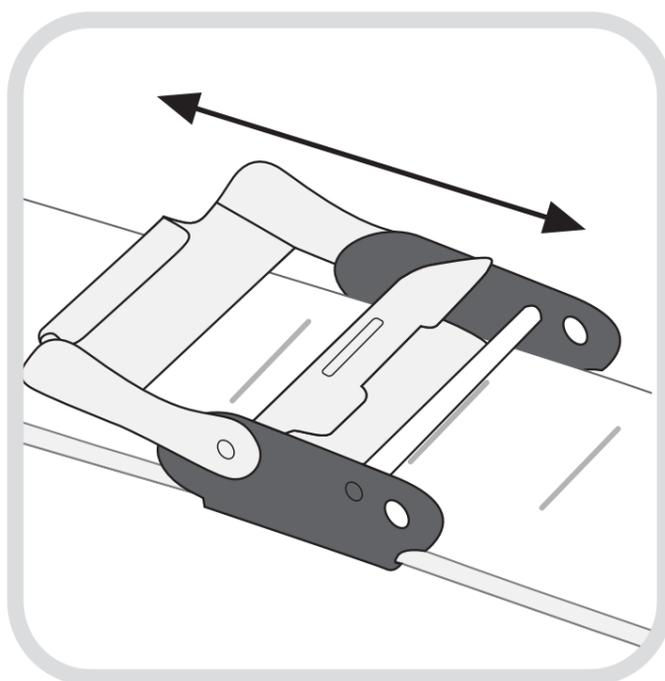

### SHIFT

Shift the adjustable buckle to the desired position. Clasp must be placed in one of the adjustment indentations on the back of the band.

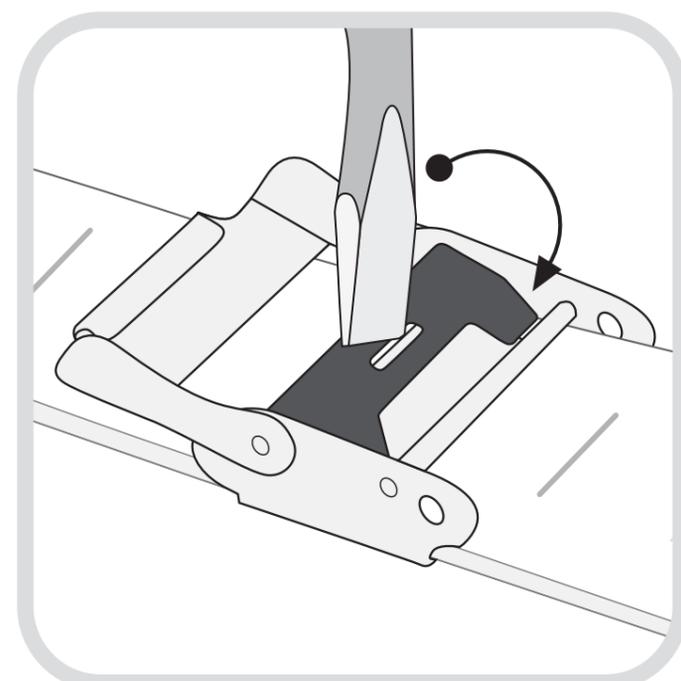

### PRESS

Press the slotted clasp closed.

**IMPORTANT:** Ensure that the tool handle points toward the watch case. Pressing the adjustment tool against the straight pin may bend and destroy the pin.