

Gold Coast Barges Vessel Information



Give us a call and we'll barge in!

Vessel Name: Modular Work Platforms (MWP)

Dimensions:

Length: 3m

Width: 2 m

Depth: 0.4m

Each platform can hold approx 1.5t (Stability increases with total size of pontoon)

Manufactured of High Density Polyethylene - very robust and non-slip surface.

Can be attached in many different shapes to suit your job requirements

Will need form ply or timbers put down under any heavy equipment to spread the load - or to protect from hot work.

Can have a set of aluminium spuds (poles) to hold in position on the seabed (up to 4m deep)

Suitable for:

MWP is perfect as a platform for workers and light equipment for Bridge maintenance, Gabion construction

With a Push boat and skip -


- can operate as a light duty barge in difficult to access waterways for
- mooring placement and inspections
- rock armouring
- Jetty removal
- Can negotiate most locks.
- Easily pushed into place with Elvis, or by hand if we assemble them close to your work site - depending on crane-age access.
- Can be tied directly to the work site using removable cleats



Spuds (poles and brackets) can be supplied to hold it in place on the seafloor and a workboat can be supplied to push into position and to move workers and equipment back and forth. Perfect platform for bridge maintenance work.



Work Platform and 'Porta Loo' in Nerang River for Gabion Baskets

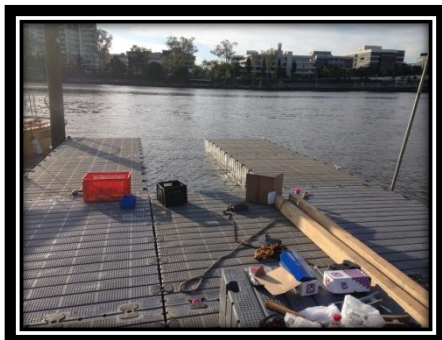

- With dogbone joiners shape of platform can be modified to suit purpose.
- Railings can be supplied
- Heavy Duty Timber whalers available to enable securing scaffolds etc



On hire for a major construction project in Brisbane.