



### Control Panel

The gen-set control panel was designed to include, in one single panel, the switches, control devices and the protection devices  
The components are the following :

- Engine cut-off module for automatic stop of engine in case of high water temperature, low oil pressure, high alternator temperature.
- Hour-meter.
- Start-stop button.
- Breaker for protection against of overload or short circuit.
- Thermal switch for D.C. electric circuit.

### Engine

- Easy access in case of maintenance to the feeding system and lubrication, of the sea/water pump and the air filter.
- Safety stop in case of low oil pressure.
- Safety stop in case high water/exhaust gas temperature.
- Oil and fuel filters of easy access.
- Manual pump for oil drain.

### Alternator

- Synchronous, 4 poles, brush less self-excited, electronic voltage regulator (AVR).
- Rotor and stator coated with epoxy resin against external agents.
- Rotor dynamically balanced.
- Insulation class H.

### Soundproof cabin

A new project engineering design with a structure of a draw piece of aluminum supporting, painted aluminum panels type 5754 of high resistance to external agents.

Good accessibility inside canopy, makes maintenance services more easy.

Engine	50 Hz	60 Hz
Model	John Deere 4045 DFM 70	
Type	Diesel 4 stroke	
Cylinders (nr.)	4	
Cylinder block material	Cast iron	
Bore (mm - in.)	106 - 4,2	
Stroke (mm - in.)	127 - 5,0	
Displacement (cc - cu.in.)	4500 - 274,6	
Power (hp)	54	60
Rated rpm	1500	1800
Combustion system	Direct	
Engine head material	Cast iron	
Speed governor	Centrifugal mechanical	
Lubrication system	Forced	
Oil sump capacity (L - qt.)	13,3 - 14,1	
Engine stop system	Stop solenoid	
Fuel pump	Mechanical	
Fuel pump discharge (cm - in.)	70 - 27,6	
Full load consumption (L/h -	11,4 - 3,01	12 - 3,17
Starting battery (Ah-V)	100 - 12	
Battery charger (A-V)	40 - 12	
Starter (kW-V)	2,3 - 12	
Max. inclination	30°	
Water pump flow (L/min - gal/min)	118 - 31,2	142 - 37,4

Alternator	50 Hz	60 Hz
Type	Synchronous, 4-poles, self-excited	
Cooling	Air	
Voltage (V)	230 - 400	440 - 480
Frequency (Hz)	50	60
Current (A)	110 - 64	70 - 64
Max. power (kVA)	44	53
Continuous power (kVA)	40	50
Power factor (cos $\phi$ )	0,8	
Insulating class	H	
Voltage stability	$\pm 2\%$	
Frequency stability	$\pm 5\%$	


### Cooling system

The cooling of the engine is based on a closed inner flow of coolant. The system is based on a cupronickel heat exchanger seawater/coolant type, where the thermal exchange occurs between coolant and seawater. Two separate pumps contribute to the flow of the coolant and the sea water.

# MARINER 44T 50 Hz 53T 60 Hz



	50 Hz	60 Hz	
Dimensions (Leng. x Width x Height)	1820 x 800 x 1075 mm		(with canopy)
	71,7 x 31,5 x 42,3 in.		
Weight	925 kg , 2035 lb		(with canopy)
Noise power level	59 dBA @ 7mt	59 dBA @ 7mt	

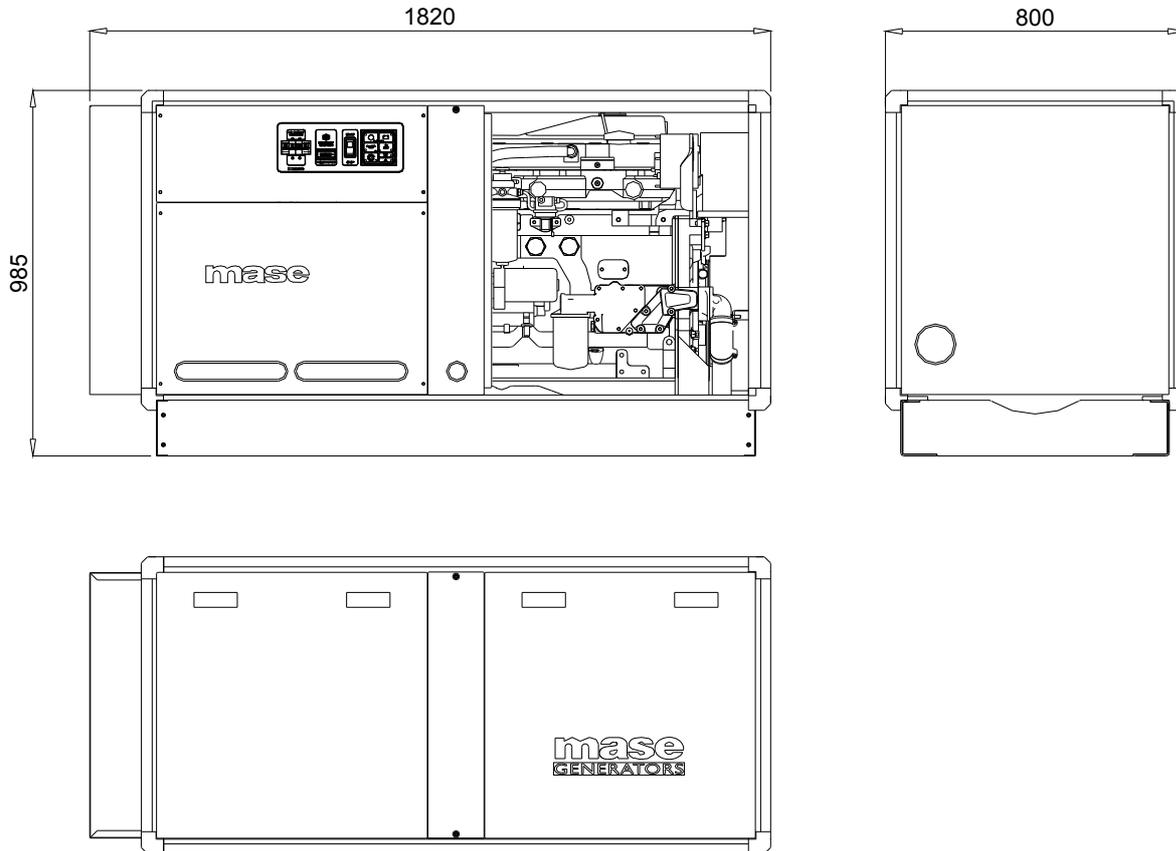

## FITTINGS

EXHAUST COMPONENTS KIT

SIPHON BREAK

STARTING REMOTE CONTROL PANEL WITH INSTRUMENTS

*This drawing is only a reference and is not indicated for the installation. For more information, you may contact your local dealer or **mase generators S.p.A.***

***mase generators S.p.A.** reserves the right to change the design or specifications without notice and without any obligations or liability whatsoever. For more information, you may contact your local **mase** dealer.*

Dealer:



MASE GENERATORS S.p.A. Via Tortona, 345  
47522 Cesena (FC) Italy  
Tel. +39-0547-354311 Fax. +39-0547-317555  
Email : mase@masegenerators.com