

PROBRITE™**LED
ARCHITECTURAL
WALLPACK****SPEC SHEET**

Catalog No. : PHX12-PC-3K-BZ

Type : Wallpack

Project Name :

Location :

Qty :

Date :



PROBRITE'S Architecturally-designed, highly-efficient, and maintenance-free LED entry and patio wall pack light provides an evenly distributed, inviting, and secure 3000K warm white light free of unsightly glare or 'hot-spots'. This Dual-Control Enabled light allows the user to choose between two operating modes: a Dusk to Dawn (automatic nighttime ON and daytime OFF) mode or a manual Switch-Controlled operation.

APPLICATIONS

This slim-profile wall mounted light combines pleasing ambience and high-output security lighting ideal for both residential and light commercial applications such as entry-ways, patios, apartment complexes, storage areas, warehouses, loading areas, hotels and restaurants.

PRODUCT PERFORMANCE AT A GLANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LP/W	CRI	REPLACES (MH)
12W	11W	900 lm	75 lm/w	≥80	75W

HOUSING

Impact and fade resistant, UV-stabilized polycarbonate housing mounted with stainless steel hardware.

OPTICS

Frosted glare-free polycarbonate lens provides wide and even light coverage without visible "hot-spots" on the lens for an inviting feel.

FINISH

Fade, weather, and abrasion resistant, bronze polycarbonate finish.

IP RATING & LISTINGS

LED light engine is weather proof rated IP65.

cULus, FCC Certified

MOUNTING

Detachable mounting plate that fits most standard round and octagon junction boxes.

Includes an integral hooking wire on the back of the fixture that attaches to the mounting plate enabling easy hands-free wiring and installation.

WARRANTY

Fixture is covered by a 5-year limited warranty.


See probrite.com/warranty for details.

LED ARCHITECTURAL WALLPACK

PHX12-PC-3K-BZ




PRODUCT LINE DRAWING

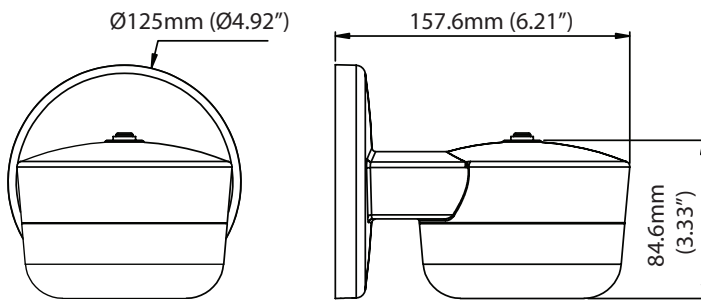


SUGGESTED MOUNTING HEIGHT:
5-10FT.(1.5-3M)

PRODUCT SPECIFICATIONS

LUMENS (LIGHT OUTPUT)	900
WATTAGE	12W
MOUNTING	Wall Mount
FREQUENCY	50-60 HZ
THD	<20%
PF	>0.9
AMBIENT OPERATING RANGE	-20-40 C
INPUT VOLTAGE	120V
EFFICACY	>75LM/W
LED CHIP	Philips® LED
PHOTOCELL	Yes
DRIVER	YG® driver technology
DRIVER EFFICIENCY	>85%
STANDARD LIFETIME	>50,000 hours
STANDARD WARRANTY	5 Years
WATER PROOFING GRADE	IP65
WEIGHT	1.76 lbs
CCT	3000K

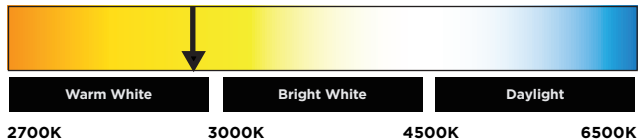

2D PHOTOMETRIC VIEW

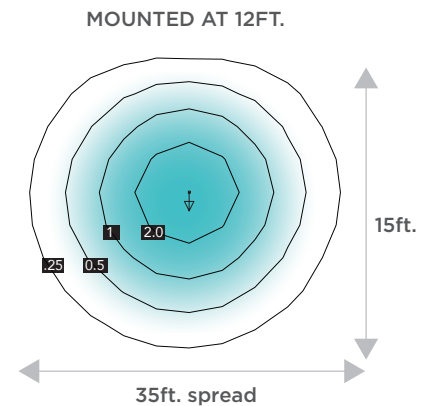

APPLICATION

