

Product Data Sheet

PUSH² 150 Glove Box Push Through HEPA Filter

APPLICATIONS

Designed to ensure the safe operation of chemical, pharmaceutical, nuclear & biological isolators, Push² Cylindrical glove box filter has been designed using the very latest materials to provide lower resistance, longer life and stability even at isolator breach pressures.

CONSTRUCTION

The Push² 150 contains no metal parts and is therefore totally incinerable for ease of disposal. This feature, combined with the continuous safety edges of the moulding also means the product is safe and simple to use. The modern ergonomic design makes handling simple, even when being manipulated with the thickest isolator gloves. Westbury's integrated moulded continuous gasket ensures a perfect air seal every time. The product's increased media surface area ensures the lowest possible pressure whilst operating at full capacity. This in turn results in lower energy demand in operation. The standard operational flow rate of 40m³/hr (23.5 CFM) runs at only 110Pa (0.44" WG) and has been tested to 120m³/hr (70.6 CFM) – simulating a typical isolator glove breach. Every Westbury Push² filter is individually tested and the product supplied with its own individual test certificate, serial number and production date for full traceability.




- H14 to EN1822
- No metal parts
- Fits all standard 150mm (6") bore canisters
- Modern ergonomic design
- Low resistance
- Individually tested & certified
- Full traceability

TECHNICAL INFORMATION

Dimensions:	148mm (5.8") Diameter x 162mm (6.4") Long		
Efficiency:	H14 to EN1822 - Individually tested.		
Rated Capacity:	40m ³ /hr (23.5 CFM)	Initial Pressure loss:	110Pa (0.44" WG)
Integrity retained at:	120m ³ /hr (70.6 CFM)	Burst Pressure exceeds:	1000Pa

COMPONENTS OF CONSTRUCTION

Filter Media:	Glass Fibre Paper H14 Filter Media	Separators:	Synthetic Polymer Hot Melt
Pleat Pack Joint Adhesive:	PVA Adhesive	Plastic Mesh:	Extruded Polypropylene
Frame:	ABS Plastic	Seal:	TPE Plastic
Potting Adhesives:	Polyol/Polyisocyanate mixture	Label:	Polyester

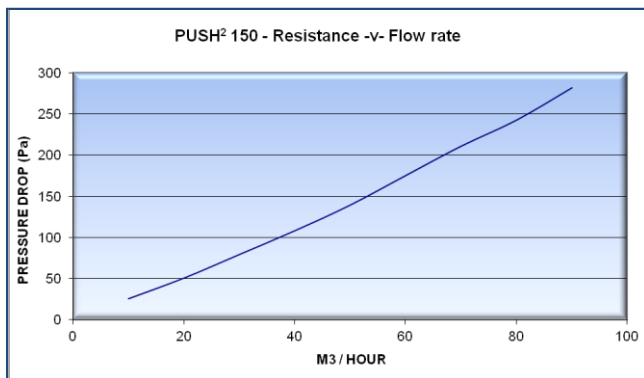

INSTALLATION INSTRUCTIONS

It is recommended that a fine smear of food grade silicone grease is applied to the gasket prior to insertion of the filter

Please note: In their continuous search for product improvement Westbury reserve the right to change materials and specifications without prior notice.

Head Office & Works:-
Westbury Filtration Ltd
Unit 1 Sandringham Court
Network 65 Business Park
Burnley BB11 5TD

Southern Sales & Warehouse:-
Westbury Filtration Ltd
Unit 3 - 20 Balcombe Road
Horley
Surrey RH6 9HR

T: 01282 459744 F: 01282 459521

T: 01306 611611 F: 01306 611613

E: sales@westbury.group W: www.westbury.group

WDATA-P150H-001

Ref: DST-T-V1

WESTBURY
Established 1969