


M Series

Specifications


Dimensions

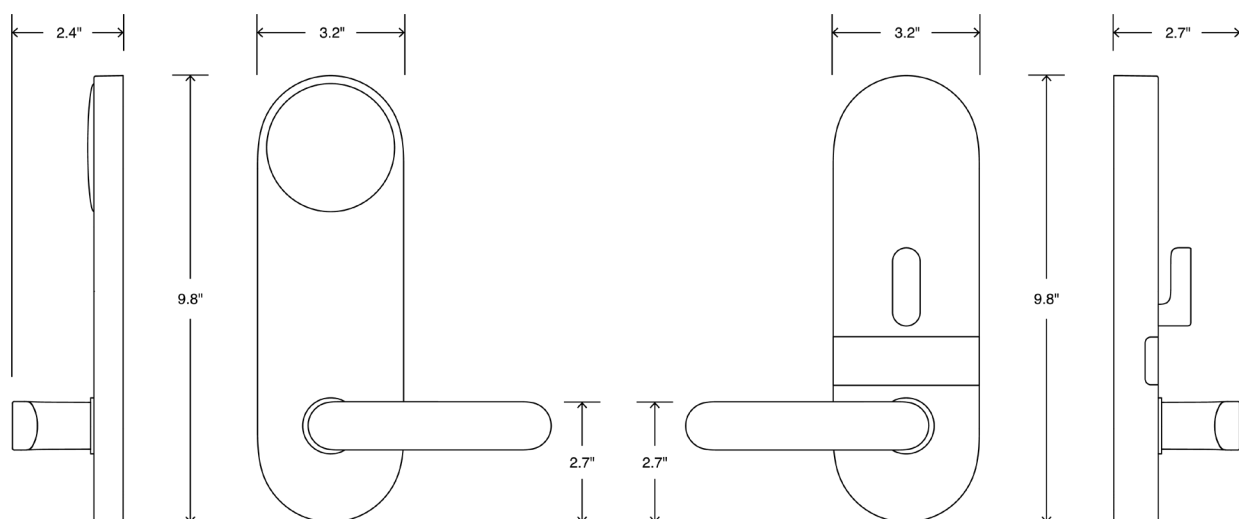

Finishes



Lever Styles

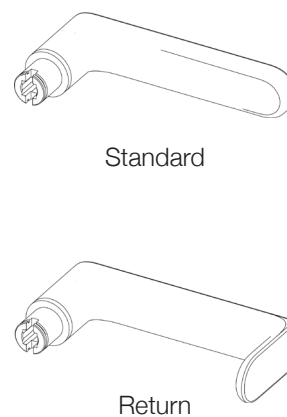

Features

Credential Types	Smartphone, NFC Card, Doorcode, Mechanical Key
Users	200
Camera	135° image capture
Management	App and Cloud

Communication

Wireless Standards	Bluetooth Low Energy (BLE), Near Field Communication (NFC)
NFC Frequency	13.56 MHz
NFC Read Range	1.18
NFC Type	MiFare Classic
Supported Smartphones	iOS and Android (see website for full list)
Interface	Mobile apps, touchpad, NFC, and web

Power

Power Supply	6 AA non-rechargeable alkaline batteries Wired power
Battery Life	12 months with normal usage
Battery Status	Monitoring and notifications in Latch software suite
Power Type	Class 2 isolated, UL listed DC power supply
Supply Voltage	12VDC
Power	2.4W

Environmental

Operating Temperature	Exterior: -30°C to 70°C, Interior: -20°C to 54°C, Camera: 0°C to 60°C
Operating Humidity	0–95% relative humidity, non-condensing

Certifications, Compliance, and Warranty

Certifications	UL 10C (90 min), FCC Part 15, IC RSS, built to ANSI/BHMA 156.13 Series 1000 Grade 1
Compliance	Complies with American Disabilities Act
Warranty	1-year limited warranty on electronic components, 5-year limited warranty on mechanical components

Mechanical Specifications

Chassis	Mortise deadbolt
Handing	Field reversible
Door Thickness Compatibility	1-3/4"
Backset Compatibility	2-3/4"

Mechanical Specifications

Lever Style Options	Standard and Return
Latchbolt Throw	3/4"
Deadbolt Throw	1"
Strike Plate	1-1/4" x 4-7/8", 1-1/4" lip
Cylinder	Schlage Type C keyway standard, with custom and specific cylinders available on request