


NEP Sweden HD 11



HD11 is a medium sized, open unit equipped for entertainment and sports events, with a built in storage area.

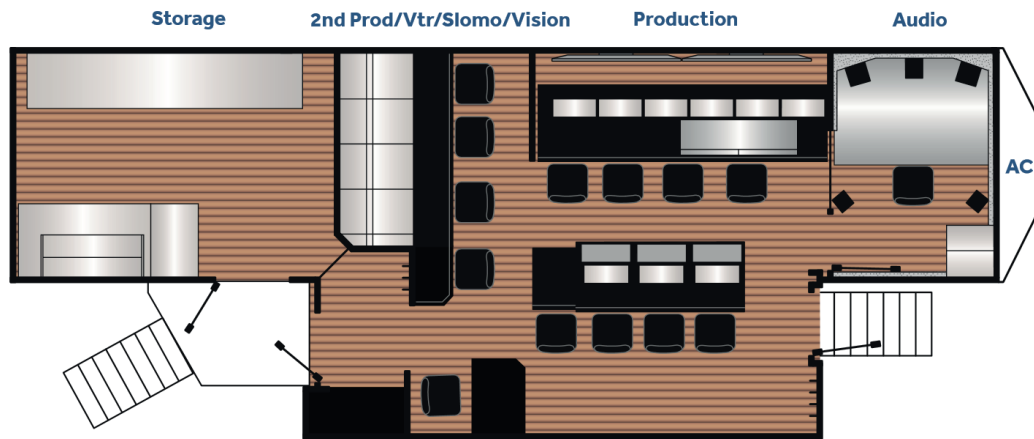

Trailer:

Length: 11.5m (15.6 incl. tractor)
Width: 4.3 m
Height: 4.0 m
Power requirements: 1 x 63 A 3-phase 400 VAC

Cameras / Lenses:

Grass Valley LDX-86N | Fiber
Grass Valley LDX86N XtremeSpeed, 3x and 6x speed
Canon 11x - 122x lenses

Production Room (5.1 audio monitoring)

Vision Mixer

Sony MVS 6530 Mixer
3 M/E, 48 i/p, 32 o/p
2D DME, frame/clip memory, internal multiviewers

Sony ICP-6530 Mixer Panel
3 M/E, 24 XPT buttons, 16 keys
2,5D resizers on 8 keys, macros, snapshots

VTR / EVS / Hard Drives / Archiving:

Cabled for 2 EVS XT ChannelMAX
Cabled for 4 VTR
Sony HDCAM SR/HDCAM/Digibeta/XDCAM
USB-recorder

EVS HD XT2/XT3/XT Via, XFile, IP Director, XT Access and XStore available on request

Graphics System:

VizEngine or on request from NEP Sweden Graphics

Video:

Video Router

Imagine Platinum MX HD Video Router
120 x 128 3G/HD/SD
2x HXPro64 Integrated multiviewers

Misc Video

Lawo V_pro8
Embedders, deembedders and cross-conversion
Imagine Sync pattern generator

Broadcast Control System:

Lawo Virtual Studio Manager (VSM)
UMD:s and GPI/Tally controlled by VSM
Hard- and software redundancy

Audio:

Audio Mixer

Lawo mc2 56-console with 32 faders
Full Genelec 5.1 audio monitoring

Audio Router

Lawo CompactCore with 5120 x 5120 routing capacity
144 DSP channels
96 mic/line i/p
64 analog line i/p / 96 AES i/o / >640 MADI-ports
40 SDI audio embedders/-deembedders
2 digital audio stageboxes with 32 ch mic/line i/p
Waves Audio Plugin server (integrated with Lawo mc2)
TC Electronic TC 6000, 4000, 3000, D-Two
Audio follow video possible by using VSM

Intercom

Riedel Artist 64
12 internal / 4 external intercom panels / 8 external intercom panels via Mediornet
4 ch duplex radiobases, integrated with the intercom system
Intercom integrated with audio router