


CROSS FIRE FLOOR PLANS





2-HORSE






3-HORSE

















4-HORSE







11/17 R-1

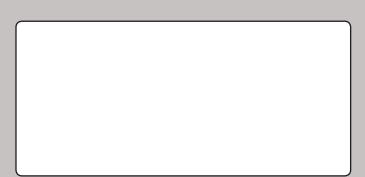



www.LoganCoach.com

LOGAN COACH, INC.

2990 South 800 West Nibley, UT 84321 (435) 752-3737



CROSS FIRE STANDARD FEATURES

DIMENSIONS

- 7'0" Tall 6'9" Wide
- 2-Horse BP 2,540 lbs Tongue Weight 378 lbs
- 3-Horse BP 2,920 lbs Tongue Weight 438 lbs
- 3-Horse GN 3,960 lbs Tongue Weight 920 lbs
- 4-Horse GN 4,720 lbs Tongue Weight 1,090 lbs

STRUCTURAL

- Galvanized Structural Tubing Frame Rails, Floor and Wall Uprights
- Aluminum Structural Roof Bows
- Aluminum Structural Roof Cove

EXTERIOR

- Smooth Aluminum Sheets
- Vortex Rubber Coating on Bumper Pull Tongue
- Treadbrite Gravel Guard around Front Wrap
- Rear Rubber Bumper
- Exterior Tie Ring One Each Side Per Stall

ELECTRICAL

- Dome Light in Tack Room
- L.E.D. Marker and Tail Lights
- L.E.D. Stall Lights

WARRANTY

- 8-Year Structural
- 2-Year Hitch to Bumper

TACK / DRESSING ROOM

- 33" Wide Tack Door Opening
- Carpet on Floor
- Blanket Bar
- (12) Bridle Hooks
- Carpet on Top Half of Bulkhead Wall Behind Bridles
- Swing Out Saddle Rack

STALL AREA

- Tailside Air Gap W/ Removable Plexiglass
- Drop Down Windows and Grills on Headside
- Douglas Fir Wood Floor W/ Vortex Rubber Coating
- 1/2" Rubber Floor Mats
- 48" High Double Wall Construction with Vortex Rubber Coating
- Padded Divider
- Pop-Up Vent Each Stall
- Double Rear Stall Entry Doors

WHEELS AND AXLES

- Torsion Axles
- Self-Adjusting Brakes
- Steel Wheels with Center Caps

AXLES AND TIRES

TRAILER	EMPTY WEIGHT	TONGUE WEIGHT	TORSION AXLES	TIRES	TIRE CAPACITY
2H BP	2,650 lbs.	470 lbs.	3,500 lbs.	ST225/75/R15	D Rated - 2,600 lbs.
3H BP	2,900 lbs.	530 lbs.	6,000 lbs.	ST235/80/R16	E Rated - 3,400 lbs.
3H GN	4,420 lbs.	1,100 lbs.	6,000 lbs.	ST235/80/R16	E Rated - 3,400 lbs.
4H GN	4,700 lbs.	1,350 lbs.	6,000 lbs.	ST235/80/R16	E Rated - 3,400 lbs.













