


RoHS 
Compliant



- Power Rating: 30W / 50W / 60W models
- Input Voltage: 120-277Vac
- Constant Current Design
- Output Current (400mA-1500mA)
- Efficiency to 85%
- 0-10V/PWM Dimming
- Dimming Range 5-100%
- Flicker Free
- OVP, SCP
- Metal case with built-in J-Box
- UL Class P, Class II Protection, SELV Output
- 5 year warranty
- Surge Protection level L-N: 1kv; L/N-GND: 2kv

▪ Mechanical Diagram

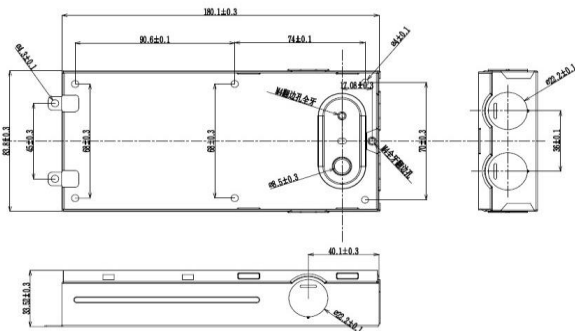

Application Options:

- Multiple power ratings available (30W/50W/60W)
- Dimming Options

Contact your Autec Technical Sales Rep today and discover if our LED Driver “The Philosopher” is the perfect solution to your unique lighting application!

▪ Model List (** 30W model shown; more available on website)

Custom Designs Available!

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L7WCD030S040SS-PM05	120~277Vac	30W	27-42V	400mA	400mA	85%	UL
L7WCD030S050SS-PM05	120~277Vac	30W	27-42V	500mA	500mA	85%	UL
L7WCD030S060SS-PM05	120~277Vac	30W	27-42V	600mA	600mA	85%	UL
L7WCD030S070SS-PM05	120~277Vac	30W	27-42V	700mA	700mA	85%	UL

Applications:

- Recommended for indoor use
- Greenhouse & horticultural
- Industrial grade
- Customizable to your own specs!

Contact our technical engineers to request your samples today!