


■ Features

- Single output to 15W
- Input voltage range: 90-264V
- Output current(650mA-1200mA)
- Efficiency to 83%
- Protections: OVP, SCP, OTP and OCP
- Single phase input
- LED indicator for DC power on
- LED indicator for DC low
- 3-year warranty



*Product images are for illustrative purposes only and may vary from actual design.

■ Mechanical Diagram

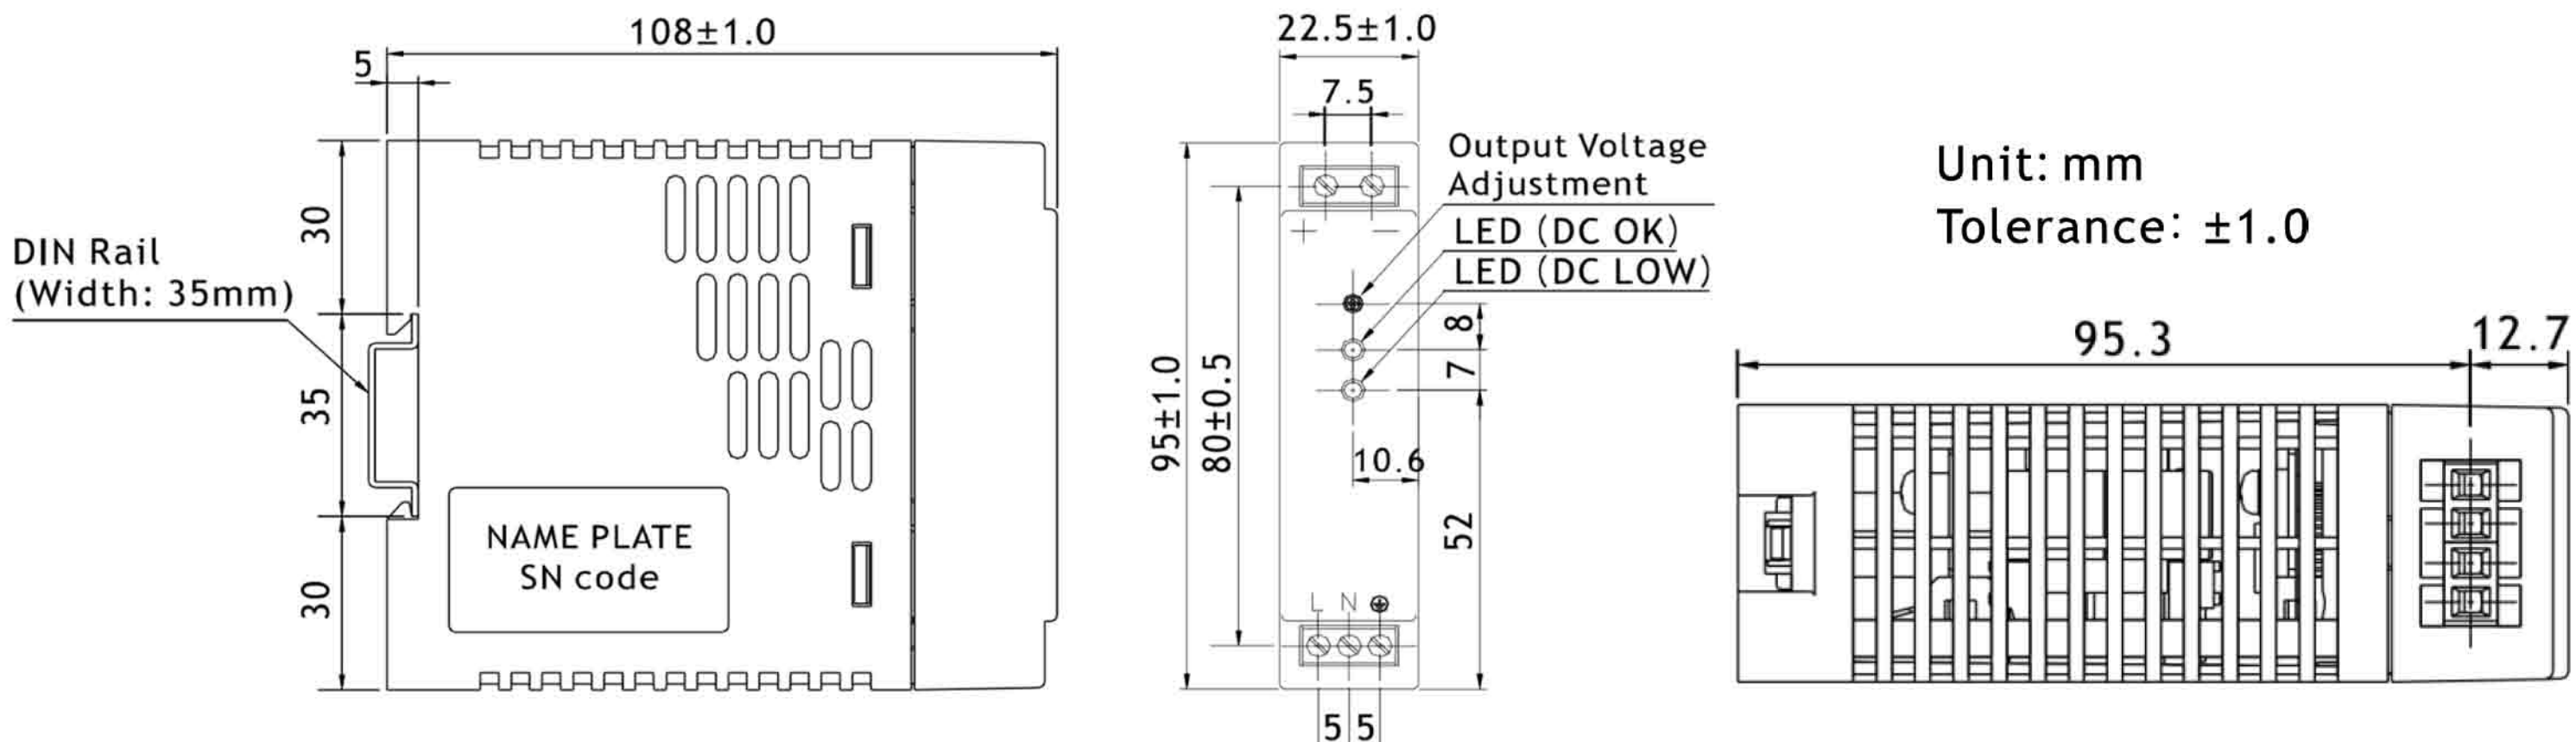

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Ripple	Certificates
DR-15-12	90-264Vac	15W	12V	0	1.2A	80%	12mV	UL/cUL/FCC/CE/CB
DR-15-24	90-264Vac	15W	24V	0	0.65A	83%	15mV	UL/cUL/FCC/CE/CB

Note:

1. The ripple values are measured at 20MHz of bandwidth by using 12" twisted pair-wire terminated with 0.1uF & parallel capacitor under ambient temperature 25°C at rated input voltage and rated load.
2. The efficiency values are measured under ambient temperature 25°C at rated input voltage and rated load.

■ Applications

- Process control
- Factory automation
- Traffic & Transportation system
- Other industrial applications

Custom designs available based on your own specs and requirements!
Contact our technical engineers to request your samples today!