

HOSES, DUCTING, SHEET RUBBER & GASKETS

CONTENTS	PAGE
----------	------

PVC Hose	1-4
Rubber Hose	5-9
Insertion, Sheet Rubber & Gaskets	9
Rubber Intake Components	10-11
Purosil Hose	12-15
Ducting	16

HOSES, DUCTING, SHEET RUBBER & GASKETS

PVC HOSE

Mako Clear Spring

Recommended Usages:

Suction and delivery of foodstuffs, drinking water, alcohol to 28%.
Conforms to CE 1935/2004 & AS/NZS 2070.

Hose Body: Translucent food grade PVC

Reinforcement: Steel wire helix

Temperature Range: -5° C to 65° C



Product Code	I.D. mm	O.D. mm	W.P. Bar	Kg/mt	Vaccum mm H6	Coil/mt	List Price per mtr
HEL006	06	12	7	0.10	625	30	14.05
HEL010	10	16	7	0.16	625	30	14.35
HEL012	12	18	5.5	0.18	625	30	14.60
HEL016	16	22	5.5	0.24	625	30	17.55
HEL019	20	27	4.85	0.35	625	30	21.65
HEL025	25	33	4.85	0.51	625	30	29.50
HEL032	32	41	4	0.73	625	30	38.05
HEL038	38	47	4	1.30	625	30	46.85
HEL050	50	60.8	4	1.70	588	30	72.70
HEL065	65	75	4		515	30	POA
HEL080	76	89	4		515	30	POA

Mako Blue Suction Hose

Recommended Usages:

Suction and Discharge of Petroleum based products.

Hose Body: Blue PVC

Reinforcement: White Rigid PVC

Temperature Range: -5° C to 60° C



Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Vac.m. H ² O	Coil/mt	List Price per mtr
BSH025	25	32	10	.40	7	50	21.45
BSH032	32	39	9	.55	7	50	27.90
BSH038	38	45	8	.75	7	50	33.40
BSH050	50	59	7	1.20	7	50	46.30
BSH063	64	73	6	1.75	7	30	67.60
BSH080	76	87	6	1.95	7	30	70.55
BSH100	100	116	5	3.40	6	30	127.45

Mako Black Marine Bilge Hose

Recommended Usages:

Extremely flexible, smooth bore hose for pumping out bilges. Very tight bending radius without kinking.

Cover: Black PVC

Reinforcement: Nylon helix

Tube: Black PVC

Temperature Range: -5° C to 60° C



Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price per mtr
MFH020	19	25		0.28	30	7.35
MFH025	25	31		0.35	10/30	10.10
MFH028	28.5	35		0.40	10/30	11.20
MFH032	32	38		0.44	30	13.30
MFH038	38	45		0.48	30	17.50
MFH050	50	60		0.48	40	25.00

HOSES, DUCTING, SHEET RUBBER & GASKETS

PVC HOSE

Mako Odourless White Sanitary Suction Hose



Recommended Usages:

Plumbing of marine toilets. PVC helix smooth bore. Remains flexible at low temperatures.

Body: White PVC/Rubber

Reinforcement: White rigid PVC helix

Temperature Range: -5° C to +60° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Length mtr	List Price per mtr
WSH020	19	24	4		20	16.40
WSH025	25	32	4		20	21.50
WSH038	38	45	3.5		20	30.00

PVC HOSE

Mako HD Washdown

Recommended Usages:

Washing down of food production areas, milking sheds, and other commercial areas that require a strong robust water hose.

Cover: White PVC – ribbed

Reinforcement: Polyester yarn

Tube: Black PVC

Temperature Range: -5° C to 65° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price per mtr
WDH012	12	17	14		20/100	9.95
WDH020	19	27	14	0.35	20/100	13.95
WDH025	25	33	14	0.54	20/100	17.15
WDH032	32	42	14	0.80	20/100	29.30
WDH040	38	50	14	0.95	20/100	44.65



HOSES, DUCTING, SHEET RUBBER & GASKETS

Mako T.P.R. Food Grade AS2554 & 2070

Recommended Usages:

Delivery of air, water, food and beverages; also petroleum based products

Cover: Translucent PVC with blue tint

Reinforcement: Polyester yarn with red tracer to denote petroleum capability.

Tube: Clear PVC

Temperature Range: -5° C to 60° C



Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price per mtr
CPH006	06	12	18	0.07	20/100/300	4.60
CPH008	08	14	18	0.09	20/100/300	5.15
CPH010	10	17	18	0.13	20/100/300	5.60
CPH012	12	20	18	0.17	20/100/300	7.05
CPH016	16	24	16	0.24	20/100	10.35
CPH019	19	28	14	0.33	20/100	12.60
CPH025	25	35	14	0.43	20/100	20.35
CPH032	32	42	12	0.82	20/60	27.05
CPH038	38	50	12	1.24	20/40	44.65
CPH050	50	64	9	1.64	20/40	63.50

Mako Drinking Water Hose AS2070 (non toxic food grade)

Product Code	I.D.	O.D.	W.P.Bar	Coil/mt	List Price per mtr	List Price Coil
DWH012	12	18	10	20-100	5.15	
DWH012/10	12	18	10	10 Mtr Fitted		57.25
DWH012/10SP	12	18	10	10 Mtr Fitted Spiral Hose		138.75
DWH012/20	12	18	10	20 Mtr		103.25

Recommended Usages:


Delivery of drinking water for caravans and the boating industry.

Cover: Clear PVC

Reinforcement: Polyester cord

Tube: Polyolefin

Temperature Range: -5° C to 60° C

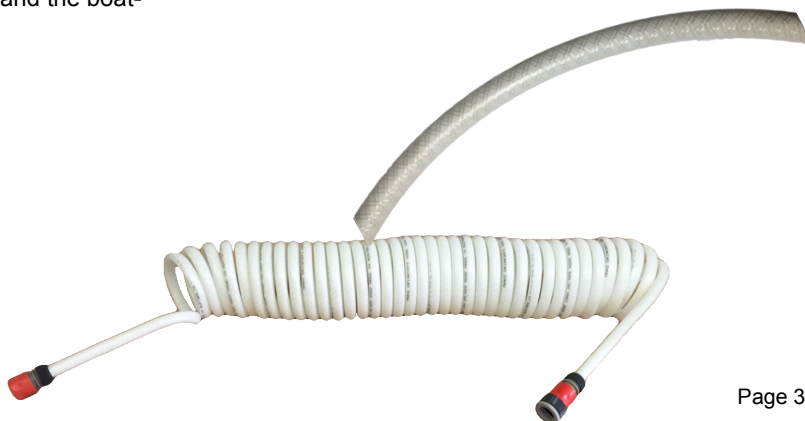

HOSES, DUCTING, SHEET RUBBER & GASKETS

PVC HOSE

Mako Clear Vinyl Tubing AS2070 (non toxic food grade)

Recommended Usages:

Non toxic clear tube, for use in low pressure transfer of water and beverage products. Food contact to AS2070

Tube: Clear PVC tube

Temperature Range: -10° C to 60° C



Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price Per Coil
CVT003	03	05	8	0.015	30	43.35
CVT005	05	08	7	0.033	30	43.35
CVT006	06	09	6	0.037	30	50.55
CVT008	08	11	5	0.054	30	60.70
CVT010	10	13	4	0.067	30	65.90
CVT012	12	15	4	0.091	30	94.35
CVT016	16	19	4	0.126	30	131.70
CVT019	19	23	3	0.167	30	175.55
CVT025	25	31	3	0.270	30	283.10
CVT032	32	38	2	0.400	30	438.75
CVT040	40	48	2	0.660	15	329.20
CVT050	50	60	2	0.980	15	460.75

Mako Safety Yellow

Recommended Usages:

Pressurised conveying of air or water. Resistant to oils. UV stabilised. Good abrasion resistance.

Cover: Safety Yellow PVC – ribbed

Reinforcement: Polyester Cords

Tube: Black PVC

Temperature Range: -5° C to 65° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price per mtr
YSH006	06	12	18	0.08	20/100/300	4.85
YSH008	08	14	18	0.13	20/100/300	5.55
YSH010	10	17	18	0.16	20/100/300	5.75
YSH012	12	20	18	0.21	20/100/300	7.90
YSH020	19	28	14	0.33	20/100	13.70
YSH025	25	35	14	0.50	20/100	16.45
YSH032	32	42	14	0.87	20/60	28.65
YSH038	38	52	14	1.33	20/40	41.20
YSH050	50	63	14	1.77	20/40	61.45



Mako Grey Marine Fuel Line

Recommended Usages:

Suitable for leaded, unleaded, alcohol based fuel and diesel fuels. UV stabilised, recommended for marine outboard applications.

ABOVE FLOOR APPLICATIONS

Cover: Grey PVC/Rubber Blend

Tube: Grey PVC/ Rubber Blend

Temperature Range: -10° C to 60° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	Kg/mt	Coil/mt	List Price per Coil
GMF008C	8	13	4	0.03	33	289.90
GMF010C	10	15	4	0.13	33	523.50



HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER HOSE

Mako Marine Fuel Filler Hose USCG/SAE J1527 Type A2 Flame Retardant

Recommended Usages:

Type A2 fuel fill hose is constructed with high grade chemigum tube for superior fuel resistance for type A2 fuel fill applications. This is the connection from the boats fuel fill port down to the boats fuel tanks. USCG/SAE J1527 Type A2 unleaded resistant.

Cover: Flame retardant

Reinforcement: Two ply synthetic braid with wire helix.

Tube: Black nitrile

Temperature Range: -30° C to 90° C

Mako Marine Fuel Line USCG/SAE J1527 Type A1 Flame Retardant

Recommended Usages:

For fuel feed and vent applications on marine pleasure craft. This hose meets or exceeds U.S. Coast Guard requirements for type A1 service as outlined in SAE J1527 .

Cover: Flame retardant synthetic rubber

Reinforcement: Synthetic braid

Tube: Black nitrile

Temperature Range: -30° C to 95° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	Length mtr	List Price per mtr
MFF020	19	29.4	6.9	20 & 60	83.95
MFF025	25	38.1	6.9	20 & 60	96.30
MFF032	32	47.3	6.9	20 & 60	107.70
MFF038	38	47.1	6.9	15, 20 & 60	110.90
MFF050	51	61.5	3.5	15, 20 & 60	122.75



Product Code	I.D. mm	O.D. mm	W.P.Bar	Length mtr	List Price per mtr
MRF006	06	16.5	13.5	30/100	20.40
MRF008	08	18	13.5	30/100	22.40
MRF010	10	19.8	13.5	30/100	24.00
MRF012	12	22.8	13.0	30/100	28.85
MRF016	16	25.8	13.0	30/100	34.65
MRF019	19	28	13.0	30/100	46.65



HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER HOSE

Mako Marine Fuel Line J1527 Type B1

Flame Retardant

Cover: Fire resistant

Reinforcement: Synthetic braid

Tube: Black nitrile to USCG standard.

Temperature: -20° C to 70° C

Recommended For: This hose provides flexible connections between rigid fuel distribution lines and engine where the hose is in an open environment on pleasure craft. This is suitable for marine diesel and gasoline blends of ethanol, methanol and ethers up to 15%. Not suitable for below floor applications.

NOT SUITABLE FOR CONFINED SPACES

Product Code	I.D. mm	O.D. mm	W.P.Bar	B.P. Bar	Length mtr	List Price per mtr
BMF008	7.9	14.3	3.5	14	30, 200 Mtr Spool	11.85
BMF010	9.5	15.8	3.5	14	30, 200 Mtr Spool	12.95
BMF012	12.7	20.5	3.5	14	30, 152 Mtr Spool	17.45



Mako Red Multipurpose

Recommended Usages:

This high quality multipurpose hose is suitable for conveying air, water, oil, all ALCOHOL BLENDED FUEL AND ALL PETROLEUM BASED PRODUCTS.

Cover: Red non-conductive ozone, UV, weather, oil resistant and less filler. 2 year no fade guarantee.

Reinforcement: Braided synthetic cord

Tube: BLACK SMOOTH 50% AROMATIC NITRILE TUBE

Temperature Range: -25° C to 95° C

Product Code	I.D. mm	O.D. mm	W.P.Bar	B.P. Bar	Coil/mtr	List Price
RMP005	4.8	12	20	80	20 & 200	13.30
RMP006	6.4	13	20	80	20 & 200	13.90
RMP008	7.9	15	20	80	20 & 200	14.30
RMP010	9.5	17	20	80	20 & 200	15.20
RMP012	12.7	21	20	80	20 & 152	19.00
RMP016	15.8	26	20	80	20 & 152	23.20
RMP020	19.1	29	20	80	20 & 152	28.60
RMP025	25.4	36	20	80	20 & 152	45.75
RMP032	31.8	44	20	60	20 & 60	78.00
RMP038	38.1	54	20	60	20 & 60	93.05
RMP050	50.8	67	20	60	20 & 60	117.60



HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER HOSE

MAKO Marine Exhaust Hose



SPECIALLY DESIGNED FOR THE MARINE INDUSTRY

For conveying wet exhaust fumes. Lloyds approved. Light weight corrugated construction gives excellent flexibility. Lloyds No. 08/1006 (E2)

Cover: Corrugated cover. Black with blue stripe. Synthetic (corrugated finish). Ozone and oil resistant and flame resistant.

Reinforcement: High tensile textile cords with embedded steel helix wires.

Tube: NBR blend handles 40% aromatics

Temperature Range: -20° C to 121° C

Working Pressure: 5 Bar 3:1 safety factor

CHECK SIZE AVAILABILITY

***NOTE: FIRST COLUMN SHOWS SUPERCLAMPS TO SUIT HOSE. REFER TO PAGE 7, CAMLOCKS/CLAMPS SECTION FOR 304 S/S SUPER CLAMP PRICING**

Clamps to suit	Product Code	I.D. mm	Bend Radius mm	Kg/mt	Length mtr	List Price per mtr
MIS029	MWE019	19	115	0.418	20 & 60	121.95
MIS031	MWE022	22	133	0.46	20 & 60	127.40
MIS035	MWE025	25	152	0.525	20 & 60	129.00
MIS039	MWE028	28	172	0.576	20 & 60	135.35
MIS041	MWE032	32	191	0.646	20 & 60	143.35
MIS043	MWE035	35	209	0.685	20 & 60	147.55
MIS047	MWE038	38	229	0.737	20 & 60	153.35
MIS051	MWE042	42	248	0.806	20 & 60	162.75
MIS053	MWE045	45	261	0.855	20 & 60	163.75
MIS057	MWE048	48	286	1.005	20 & 60	173.85
MIS059	MWE050	51	406	1.062	20 & 60	180.70
MIS067	MWE057	57	458	1.197	20 & 60	195.35
MIS070	MWE060	60	482	1.233	20 & 60	199.60
MIS073	MWE063	63	508	1.299		209.30
MIS079	MWE070	70	559	1.423	20 & 60	221.80
MIS082	MWE073	73	590	1.48	20 & 60	239.65
MIS085	MWE076	76	610	1.457	20 & 60	243.40
MIS097	MWE090	90	711	1.71	20 & 60	262.25
MIS112	MWE102	102	813	2.054	20 & 60	289.40
MIS125	MWE114	114	914	2.325	20	313.50
MIS139	MWE125	125	1016	2.575	20	357.30
MIS161	MWE150	152	1219	3.18	20	418.50
MIS213	MWE203	203	1626	5.496	12	679.05
MIS265	MWE250	250	2032	7.666	12	1 399.30
MIS322	MWE300	300		11.365	12	1 687.05

Page 7

HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER HOSE MAKO

MAKO Extreme Radiator Hose
Straight Length (914mm)



MAKO EXTREME RADIATOR 150PSI 100°C

Recommended Applications:

Automotive applications to convey hot water coolant.

Petrol & Oil resistant to 40% aromatic content.

Cover:
NBR
Blend
Rubber

Tube: NBR Blend Rubber

Reinforcement: Synthetic Braid

Temperature Range: -20° C to 100° C

Product Code	I.D. mm	O.D. mm	W.P. BAR	B.P. BAR	Length mm	List Price
RAD019	19	28	10	30	914	39.55
RAD022	22	31	10	30	914	46.30
RAD025	25	34	10	30	914	46.85
RAD028	28	38	10	30	914	52.90
RAD032	32	41	10	30	914	58.00
RAD035	35	45	10	30	914	62.15
RAD038	38	48	10	30	914	66.40
RAD042	42	52	10	30	914	70.15
RAD045	45	55	10	30	914	73.90
RAD048	48	59	10	30	914	77.70
RAD050	50	62	10	30	914	78.85
RAD054	54	66	10	30	914	93.20
RAD057	57	69	10	30	914	100.30
RAD060	60	72	10	30	914	103.65
RAD063	63	76	10	30	914	109.35
RAD067	67	78	10	30	914	113.05
RAD070	70	82	10	30	914	132.45
RAD073	73	86	10	30	914	138.50
RAD076	76	89	10	30	914	144.95
RAD080	80	94	10	30	914	165.15
RAD090	90	103	10	30	914	172.10
RAD102	102	116	10	30	914	194.80



HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER HOSE MAKO

Marine Sanitation Hose

Recommended Usages:

Odourless rubber marine sanitation hose.

Cover: White smooth SBR rubber compound, weather resistant

Tube: White smooth SBR rubber compound with releasing agent

Reinforcement: High strength synthetic cord plus helix wire

Tube: NBR

Temperature Range: -30° C to 70° C

Odourless
10 Year Warranty

BETTER
PRICING



Product Code	IDmm	ODmm	W.P. Bar	Kg/mtr	Coil/mtr	List Price per mtr
RSH019	19	27	3	0.428	20/60	49.85
RSH025	25	33	3	0.537	20/60	55.05
RSH038	38	46.5	3	0.872	20/60	76.10
RSH050	51	62	3	1.074	20/60	122.10

INSERTION, SHEET RUBBER & GASKETS

Nitrile Sheet – Unreinforced

10 Metre Rolls x 1220mm Wide

Product Code	Description	List Price per mtr
NIS015	1.5mm	106.30
NIS030	3.0mm	198.30
NIS045	4.5mm	257.10
NIS060	6.0mm	344.95

HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER INTAKE COMPONENTS

Hump Hose



Product Code	Size (I.D.)	List Price
AHH063	63mm	77.65
AHH076	76mm	77.65
AHH089	89mm	84.95
AHH102	102mm	90.10
AHH114	114mm	99.45
AHH127	127mm	99.45
AHH140	140mm	123.60
AHH152	152mm	126.05
AHH178	178mm	154.45
AHH203	203mm	375.45
AHH254	254mm	514.90

Hump Hose Reducer



Product Code	Size (I.D.-I.D.)	List Price
BHHR076063	76mm-63mm	144.10
BHHR089076	89mm-76mm	144.10
BHHR102076	102mm-76mm	144.10
BHHR102089	102mm-89mm	144.10
BHHR114102	114mm-102mm	144.10
BHHR127102	127mm-102mm	144.10
BHHR140102	140mm-102mm	144.10
BHHR140127	140mm-127mm	144.10
BHHR152102	152mm-102mm	144.10
BHHR152127	152mm-127mm	144.10
BHHR152140	152mm-140mm	144.10
BHHR178127	178mm-127mm	240.05
BHHR178140	178mm-140mm	240.05
BHHR178152	178mm-152mm	240.05
BHHR203152	203mm-152mm	365.15
BHHR203178	203mm-178mm	365.15
BHHR250203	254mm-203mm	507.65

Rubber Bends 90°



Product Code	Size (I.D.)	List Price
CRL05190	51mm	64.35
CRL05790	57mm	79.75
CRL06390	63mm	79.75
CRL07690	76mm	79.75
CRL08990	89mm	87.50
CRL10290	102mm	108.65
CRL11490	114mm	144.10
CRL12790	127mm	144.10
CRL14090	140mm	165.15
CRL15290	152mm	165.15
CRL17890	178mm	283.10
CRL20390	203mm	668.90
CRL25490	254mm	1 396.90

Rubber Bends 45°



Product Code	Size (I.D.)	List Price
DRL05145	51mm	97.75
DRL05745	57mm	118.40
DRL06345	63mm	121.00
DRL07645	76mm	121.00
DRL08945	89mm	128.65
DRL10245	102mm	128.65
DRL11445	114mm	144.10
DRL12745	127mm	144.10
DRL14045	140mm	149.25
DRL15245	152mm	156.75
DRL17845	178mm	221.35
DRL20345	203mm	437.40
DRL25445	254mm	844.90

HOSES, DUCTING, SHEET RUBBER & GASKETS

RUBBER INTAKE COMPONENTS

Reducing Rubber Bends 90°



Product Code	Size (I.D.-I.D.)	List Price
ERL07606390	76mm-63mm	120.95
ERL10207690	102mm-76mm	166.70
ERL10208990	102mm-89mm	166.70
ERL12710290	127mm-102mm	166.70
ERL15212790	152mm-127mm	166.70
ERL15214090	152mm-140mm	166.70
ERL17812790	178mm-127mm	180.15
ERL17814090	178mm-140mm	180.15
ERL17815290	178mm-152mm	333.95

Rubber Inserts



Product Code	Size (O.D.-I.D.)	List Price
RI0511038	51mm-38mm	39.35
RI051044	51mm-44mm	43.30
RI063051	63mm-51mm	43.30
RI063057	63mm-57mm	43.30
RI076051	76mm-51mm	46.95
RI076057	76mm-57mm	46.95
RI076063	76mm-63mm	46.95
RI076070	76mm-70mm	46.95
RI102076	102mm-76mm	98.65
RI102089	102mm-89mm	98.65
RI114102	114mm-102mm	98.65
RI127102	127mm-102mm	98.65
RI127114	127mm-114mm	98.65
RI140127	140mm-127mm	98.65
RI152127	152mm-127mm	98.65
RI152140	152mm-140mm	98.65
RI178152	178mm-152mm	178.35
RI203178	203mm-178mm	184.50

PUROSIL HOSE

Purosil Radiator Hose

70 Series Radiator Hose

The 70 series hoses feature 4 ply polyester reinforcement and are ozone and oil splash resistant. Resistant to electrochemical degradation. Suitable for temperatures between -50° C and 180° C (-60° F to 350° F). Burst pressures range from 233-700PSI depending on hose size. Meets or Surpasses SAE-J20-R1-H.T. Class A, Mil Spec A-A-52426 and various heavy duty O.E.M. requirements.



Product Code	I.D. mm	O.D. mm	B.P.Bar	Kg/mt	Length mm	List Price per mtr
5515-050	12.7	20.8	34.5	.24	1000	173.50
5515-075	19.1	27.2	32.7	.36	1000	205.85
5515-087	22.2	30.4	32.2	.42	1000	235.20
5515-100	25.4	35.5	31.0	.48	1000	235.20
5515-112	28.6	36.7	30.0	.54	1000	257.30
5515-125	31.8	39.9	29.3	.60	1000	257.30
5515-138	34.9	43.1	27.6	.65	1000	350.15
5515-150	38.1	46.2	25.8	.71	1000	350.15
5515-162	41.3	49.4	24.1	.77	1000	350.15
5515-175	44.5	52.6	20.7	.83	1000	350.15
5515-187	48	57	18.1	.90	1000	350.15
5515-200	50.8	58.9	17.2	.95	1000	402.95
5515-212	54.0	62.1	16.2	1.01	1000	444.55
5515-225	57.2	65.3	15.5	1.07	1000	449.25
5515-238	60.3	68.5	14.5	1.13	1000	467.70
5515-250	63.5	71.6	13.8	1.19	1000	467.70
5515-275	69.9	78.0	13.8	1.31	1000	500.10
5515-287	73.0	84.0	13.8	1.40	1000	578.85
5515-300	76.2	84.3	13.8	1.43	1000	578.85
5515-350	88.9	97	10.3	1.67	1000	666.90
5515-400	101.6	109.7	8.6	1.28	1000	722.40
5515-450	114.3	122.4	6.9	1.44	1000	778.10
5515-500	127.0	135.1	6.2	1.60	1000	992.35
5515-550	140.0	160.5	6.2	1.98	1000	1 072.55

Purosil Turbocharger Hose

364 Series Turbocharger Hose

Purosil 364 series hose is made from 4 ply aramid reinforced silicone. Unlike some silicone hoses purosil silicone hose has good flexibility and is suitable for temperatures ranging from -50° C to 260° C (-60° F to 500° F).




Product Code	I.D. mm	O.D. mm	B.P.Bar	Kg/mt	Length mm	List Price
7701-150	38.1	46.2	8.5	.24	1000	335.10
7701-175	44.5	52.6	8.5	.36	1000	424.20
7701-200	50.8	58.9	7.5	.42	1000	455.30
7701-225	51.2	65.3	7.5	.48	1000	560.35
7701-250	63.5	71.6	6.4	.60	1000	597.30
7701-275	69.9	78.0	5.7	.71	1000	626.95
7701-300	76.7	84.3	5.4	.77	1000	707.85
7701-338	85.8	93.9	4.6	.83	1000	716.00
7701-350	88.9	97.0	4.6	.95	1000	780.35
7701-375	95.3	103.4	3.2	1.01	1000	883.90
7701-400	101.6	109.7	3.2	1.07	1000	924.25

PUROSIL HOSE

Purosil Silicone Wet Exhaust Hose

Purosil silicone wet exhaust hose features multiply polyester reinforcement and is available in **1 METRE LENGTHS**. Finished in a bright glossy blue. Maximum temperature 180° C (350° F). Rated to SAE J2006 R3.



Product Code	Size (I.D.)	List Price per metre
21-0400	102mm	777.60
21-0500	127mm	933.20
22-0600	152mm	1 116.65
22-0800	203mm	2 226.00
22-1000	254mm	2 671.15
22-1200	305mm	3 260.85
22-1400	356mm	3 839.10

Purosil Silicone Wet Exhaust Hump Hose - Single Hump

Purosil silicone wet exhaust hump hoses are rated to SAE J2006 R3 and feature multiply polyester reinforcement. Finished in a bright glossy blue. Maximum temperature 180° C (350° F).



Product Code	Size (I.D.)	Length	List Price each
S2141-0400	102mm	150mm	420.85
S2141-0500	127mm	150mm	514.30
S2161-0600	152mm	205mm	619.85
S2161-0800	203mm	205mm	896.20
S2161-1000	254mm	310mm	1 173.70
S2161-1200	305mm	310mm	1 776.85
S2161-1400	356mm	310mm	3 015.65

Purosil Silicone Wet Exhaust Hump Hose - Double Hump

Purosil silicone wet exhaust hump hoses are rated to SAE J2006 R3 and feature multiply polyester reinforcement. Finished in a bright glossy blue. Maximum temperature 180° C (350° F).



Product Code	Size (I.D.)	Length	List Price each
D2242-0400	102mm	355mm	465.35
D2242-0500	127mm	355mm	971.35
D2262-0600	152mm	355mm	1 439.65
D2262-0800	203mm	355mm	1 528.70
D2262-1000	254mm	355mm	1 678.70
D2262-1200	305mm	355mm	2 630.70
D2262-1400	356mm	355mm	2 829.60

PUROSIL ELBOWS

Purosil Silicone Wet Exhaust Elbows 90°

Purosil silicone wet exhaust 90° elbows are rated to SAE J2006 R3 and feature multiply polyester reinforcement. Finished in a bright glossy blue. Maximum temperature 180° C (350° F)



Product Code 90°	Size I.D.	Leg Length	List Price per each
M9068-500	127mm	152mm x 152mm	911.45
M9068-600	152mm	210mm x 210mm	1 873.20
M9068-800	203mm	254mm x 254mm	1 945.65
M9068-1000	254mm	305mm x 305mm	3 938.55

Purosil Silicone Wet Exhaust Elbows 45°

Purosil silicone wet exhaust 45° elbows are rated to SAE J2006 R3 and feature multiply polyester reinforcement. Finished in a bright glossy blue. Maximum temperature 180° C (350° F)



Product Code 45°	Size I.D.	Leg Length	List Price per each
M9066-500	127mm	152mm x 152mm	911.45
M9066-600	152mm	210mm x 210mm	2 197.05
M9066-800	203mm	254mm x 254mm	2 708.20
M9066-1000	254mm	305mm x 305mm	4 041.40

HOSES, DUCTING, SHEET RUBBER & GASKETS

PUROSIL HOSE

Purosil Silicone Heater Hose

80 Series Heater Hose

Silicone heater hose meets and exceeds all performance and physical characteristics of SAE-J20-R3. This hose is very flexible and features a polyester reinforced wall. Suitable for temperatures ranging from -50° C to 180° C (-60° F to 350° F). Burst pressures range from 200 to 480 PSI.



Product Code	I.D.	O.D.	B.P.Bar	Kg/mt	Length mtr	List Price per mtr
5526-025/15	6	15	22.1	N/A	15	55.85
5526-031/15	8	18	21.4	N/A	15	69.50
5526-038/15	10	18	21.4	N/A	15	76.50
5526-050/15	13	25	21.4	N/A	15	92.65
5526-063/15	16	26	20.7	N/A	15	95.20
5526-075/15	19	27	20.7	N/A	15	121.30
5526-087/15	22	35	17.2	N/A	15	121.30
5526-100/15	25	35	17.2	N/A	15	144.10

Purosil Silicone 90° Elbows

90 Series Coolant Elbows

Coolant elbows are manufactured to the same specifications as the 70 Series Radiator Hose.



Product Code	I.D. mm	List Price
90-050	13	256.25
90-062	16	256.25
90-075	19	256.25
90-100	25	275.00
90-125	32	345.80
90-150	38	345.80
90-175	44	345.80
90-200	51	345.80
90-225	57	371.90
90-250	63	476.45
90-275	70	476.45
90-300	76	514.80
90-350	90	566.00
90-400	102	566.00

Purosil Silicone 45 Deg Elbows



Product Code	I.D. mm	List Price
9046-100	25	268.40
9046-125	32	285.90
9046-150	38	362.55
9046-175	44	362.55
9046-200	50	378.90
9046-225	57	378.90
9046-250	63	407.15
9046-275	70	407.15
9046-300	76	432.60
9046-350	89	544.40
9046-400	102	632.25

HOSES, DUCTING, SHEET RUBBER & GASKETS

DUCTING

T7W (unbraided) Flexible Ducting

Construction: Medium weight thermoplastic rubber hose reinforced with a spring steel wire helix & external polypropylene wear strip

Temperature Range: -50°C to 135°C

Standard Colour: Black with yellow wear strip

Standard Lengths: 15.2 metres

Market Applications: Dust control, car wash, furnace duct cleaning, fume extraction, suction & discharge of abrasive products

Features:

- Most general all purpose ducting
- Wear strip offers additional external & drag resistance
- Designed for applications with wide temperature range
- Great moisture & UV resistance
- Excellent chemical resistance
- Smooth interior assures minimal friction loss & efficient air flow

Product Code	I.D.	List Price per mtr
RFH051	2	62.10
RFH057	2¼	91.85
RFH065	2½	74.15
RFH075	3	82.55
RFH090	3½	101.00
RFH100	4	106.65
RFH110	4½	115.15
RFH127	5	118.10
RFH150	6	130.70
RFH180	7	152.60
RFH203	8	178.70
RFH250	10	219.95
RFH300	12	321.90

