


DT-XP40A Panels

Enclosed Contactor Panels

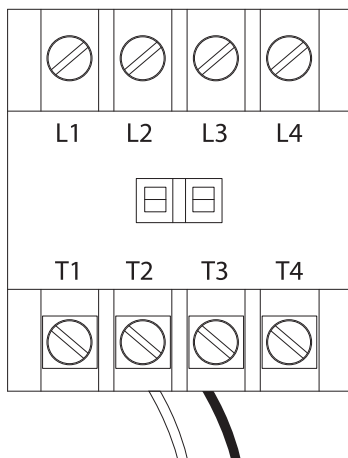

Detail 1. DT-XP40A Contactor

NOTE

120 VAC Coil with black and white lead wires for quick installation included.

DESCRIPTION

Delta-Therm enclosed contactor panels contain all UL recognized components installed inside of a UL Listed NEMA 1 enclosure.

ENCLOSED CONTACTOR PANELS

- Contactor Rating 40FLA (50A Resistive), 600 VAC Max.
- Contactor Coil Voltage 120 VAC.
- Controls Sold Separately.

Enclosure:	NEMA 1
H/W/D:	10/8/4 Inches (25/20/10cm)
Contains:	One 4 pole contactor rated at 50A (resistive)
Controls:	2 Circuits at 208/240/480 VAC or 4 Circuits at 120/277 VAC

MODEL # DT-8P40A

Enclosure:	NEMA 1
H/W/D:	10/10/4 Inches (25/25/10cm)
Contains:	Two 4 pole contactor rated at 50A (resistive)
Controls:	4 Circuits at 208/240/480 VAC or 8 Circuits at 120/277 VAC

MODEL # DT-12P40A

Enclosure:	NEMA 1
H/W/D:	12/12/4 Inches (30/30/10cm)
Contains:	Three 4 pole contactor rated at 50A (resistive)
Controls:	6 Circuits at 208/240/480 VAC or 12 Circuits at 120/277 VAC

MODEL # DT-16P40A

Enclosure:	NEMA 1
H/W/D:	16/12/4 Inches (40/30/10cm)
Contains:	Four 4 pole contactor rated at 50A (resistive)
Controls:	8 Circuits at 208/240/480 VAC or 16 Circuits at 120/277 VAC

APPLICATIONS

Pipe Tracing, Snow Melting, Roof Deicing, Floor Warming, Zoo Dens, Specialty Heating.

APPROVALS

UL Listed for the U.S. and Canada

