




Stock and Specialty Roof Clips

Aluminum and Copper



DT-AS-5020



RM-25-AL




RM-25-CU




RM-AL6 / RM-CU6




S5S Clip & Clamp

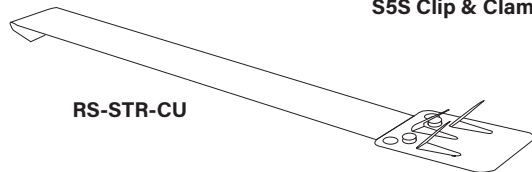


RS-STR-CU

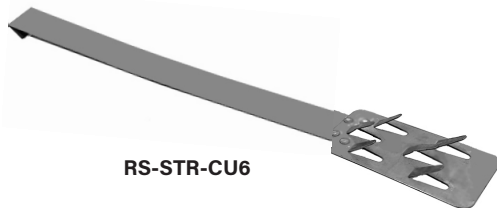

RS-STR-CU6

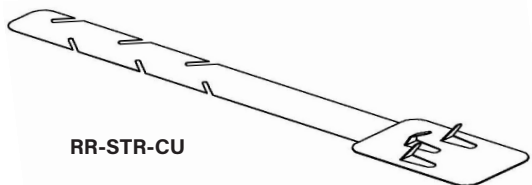

RR-STR-CU

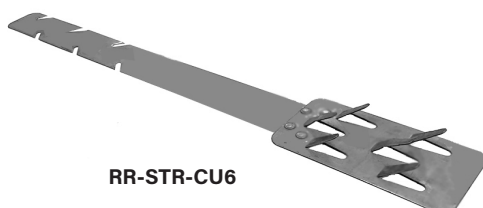

RR-STR-CU6

STOCK CLIPS

The DT-AS-50 and RM-25-AL are stock roof clips for asphalt shingle and metal roofs.

ELB-RCLIP

Aluminum clips for asphalt shingle roofs (package of 50). It has 20 holes for adhesive strength. Clips can be installed on asphalt shingle and metal roof materials using SB-190 adhesive.

RM-25-AL

Aluminum clips for metal roofs (package of 25). Clips can be installed on standing seam metal roofs using SB-190 adhesive (SB-190 cannot be used on copper materials or rubber membrane materials) or VHB pads (VHB pads cannot be used on asphalt shingles or rubber membrane materials).

SPECIALTY CLIPS

Specialty clips are available by special order.

S5S CLIP & CLAMP

Single run aluminum clip and clamp for attachment to standing seams on metal roofs.

RM-25-CU

Single run copper clips for metal roofs (package of 25).

RM-AL6 AND RM-CU6

Dual run aluminum or copper clips for metal roofs.

RS-STR-CU AND RS-STR-CU6

13.5" hooked copper strap with single and dual run clips for slate or cedar shake shingle. Custom lengths available.

RR-STR-CU AND RR-STR-CU6

13.5" slotted copper strap with single and dual run clips for slate or cedar shake shingle. Custom lengths available.

INSTALLATION

Please refer to adhesive directions for minimum application temperature and duration of adhesive curing time before installing the de-icing cable. Check primer requirements if using VHB pads.

RS and RR clips are mechanically fastened and do not require adhesive.

Copper clips are soldered to copper roof materials.

NOTE: Do not use DT-AS-50 clips with VHB pads. Do not use SB-190 with copper or rubber membrane materials.