POWER EQUIPMENT



HUSTLER® IS THE BRAND YOU CAN RELY ON

Across the globe, the Hustler brand signifies innovation, strength, performance, and superior customer care. Our mission is to provide the most dependable, useful, and time-saving products in outdoor maintenance, while priding ourselves in unmatched customer loyalty.





PRESSURE WASHERS



HH3324

- > 3300 PSI @ 2.4 GPM.
- Easy to use.
- Compact design.
- Lightweight and small enough for one person to easily transport.
- ► Great for cleaning decks, patios, siding, outdoor furniture and prepping home exteriors for painting.

SPECIFICATIONS

ENGINE PUMP HONDA® GC190 OEM TECHNOLOGIES™ CAM PUMP

PSI **GPM** 3300 2.4

HOSE **NOZZLES** MORFLEX™ 1/4" x 25'


0°, 15°, 25°, 40°, SOAP







Restrictions apply. See your Authorized Hustler Dealer for warranty details.



Innovative Pump Design

Equipped with a maintenancefree OEM Technologies™ axial cam pump.



Strength & Flexibility

MorFlex™ hose with a polyurethane jacket is up to three times more abrasive resistant than rubber while remaining lightweight and kink resistant.



Ergonomic Side Assist Spray Gun

Professional-style spray gun with ergonomic 360° rotating handle.

HH3725

- > 3700 PSI @ 2.5 GPM.
- ► Powerful Honda® engine.
- Reliable triplex pump.
- ▶ Ultra-lightweight aircraft-grade aluminum frame.
- ► Ensures professional-grade cleaning for your fleet and facility maintenance.

SPECIFICATIONS

ENGINE PUMP

HONDA® GX200 AAA™ INDUSTRIAL TRIPLEX PUMP

PSI **GPM** 3700 2.5

HOSE **NOZZLES**

MONSTER™ STEEL-BRAIDED 0°, 15°, 25°, 40°, SOAP AND TURBO 3/8" x 50'



Innovative Pump Design

External unloader with external bypass for fast and easy maintenance as well as increased pump protection.

Strength & Flexibility

Dual-braided MONSTER Hose™ with polyurethane outer jacket that is non-marring and three times more abrasion resistant than rubber hose.



Maximum Cleaning

Turbo nozzle delivers a faster and deeper clean with a powerful oscillating jet.





PRESSURE WASHERS



Restrictions apply. See your Authorized Hustler Dealer for warranty details.



PRESSURE WASHERS



HH4035

- ▶ 4000 PSI @ 3.5 GPM.
- Powerful Honda® engine.
- Reliable triplex pump.
- ▶ Ultra-lightweight aircraft-grade aluminum frame.
- Provides a pro-clean for oversized jobs.

SPECIFICATIONS

ENGINE HONDA® GX270

PSI 4000

HOSE

MONSTER™ STEEL-BRAIDED 0°, 15°, 25°, 40°, SOAP AND TURBO 3/8" x 50'

PUMP AAA™ INDUSTRIAL TRIPLEX PUMP

GPM 3.5

NOZZLES







Restrictions apply. See your Authorized Hustler Dealer for warranty details.



Innovative Pump Design

External unloader with external bypass for fast and easy maintenance as well as increased pump protection.



Strength & Flexibility

Dual-braided MONSTER Hose™ with polyurethane outer jacket that is non-marring and three times more abrasion resistant than rubber hose.



Maximum Cleaning

Turbo nozzle delivers a faster and deeper clean with a powerful oscillating jet.

HH4240

- ► 4200 PSI @ 4.0 GPM.
- ▶ Belt-driven.
- ▶ Built for long continuous running hours.
- Perfect for facility, fleet and property jobs that require extended cleaning times.

SPECIFICATIONS

ENGINE HONDA® GX390	PUMP AAA™ INDUSTRIAL TRIPLEX
DCI	CDM

191 UPIVI 4200 4.0

HOSE **NOZZLES**

MONSTER™ STEEL-BRAIDED 0°, 15°, 25°, 40°, SOAP AND TURBO 3/8" x 50'





Innovative Pump Design

External unloader with external bypass for fast and easy maintenance as well as increased pump protection.



Strength & Flexibility

Dual-braided MONSTER Hose™ with polyurethane outer jacket that is non-marring and three times more abrasion resistant than rubber hose.



Maximum Cleaning

Turbo nozzle delivers a faster and deeper clean with a powerful oscillating jet.





Restrictions apply. See your Authorized Hustler Dealer for warranty details.

FRAME

PRESSURE WASHERS WASHER COMPARISON



HH4440

- ► 4400 PSI @ 4.0 GPM.
- ► Powerful Honda® engine.
- ► Reliable triplex pump.
- ▶ Ultra-lightweight aircraft grade aluminum frame.
- ▶ Built to perform in a wide range of commercial cleaning applications.

SPECIFICATIONS

ENGINE PUMP
HONDA® GX390 AAA™ INDUSTRIAL TRIPLEX PUMP

PSI4400
4.0

HOSE NOZZLES

MONSTER™ STEEL-BRAIDED 0°, 15°, 25°, 40°, SOAP AND TURBO 3/8" x 50'







 ${\it Restrictions apply.} \ {\it See your Authorized Hustler Dealer for warranty details}.$



Innovative Pump Design

External unloader with external bypass for fast and easy maintenance as well as increased pump protection.



Strength & Flexibility

Dual-braided MONSTER Hose™ with polyurethane outer jacket that is non-marring and three times more abrasion resistant than rubber hose



Maximum Cleaning

Turbo nozzle delivers a faster and deeper clean with a powerful oscillating jet.

PRESSURE WASHERS COMPARISON



	НН3324	HH3725	HH4035	HH4240	HH4440
Engine	Honda® GC190	Honda® GX200	Honda® GX270	Honda® GX390	Honda® GX390
PSI	3300	3700	4000	4200	4400
GPM	2.4	2.5	3.5	4.0	4.0
Hose	MorFlex™ ¼" x 25'	Monster Hose™ Steel-Braided ¾" x 50'			
Pump	OEM Technologies Axial Cam Pump	AAA Industrial Triplex Pump			
Nozzles	0°, 15°, 25°, 40°, Soap	0°, 15°, 25°, 40°, Soap and Turbo			

than rubber hose.

WASHER ACCESSORIES WASHER ACCESSORIES

HOSES

MONSTER HOSE™



LENGTH	MAX PSI	TEMP	ID	FITTING
50"	4500	140° F	3/8"	3/8" QC
100"	4500	140° F	3/8"	3/8" QC



STRENGTH & FLEXIBILITY - Dualbraided MONSTER Hose™ with polyurethane outer jacket that is non-marring and three times more abrasion resistant than rubber hose.

MORFLEX™ HOSE



LENGTH	MAX PSI	TEMP	ID	FITTING
50"	3700	140° F	5/16"	M22*



LIGHTWEIGHT & FLEXIBLE - MorFlex™
Hose with a polyurethane jacket is
up to three times more abrasion
resistant than rubber while remaining
lightweight and kink resistant.

NOZZLES

TURBO NOZZLES



LENGTH	MAX PSI	TEMP	ID
OSCILLATING TURBO NOZZLE	3600	3.0	140° F
OSCILLATING TURBO NOZZLE	4500	4.0	140° F

- Creates a powerful jet of oscillating water.
- Cleaning impact of a 0° nozzle.

NOZZLE SETS



	MAX PSI	ORIFICE SIZE	MAX TEMP
SET OF FIVE SPRAY NOZZLES 0°, 15°, 25°, 40° AND SOAP	3600	3.0	140° F
SET OF FIVE SPRAY NOZZLES 0°, 15°, 25°, 40° AND SOAP	4500	4.0	140° F

- Universal to fit pressure washers with quick-connect spray wands.
- Array of spray patterns, from pin point for those tough jobs to wide fan for maximum coverage.

SCRUBBERS

SURFACE SCRUBBER



DISCRIPTION	MAX PSI	DIAMETER
SURFACE SCRUBBER	3600	15"

- Uniformly cleans large surfaces such as garage floors, driveways, patios and decks quickly.
- ► High-quality assembly includes powder-coated steel shroud and stainless steel nozzles.
- ► Two high-pressure nozzles for quick streakfree cleaning.

SURFACE SCRUBBER

DISCRIPTION	MAX PSI	DIAMETER
SURFACE SCRUBBER	4500	20"

- Equipped with in-line filter to prevent nozzle obstruction and pump damage.
- Two high-pressure, stainless steel nozzles for quick streak-free cleaning free cleaning.

GUNS

SPRAY GUN



DISCRIPTION	MAX PSI	MATEMP
SPRAY GUN WITH ERGONOMIC GRIP	4500	140° F

- Pro-style ergonomic design with side-assist grip and easy pull trigger for comfort and ease of use
- Includes a 3/8" quick-connect plug adapter so gun can connect to MONSTER and/or MorFlex hoses.

PRO GUN HANDLE




11


DISCRIPTIONMAX PSIMATEMPSPRAY GUN WITH
ERGONOMIC GRIP5000212° F

- ► Hot and cold water application capable
- Pro-style ergonomic design and easy pull trigger for comfort and ease of use
- Includes adapters so gun can connect to MONSTER and/or MorFlex hoses

* Includes hose adapter for connecting multiple hoses

10

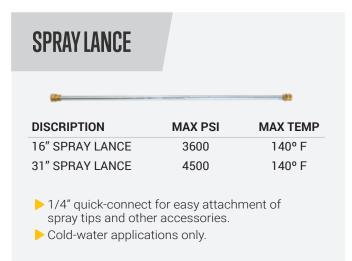

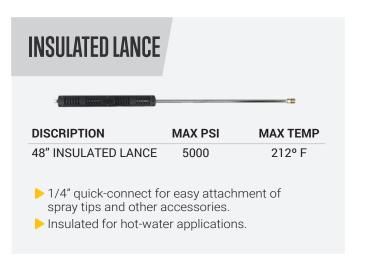



INVERTER GENERATOR GENERATORS







Restrictions apply. See your Authorized Hustler Dealer for warranty details.


HIG2200

- ▶ LED warning lights for low oil & power overload.
- ▶ 8-hour run time at 50% load.
- ► Sound pressure level: 63 dB(A) at 23 feet.

SPECIFICATIONS

ENGINE HUSTLER® ENGINE CC 79cc

STARTING WATTS
2200
FUEL TANK CAPACITY
1.2 GAL



HPGH5500

- ► Low-oil engine shutdown protection.
- Less then 5% harmonic distortion (THD) for safely running sensitive electronics.
- ► GFCI protection.
- Copper alternator windings.
- Convenient fold-down handle for easy maneuverability & storage.
- Durable never-flat tires.
- ► Sound pressure level: 76 dB(A) at 23 feet.

SPECIFICATIONS

ENGINE ENGINE CC
HONDA® GX270 270cc

STARTING WATTS

FUEL TANK CAPACITY
7.9 GAL

ON CENTER 120V, 30A 120V/240V 30A 120V/240V 30A

GROUND TERMINAL





Restrictions apply. See your Authorized Hustler Dealer for warranty details.



GENERATORS GENERATORS



HPGH8500

- ► Low-oil engine shutdown protection.
- Less then 5% harmonic distortion (THD) for safely running sensitive electronics.
- ▶ GFCI protection.
- ▶ Convenient fold-down handle for easy maneuverability & storage.
- Durable never-flat tires.
- Copper alternator windings.
- ► Sound pressure level: 80 dB(A) at 23 feet.

SPECIFICATIONS

ENGINE

ENGINE CC

HONDA® GX390

389cc

STARTING WATTS

FUEL TANK CAPACITY

7.9 GAL

Restrictions apply. See your Authorized Hustler Dealer for warranty details.





















HPGH8500E

- ► Electric start.
- Low-oil engine shutdown protection.
- Less then 5% harmonic distortion (THD) for safely running sensitive electronics.
- ▶ GFCI protection.
- Convenient fold-down handle for easy maneuverability & storage.
- Durable never-flat tires.
- Copper alternator windings.
- ► Sound pressure level: 80 dB(A) at 23 feet.

SPECIFICATIONS

ENGINE HONDA® GX390

289cc

ENGINE CC

STARTING WATTS

7.9 GAL

CENTER









FUEL TANK CAPACITY





2-120V, 20A







2-120V, 20A







GROUND TERMINAL

Restrictions apply. See your Authorized Hustler Dealer for warranty details.

16

FLUID PRODUCTS

GENERATOR COMPARISON



	HIG2200	HPGH5500	HPGH8500	HPGH8500E
Engine	Hustler®	Honda® GX270	Honda® GX390	Honda® GX390
Engine CC	79cc	270cc	389cc	389cc
Run Time (50%)	8 HRS	-	-	-
Running Watts	1800	4500	7500	7500
Starting Watts	2200	5500	8500	8500
Fuel Tank Capacity	1.2 GAL	7.9 GAL	7.9 GAL	7.9 GAL
Auto Engine Shutoff	N	Υ	Υ	Υ
Electric Start	N	N	N	Υ

Restrictions apply. See your Authorized Hustler Dealer for warranty details.

HUSTLER® FLUID PRODUCTS

Hustler Turf's motor oil, fuel stabilizer and hydrostatic transmission oil products will help keep your machine running smoothly. Ask your local dealer about availability of these products.



TRANSMISSION OIL

- ► Guards against heat, sludge and harmful deposits.
- Excellent hot- and cold-weather performance.
- Strong anti-wear protection.
- Helps maintain tight pump and motor tolerances which keep the transmission operating efficiently.



FUEL STABILIZER

- ► Triple corrosion protection for longer lasting engine components.
- Prevents gasoline oxidation for easier starts after storage or downtime.
- Effective in all gasoline, including ethanol blends.
- Powerful antioxidants to help prevent acids from forming.

MOTOR OIL

- Anti-wear additive package that protects engines from harmful wear.
- Detergent/dispersant content maintains engine cleanliness.
- Excellent hot- and cold-temperature performance.
- Multi-viscosity product meets SAE 10W-30.

TEST	PROCEDURE	RESULTS (TYPICAL)
Viscosity 100°C, cSt	D445	10.9
Viscosity 40°C, cSt	D445	72.8
Viscosity Index	D2270	138
Pour Point °C (°F)	D97	-38 (-36)
Four Ball Wear Test (75°C, 1200 rpm, 40 kg, 1 hr)	D4172	.43
Total Base Number (TBN)	D2896	8.4
CHEMICAL PROPERTIES		
Calcium	-	0.2236%
Phosphorus	-	0.0746%
Zinc	-	0.0778%
Molybdenum	-	0.0037%

18



©2020 HUSTLER TURF EQUIPMENT

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT WWW.HUSTLERTURF.COM FOR THE MOST CURRENT SPECIFICATIONS.

HUSTLERTURF.COM