



HAILO S100 PROFILOT

3-section aluminium combination ladder with LOT System for level adjustment.

THE KEY FEATURES

- LOT System: compensates for uneven ground up to 15 cm. Adjusted by pedal
- Versatile to use as a lean-to, extending or trestle ladder.
- 2 attachable full surface-contact feet and 2 large stable claw feet




OTHER PRODUCT ADVANTAGES


- Locking hook with transport locking mechanism
- Length and cross-profiled rungs
- With step adjustment option (9306-507 / 9309-507)
- Non-removable third ladder section (9312-507)
- Max. load capacity 150kg

PROPERTIES

- Rungs: 3 x 12
- Working height: max. 900 cm
- Weight: approx. 29.2 kg

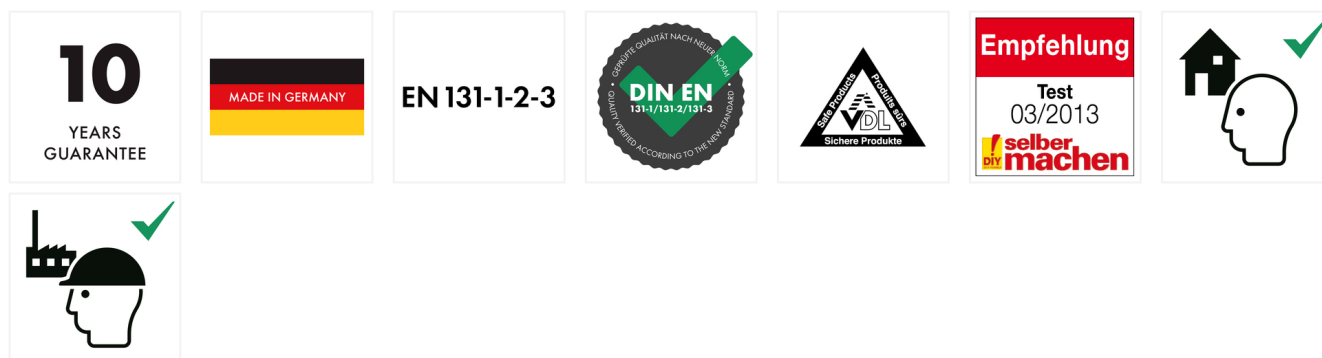

SPECIFICATIONS

LOT System		✓
Can be used as lean-to ladder or free-standing ladder		✓
Can be used in a free-standing position		✓
Can be used as lean-to ladder		✓
Number of steps		3 x 12
Width/depth required for setting up lean-to ladder		A = 150 cm, B = 216 cm
Width/depth required for setting up extending ladder		A = 150 cm, B = 221 cm
Height of lean-to ladder		807 cm
Height of extending ladder		555 cm
Max. working height		900 cm
Max. working height of trestle ladder		440 cm
Max. working height of lean-to ladder		900 cm



Max. working height of extending ladder



600 cm

Dimensions of packaging (HxWxD)



A = 360 cm, B = 48 cm, C = 21 cm

Weight



29.2 kg