


Universe	Professional
Type	Verticality
Category	Lanyards and energy absorbers
Subcategory	Fall arrest lanyards




ABSORBICA-Y MGO European version

ABSORBICA-Y MGO is a double lanyard with compact energy absorber, designed for progression on a vertical structure or a horizontal lifeline and when passing intermediate anchors. It is available in two lengths: 80 or 150 cm versions (without connectors). The 150 cm version has elasticized arms, to avoid hindering progression. With two MGO large-opening connectors, it is certified to European and Russian standards.

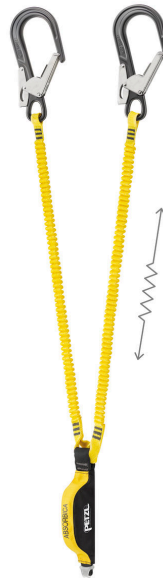

The ABSORBICA-Y lanyards with two arms allow for continuous protection, by successively detaching and re-attaching the two arms.



In the event of a fall, the tearing of the energy absorber webbing limits the impact force on the user. The lanyards are designed for users who weigh between 50 and 130 kg. The progressive tearing of the webbing reduces the deceleration on lightweight users.





The energy absorber is very compact, to avoid hindering the user's movements, or interfering with handling. A durable fabric pouch helps protect the energy absorber from abrasion and potential contaminants.

Short Description Double lanyard with integrated energy absorber and MGO connectors

- Selling Points**
- Designed for progression on a vertical structure or horizontal lifeline, and when passing intermediate anchors
 - Absorbs energy in the event of a fall:
 - tearing of the energy absorber webbing limits the impact force on the user
 - works with users who weigh between 50 and 130 kg
 - progressive tearing reduces the deceleration on lightweight users
 - Minimal bulk:
 - compact energy absorber facilitates handling
 - FLEX version with 150 cm of elasticized webbing to avoid hindering progression
 - Durable fabric pouch with opening system at each end, protects the energy absorber from abrasion or contaminants while allowing for regular inspection of the absorber
 - Two options for installation on the harness, depending on use:
 - frequent connection/disconnection: using either a carabiner held in correct position by the STRING positioning accessory (included with the lanyard), or a MICRO SWIVEL to avoid tangling
 - semi-permanent connection: using either a RING OPEN gated ring whose circular shape ensures optimal positioning, or a SWIVEL OPEN to avoid tangling
 - Comes with two large-opening MGO connectors for connection to metal structures
 - Available in two lengths: 80 and 150 cm

-
- Specification**
- Material(s): polyester, nylon, high-modulus polyethylene, aluminum
 - Certification(s): CE EN 355 when used with EN 362, EAC connector
-

Specifications by reference

Reference(s)	L012CA00	L014CA01
		
Version	-	FLEX
Length without connectors	80 cm	150 cm
Connector	MGO	MGO
Length with connectors	130 cm	200 cm
Weight	1290 g	1350 g
Made in	RO	RO
Guarantee	3 years	3 years
Packing	1	1
Case quantity	5	5
EAN	3342540831742	3342540831629

Related product(s) NEWTON European version
 VOLT® European version
 OK
 Am'D
 RING OPEN
 MICRO SWIVEL