

**3M™ DBI-SALA® Saflok™ Concrete Wedge Anchor**



Part Number	Weight (kg)
2100100	0.30

Quick-release button for fast removal with a pivoting easy-grip handle. Innovative forged connection ring provides a compatible tie-off point. Shielded load cable and chock release cables.

**3M™ DBI-SALA® Saflok™ Toggle Anchor**



Part Number	Weight (kg)
2100103	0.35

Installs into concrete or steel in seconds. Activator cable provides toggle mode selection (open or lock). Position indicator visually notifies user if locked or unlocked. Swivelling D-Ring provides a compatible tie-off point.


**3M™ DBI-SALA® Detent Wall Anchor**



Part Number	Weight (kg)
2101005	0.45
2101001	0.16
2101003	0.25

Assembly comprising detent pin, socket, M6 allen key and cover cap. Use for floor, wall or ceiling type applications. Provides convenient tie-off points wherever needed. Push-button operation for fast and easy operation. Socket includes cover cap to hide recess, blending into the decor.

**3M™ DBI-SALA® Fixed Beam Anchor**

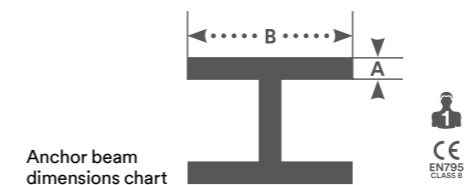

Part Number	A	B	Weight (kg)
2108412	3.81 cm	6.35 - 30.48 cm	2.40
2108413	3.81 cm	6.35 - 45.72 cm	2.70
2108414	3.81 cm	6.35 - 60.92 cm	3.00
2108415	6.35 cm	30.48 - 91.44 cm	4.00

Installs in seconds to the beam structure in any orientation, with final tightening using a built-in adjustment handle.

**3M™ DBI-SALA® I-Beam Trolley Anchor - Adjustable**



Part Number	Weight (kg)
2103148	6.80

The trolley is for use with self retracting lifelines on horizontal beams and has been engineered for ease-of-use and superior performance. Glides effortlessly along the beam and provides horizontal mobility. Attachable anywhere along beam, including midpoint. Non-corrosive double-shielded wheel bearings are maintenance free. Trolley Guards protect the wheels from damage and keep beam clear of debris.

**3M™ DBI-SALA® Polyester Webbing Sling**



Part Number	W	H	Weight (kg)
KM418	45 mm	83 cm	0.46
KM419	45 mm	90 cm	0.47
KM421	45 mm	200 cm	0.86

Sling Polyester Webbing and stainless steel links. Choke back facility on KM419 & KM421.

**3M™ DBI-SALA® Concrete D-ring Anchor**



Part Number	Quantity	Weight (kg)
2104565	1	0.50
2104566	6	0.60
2104567	12	3.00

Reusable D-Ring assembly. Rugged design for harsh environments. Safe 'hook-up' indicator notifies user of proper installation. Install into 18 mm or 19 mm holes - only standard drill bits needed.

**3M™ DBI-SALA® Window & Door Jamb Anchor**



Part Number	Weight (kg)
2100080	6.36

With 55 cm to 130 cm width adjustment. Non-penetrating design ensures no damage to structure. The anchor is simply compressed between the vertical sides of the door or window. Fast and easy installation with built-in adjustment knob - no tools or drilling are required.

**3M™ DBI-SALA® Glyder™ 2 Sliding Beam Anchor**



Part Number	Weight (kg)
2104700	2.05

Provides complete horizontal mobility on i-Beams, attach overhead or at your feet (use with 3M™ DBI-SALA® Force2™ Shock Absorbing Lanyard when used at your feet). 'Wear pads' eliminate metal-to-metal contact, for smooth operation. Integrated ratcheting adjustment system for easy installation. Dual beam grip adjustment prevents twisting and turning. User capacity: 141 kg.

**3M™ DBI-SALA® First-Man-Up™ Remote Anchoring System**



Part Number	Length	Description	Weight (kg)
2100094	1.80 - 7.80 m	Telescopic Rod	4.00
2100105	60 mm	Rod Connector	0.30

The telescopic rod connector allows you to attach a rope life line up to 8 m above the user, enabling the user to ascend a pylon or to reach the top of a pole in complete safety.

**3M™ DBI-SALA® Freestanding Rooftop Counterweight Anchor**



Part Number	Description	Weight (kg)
2100180	Counterweight anchor	327.00
2104190	Counterweight anchor lifting sling	8.60

The rooftop freestanding counterweight anchor does not require attachment to a working surface and provides a safe and versatile fall arrest rated tie-off point.