



Choosing the right Self-Retracting Lifeline (SRL).

DBI-SALA® and Protecta® are fall protection brands leading the development of innovative, reliable and versatile SRLs.

Our innovations include retractable lifelines, sealed SRLs, dual mode rescue SRLs, 3-way SRL with built in retrieval and fall impact indicator. These important safety innovations have now been widely adopted and appreciated by customers across all sectors of industry.

Whether your application requires single or twin-leg configurations, mounting to an overhead anchor or for connection directly to a harness, there are numerous models to choose from to suit almost any application.

Considerations when choosing your SRL:

Housing Construction

Thermoplastic - When lightweight is key
Aluminium - When ultimate durability is required.

Lifeline Material

Galvanised cable, stainless steel cable or web / synthetic lifeline material for varying environments.

Sealed Design

For harsh/corrosive environments like Oil & Gas applications.

Retrieval

Ideal for confined space rescue / retrieval applications for easy implementation of rescue plan solutions.

RSQ™ Dual Mode Design

Built-in rescue allows user to be lowered after a fall arrest either automatically or manually.

3M™ DBI-SALA®

FAST-Line™ Cable
Allows user to replace lifeline assembly in the field (available for 3M™ DBI-SALA® Sealed-Blok™ SRL only).

Harness Mount

Direct connection takes the hassle out of fall protection.

Sharp Edge Compliant

Specialised lifeline and external shock for leading edge, horizontal use, meeting the latest VG11 sharp edge requirements.

Self-Retracting Lifelines icons.



Housing



Double Action Swivel



Retrieval Winch



RSQ



Load Rating/ Capacity



Leading Edge



Self Locking Swivel Hook



Lifeline Material



Fall Indicator



Connector Material



Carabiner



Captive Eye



Rebar Hook



Scaffold Hook



Snap Hook



Swivelling Opening Hook



3M™ DBI-SALA® Saflok™ Carabiner



Webbing Width



Twin Leg



3M™ DBI-SALA® Sealed-Blok™ Self-Retracting Lifelines

Trusted

3M™ DBI-SALA® continues to set the standard for quality in fall protection. The Sealed-Blok SRL family has a fully comprehensive line of sealed SRLs and decades of proven field service.

Durable

- Stands up to the harshest environments
- Heavy-duty design
 - Corrosion resistant
 - Stainless steel end-plates
 - Aluminium housing

Reliable

- Dynamic components sealed inside the housing (IP69K rated)
 - Protects from particles entering product
 - Protected against complete or continuous submersion in water
- Decades of service
- Field proven in the world's toughest environments
- Design extends maintenance intervals and product longevity

Typical Applications

Oil rig drilling
 Confined space
 Saltwater environments
 Dirty environments
 Sewage plants

Typical Markets

Oil and gas
 Off-shore wind energy
 Mining
 Marina
 Utilities
 Waste water treatment
 Municipalities

Applications



Anti-Ratcheting Design

Stays locked on rigid and non-rigid (horizontal lifeline) anchors.

Sealed Design

(Patent Pending)
 Ensures efficient, safe operation under all working conditions - the only SRL to meet IP69K sealed rating.

141 kg Weight Capacity

Higher capacity for operator and tools.

Carrying Handle

Built-in design for easy transport with improved ergonomics.

Secondary Anchorage Point

Certified for "dropped objects"
 Protection Rated for fall arrest if primary anchor fails.

Retrieval Winch

3M™ DBI-SALA® Sealed-Blok™ Self Retracting Lifeline - RSQ™ Dual Mode Design

Allows user to select between fall arrest mode and descent mode.

5 mm Diameter Wire Rope

Stainless steel for corrosion resistance.

Self-Locking Swivel Hook

Limits lifeline twisting.

IP69K Rated

Pivoting Anchorage Loop

Centres the load.

Aluminium Housing

Provides exceptional strength, durability and corrosion resistance.

Stainless Steel End-Plate

Durable construction for harsh environments.

Tripod/Davit Arm Bracket

No tools required for install.

Ergonomic Cable Handle

Provides added comfort and ease-of-use when making connections.

Galvanised and Stainless Steel Cable

Abrasion resistant and corrosion resistant lifeline options.

3M™ DBI-SALA® FAST-Line™


Provides the user with ability to replace the lifeline in the field. Eliminates the need to service / reset the brake after a fall arrest.

Impact Indicator

Provides visual indication of Fall Arrest.

1630 kg (3600 lb) Gate

Reduces chances of accidental disengagement ("roll-out").

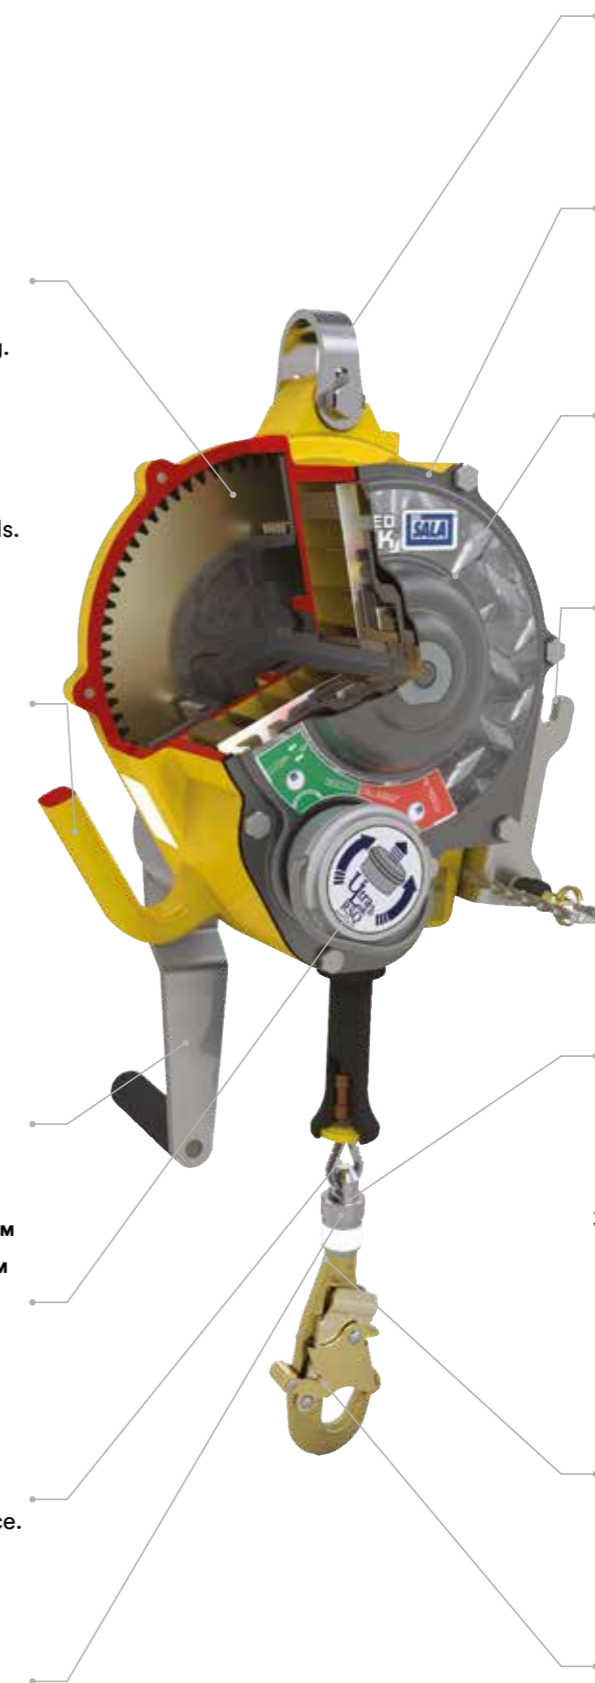

3M™ DBI-SALA® Sealed-Blok™ Cable Self-Retracting Lifeline - 4.5 m - 9 m



Best Seller
3400805

EN 360
EN 1496
(Retrieval models)

	←→	⚙	⚙	⚙	⚙	kg
3400830	4.5 m	SS	SS			6.00
3400805	9 m	SS	SS			9.00
3400856	9 m	SS	SS	■		12.00

Sealed-Blok Cable SRL - 15 m



Best Seller
3400956

EN 360
EN 341 CLASS D
(RSQ™ models)
EN 1496
(Retrieval models)

	←→	⚙	⚙	⚙	⚙	kg
3400950	15 m	G	G			13.00
3400951	15 m	SS	G			13.00
3400961	15 m	SS	SS		■	13.00
3400956	15 m	SS	SS	■		14.90
3400944	15 m	SS	SS	■	■	14.90

3M™ DBI-SALA® Sealed-Blok™ Cable Self-Retracting Lifeline - 53 m



3400656

EN 360

	←→	⚙	⚙	kg
3400656	53 m	G	G	56.50
3400658	53 m	SS	SS	56.50

Sealed-Blok Cable SRL - 25 m



Best Seller
3400881

EN 360
EN 341 CLASS D
(RSQ™ models)
EN 1496
(Retrieval models)

	←→	⚙	⚙	⚙	⚙	kg
3400867	25 m	SS	SS			22.00
3400881	25 m	SS	SS	■		23.50
3400917	25 m	SS	SS	■	■	23.50

Sealed-Blok Cable SRL - 40 m



Best Seller
3400986

EN 360
EN 1496
(Retrieval models)

	←→	⚙	⚙	⚙	⚙	kg
3400971	40 m	G	G			26.00
3400972	40 m	SS	SS			26.00
3400986	40 m	SS	SS	■		30.00

3M™ DBI-SALA® First-Man-Up™ Assisted Rescue Tool



	kg
3500202	3.00

First-Man-Up 4.8 m pole with rescue tool for Sealed-Blok RSQ™ SRL.

3M™ DBI-SALA® First-Man-Up™ Assisted Rescue Tool Fork



	kg
3500200	0.50

Rescue fork tool for Sealed-Blok RSQ SRL.

