

3M™ Protecta® Work Positioning Lanyard - Trigger



The Protecta adjustment system has been improved to give the option to easily adjust the length of the lanyard during use.

These versions have a triple action carabiner AJ572 with a zinc plated steel snaphook (ref: AJ523) and are available in different lengths. Max weight capacity: 140 kg.

	↔	∅	⚙️			⚙️			⚖️
1200314	Adj to 2 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	ⓐ	0.85
1200317	Adj to 3 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	ⓐ	0.92
1200315	Adj to 4 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	ⓐ	0.99

CE EN358

3M™ Protecta® Rope Work Positioning Lanyard - Adjustable




Braided rope work positioning lanyards available in a variety of diameters and connector combinations.

	↔	∅	⚙️			⚙️			⚖️
AL422	Adj. 2 m	10.5 mm	-	-	-	-	-	-	0.28
AL422/3	Adj. 2 m	10.5 mm	⚙️	17 mm	Ⓢ	⚙️	50 mm	ⓐ	1.00
AL423/5	Adj. 2 m	12.5 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	0.80

CE EN358

3M™ Protecta® Manustop™ Rope Work Positioning Lanyard

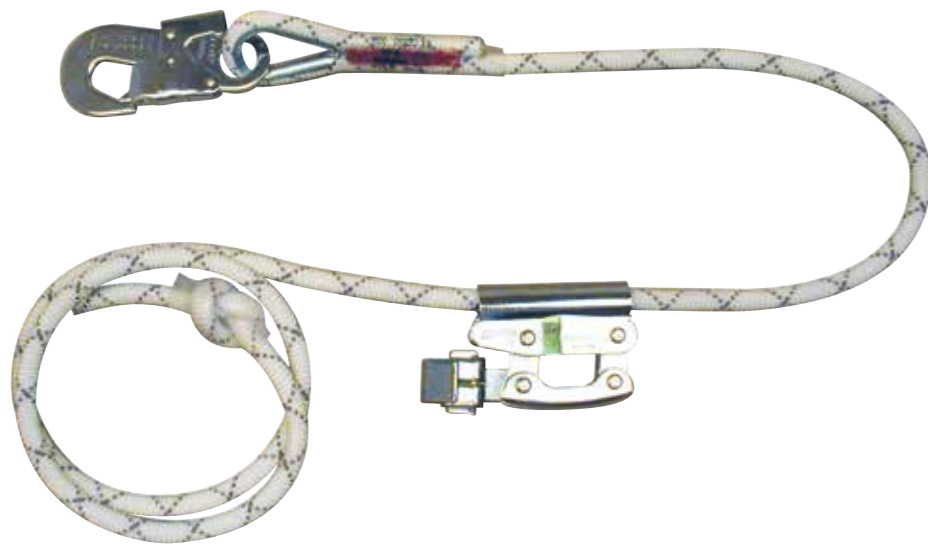

Manustop Rope work positioning lanyards available in a variety of lengths and connector combinations.

	↔	∅	⚙️			⚙️			⚖️
AF764T2	Adj. 2 m	12 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	1.01
AF795T2	Adj. 2 m	12 mm	⚙️	50 mm	Ⓢ	⚙️	50 mm	Ⓢ	1.32

CE EN354

CE EN358

3M™ Protecta® Web Work Positioning Lanyard



Web work positioning 45 mm lanyard, particularly suited to work on posts (wood or concrete). Easy to adjust roll bar buckle, even with one hand. Rigid section to facilitate passing the end of the strap around the pole.

	↔	∅	⚙️			⚙️			⚖️
AF725	2.5 m	17 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	0.80

CE EN358