


**Applications**

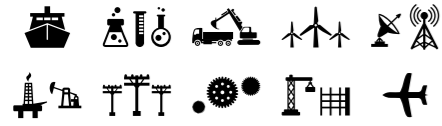

**3M™ Protecta® Cobra™ Vertical Lifeline Rope Grab**

- The Cobra rope grab device is available in 3 variants and a variety of different lengths to suit a wide variety of applications.
- The Cobra locks automatically when it is closed to ensure safe use.
- Its articulated cam, guarantees optimum slide of the rope and locks immediately in the event of a fall.
- A lever allows you to position the Cobra on the rope by hand, which makes it a fantastic tool for positioning or restraint.

15 kN  
CE EN353-2

		Description	Ø	kg
AC202/01	AJ501	with carabiner	12-14 mm	1.03
AC202/02	AJ565	with extension strap and shock pack	12-14 mm	1.15
AC202/03	AJ565	with extension strap	12-14 mm	1.11

The Cobra rope grab device is supplied with a twisted strand rope and is available with rope options available in 5 to 50 m lengths in increments of 5 m. The Rope Grab Device is available in 3 variants. AC202/3 includes a 200 mm extension strap and AC202/2 also incorporates a shock absorber with a 25 mm tear pack with an engaging force of 2 kN which reduces the impact force to less than 6 kN.

**Cobra Vertical Lifeline Rope**



CE EN353-2

			kg
AC205	5 m		0.91
AC210	10 m		1.53
AC215	15 m		2.17
AC220	20 m		2.60
AC225	25 m		3.41
AC230	30 m		3.50

14 mm Twisted 3 strand rope to be used with Cobra device with AJ501 carabiner fixed to one end.

**3M™ Protecta® First Rope Grab Fall Arrester**



CE EN353-2

		Ø	kg
AC2010	10 m	12 mm	1.20
AC2015	15 m	12 mm	1.62
AC2020	20 m	12 mm	2.11
AC2030	30 m	12 mm	2.89

Compact, automatic rope-grab fall arrester mounted onto rope.

**3M™ Protecta® Fixed Anchorage Plate**



Best Seller  
AM210

CE EN795 CLASS B

	kg
AM210	0.04

12 mm fixing. 3 mm thick.

**Mobile Anchor Point for Steel Structures**



CE EN795 CLASS B

	kg
AM201	0.68

Self fixing in hole from 20 to 22 mm. Can be used both horizontally and vertically.

**D-ring Anchorage**



EN 795 CLASS A

	kg
AM211	0.13

12 mm fixing. Can be used in 3 load directions.

**Galvanised Steel Sling**



CE EN795 CLASS B

		Ø	kg
AM401G	1 m	6 mm	0.29
AM402G	2 m	6 mm	0.47

Thimble ends and PVC protective sleeve.

**Nylon Webbing Sling**



CE EN795 CLASS B

		kg
AM450/60	25 mm x 60 cm	0.06
AM450/80	25 mm x 80 cm	0.07
AM450/100	25 mm x 100 cm	0.11
AM450/150	25 mm x 150 cm	0.25
AM450/200	25 mm x 200 cm	0.25

Four safety seams.