


# Thermo-Control®

The ultimate wood burning system.

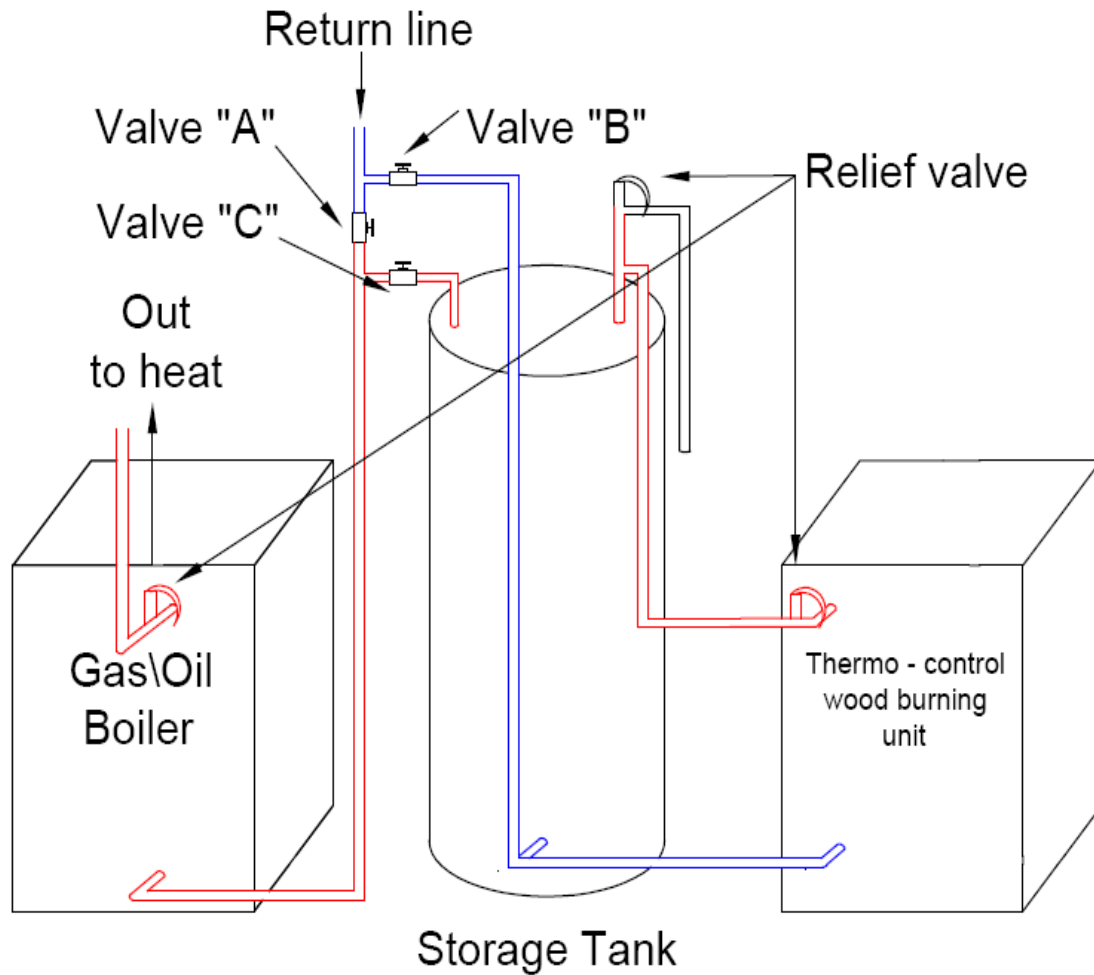

**Sample Installation—Thermo-Control Model 2500 ASME boiler with stainless steel hot water heating coils. Add on to existing gas or oil fired boiler.**

When operating wood burning unit, close valve A and open valves B & C. This will divert the return water into the storage tank where it will pick up heat from the Thermo-Control and send it to the existing gas or oil fired boiler.

The existing boiler will not fire the burner when the water from the tank exceeds the aquastat setting which will typically be set at 150 degrees.

The Thermo-Control should be set to maintain water at 160-180 degrees.