EOS Webcam Utility Beta Software

With so many of us relying on video calls to stay connected during these challenging times, the quality of that connection is key. With our EOS Webcam Utility Beta software, turn your compatible Canon camera into a high-quality webcam now!

Requirements:

⊘ A camera compatible with EOS Webcam Utility Beta software (see chart below)

⊘ A USB cable* to connect the camera to the computer

⊘ A computer with an internet connection and an operating system capable of running EOS Webcam Utility Beta software

The following are current system requirements: macOS Catalina (10.15), macOS Mojave (10.14) or macOS High Sierra (10.13), Intel Based Processor, 2GB RAM or greater, display screen resolution of 1,024x768 pixels or more, and approx. 32,000 colors or more.

Beta Release Notes:

- macOS® Catalina, macOS® Mojave and macOS® High Sierra are compatible with Google Hangouts™, Google Meet™ and Microsoft Teams.

- macOS® High Sierra are compatible with Zoom, WebEx® and Skype apps.

- macOS® Catalina & macOS® Mojave are **not** compatible with the native Zoom, WebEx®, Skype Apps but **are** operational on their browser-based applications while using Google Chrome™.

- macOS® Catalina, macOS® Mojave and macOS® High Sierra are **not** compatible with browser-based conferencing applications while using Apple Safari®.

- macOS® Catalina, macOS® Mojave and macOS® High Sierra are **not** compatible with FaceTime and Photo Booth®.

Compatible Cameras:

Note: Genuine Canon accessories are recommended — see chart on last page for more information.
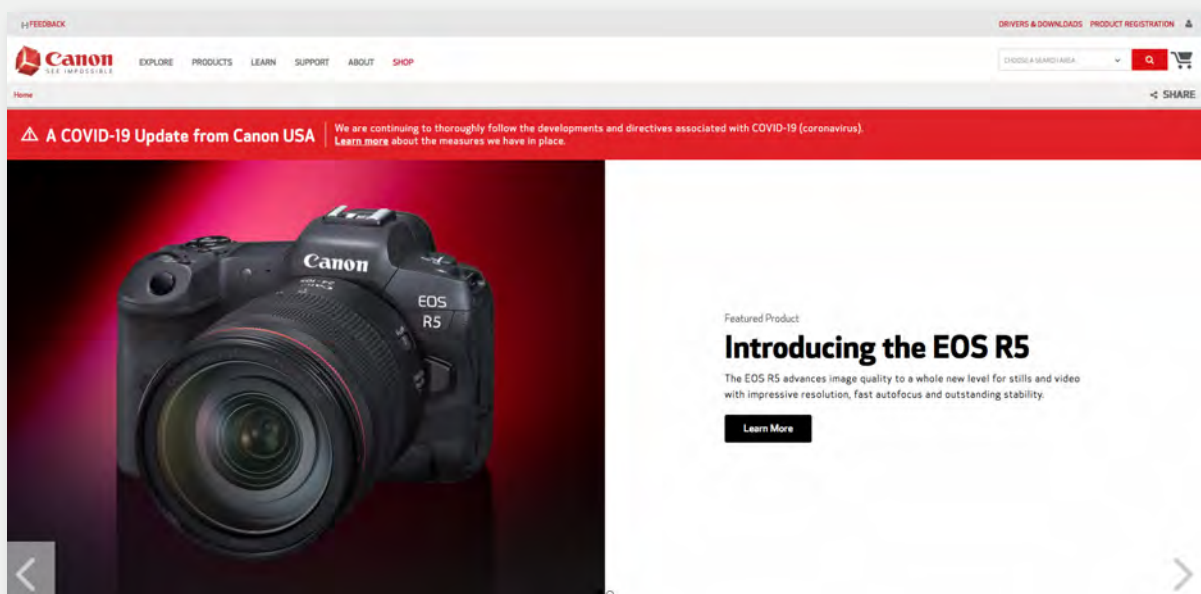
EOS Series		
EOS-1D X Mark III	EOS R	EOS Rebel T7i*
EOS-1D X Mark II	EOS 6D Mark II*	EOS Rebel T6i
EOS 5DS R	EOS RP*	EOS Rebel T7*
EOS 5DS	EOS 7D Mark II	EOS Rebel T6
EOS 5D Mark IV	EOS 90D*	EOS Rebel SL3*
	EOS 80D*	EOS Rebel SL2*
	EOS 77D*	EOS Rebel T100*
		EOS M6 Mark II*
		EOS M50*
		EOS M200*

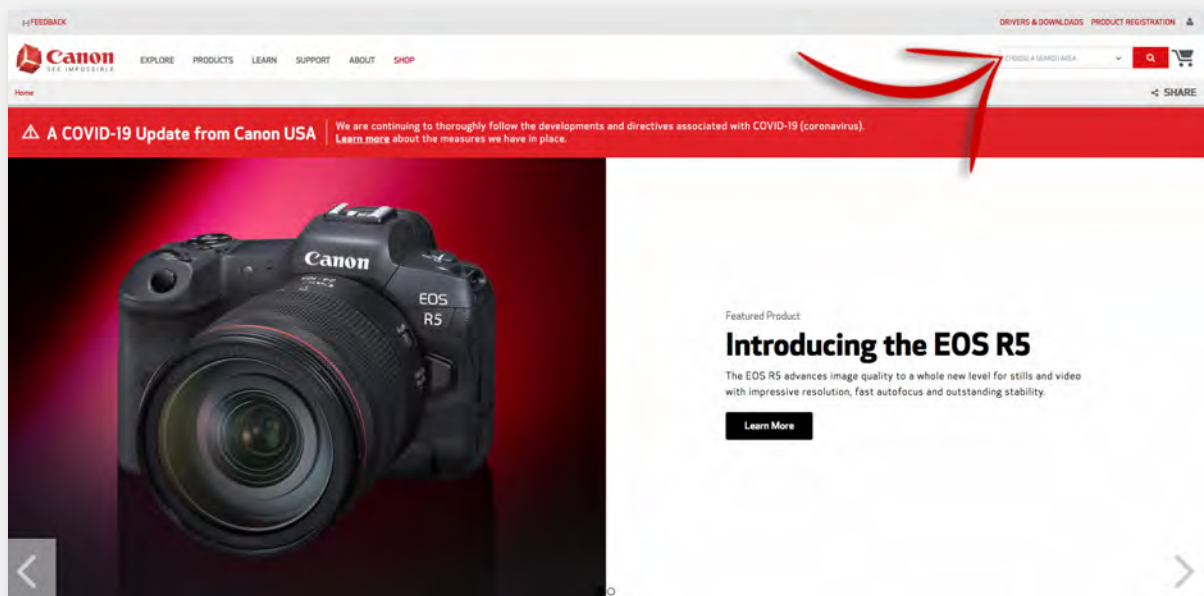| PowerShot Series		
PowerShot G5 X Mark II*	PowerShot G7 X Mark III*	PowerShot SX70 HS*

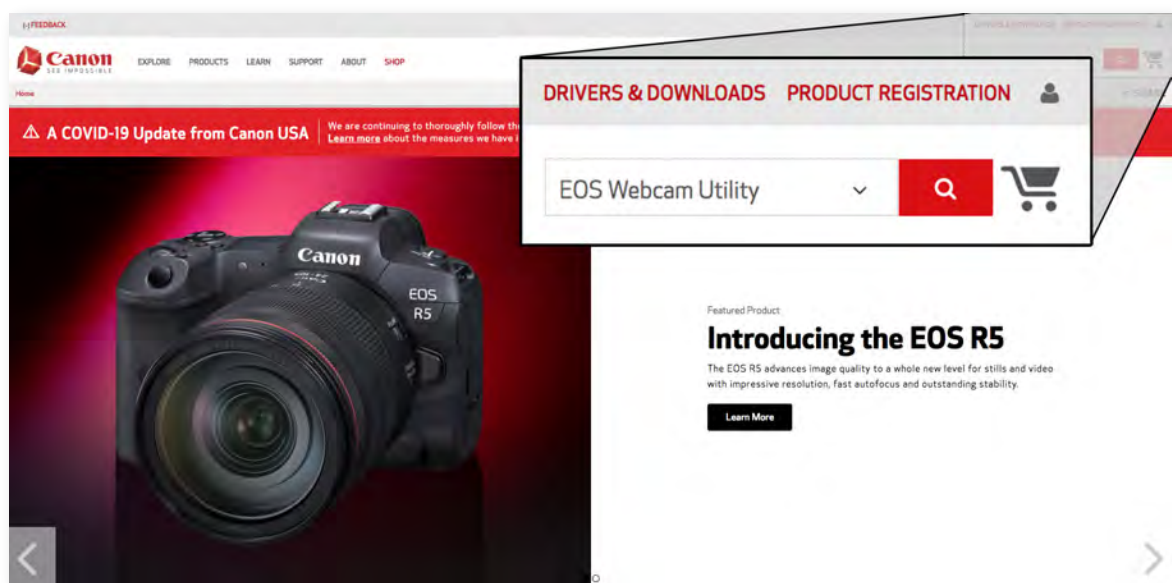*Camera does not ship with a bundled USB interface cable.

How to Download:

1. Open your web browser and either go directly to our EOS Webcam Utility Website OR follow the steps below to navigate through the Canon USA Website.

2. If navigating through the [Canon USA Website](#), at the top of the main page, find the "Search Area."
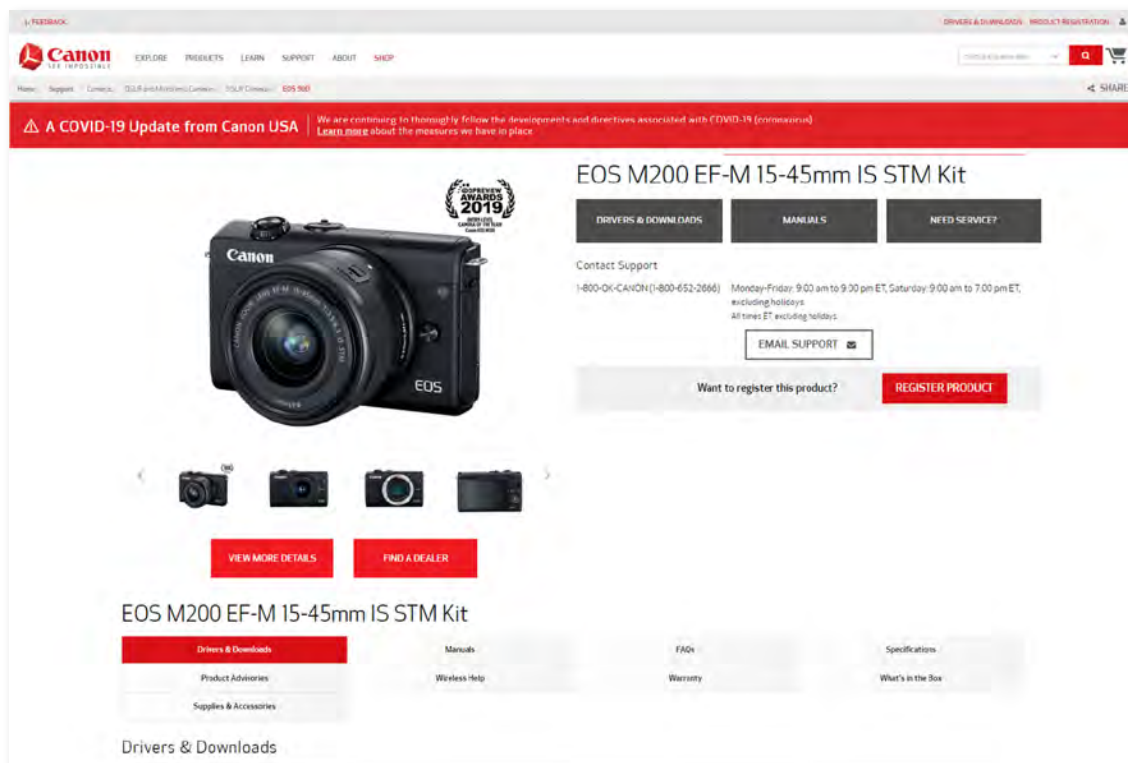

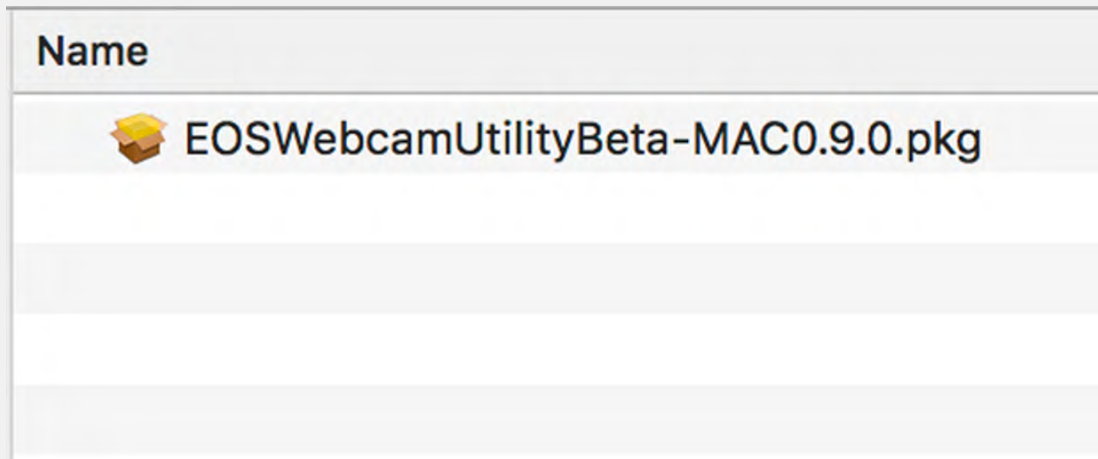**3.** Type "EOS Webcam Utility Beta" in the "Search Area" and hit enter.

4. Select your camera model from the list displayed. You will then be redirected to the download page.
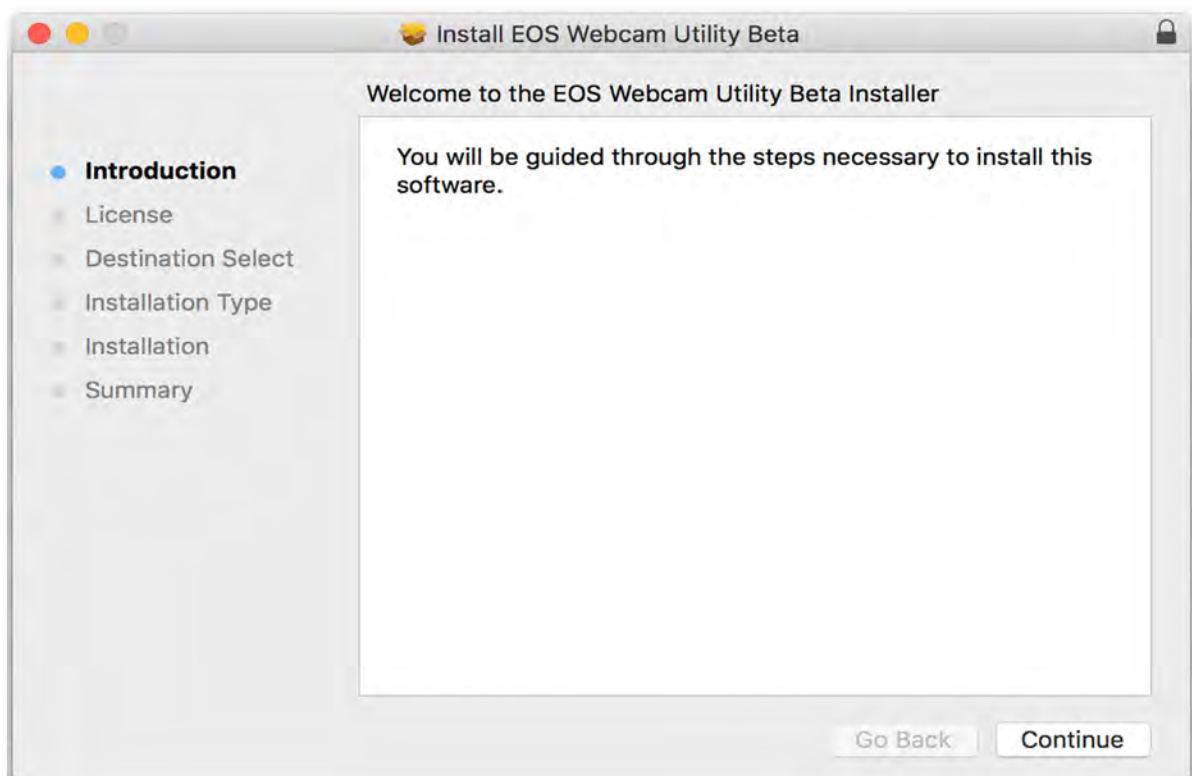

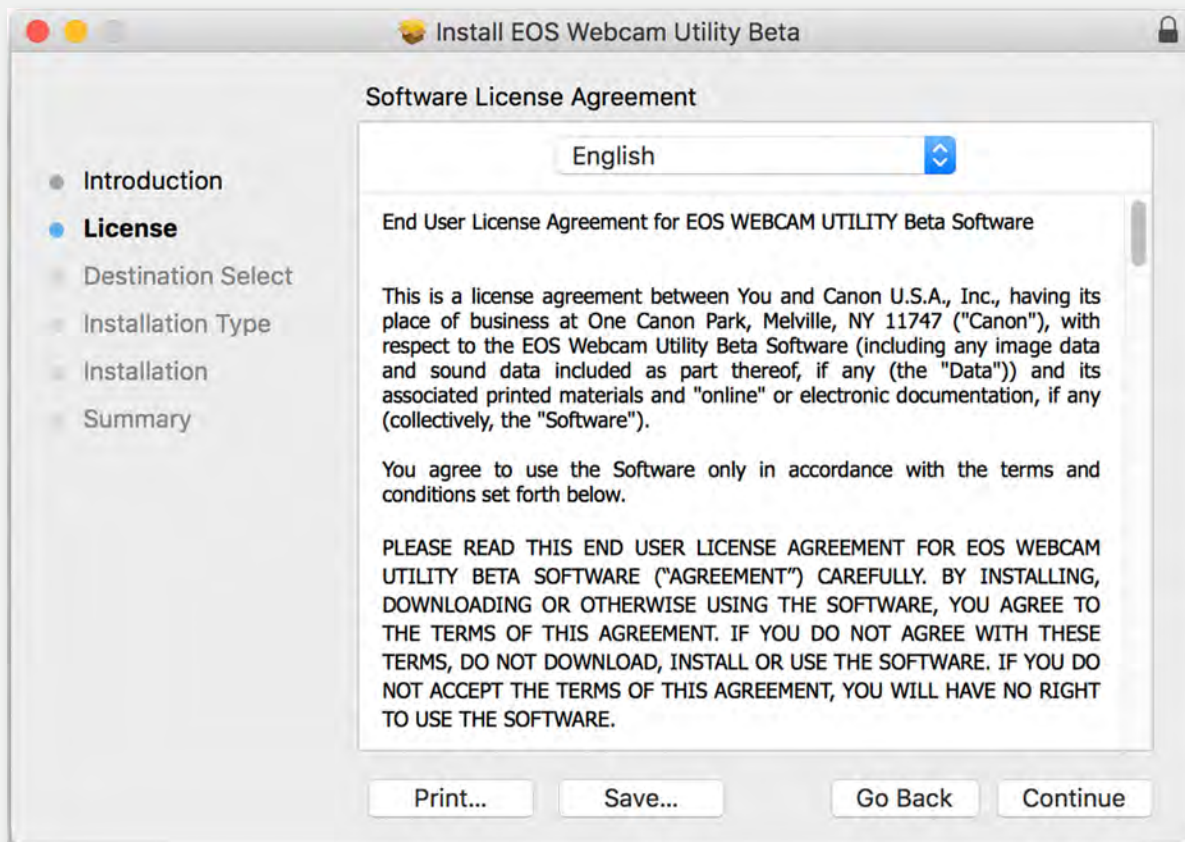**5.** Select and download "EOS Webcam Utility Beta."

6. Once the software download is complete, locate the "EOS Webcam Utility Beta Installation Package" in your computer's "Downloads" folder. The file will be called "EOSWebcamUtilityBeta-MAC.9.0.zip". Double-click the .zip file then double click the .pkg file to begin installation.

Name
🟫 EOSWebcamUtilityBeta-MAC0.9.0.pkg

7. Open the Installer Package file and click "Continue".

Install EOS Webcam Utility Beta

Welcome to the EOS Webcam Utility Beta Installer

- **Introduction**
- License
- Destination Select
- Installation Type
- Installation
- Summary

You will be guided through the steps necessary to install this software.
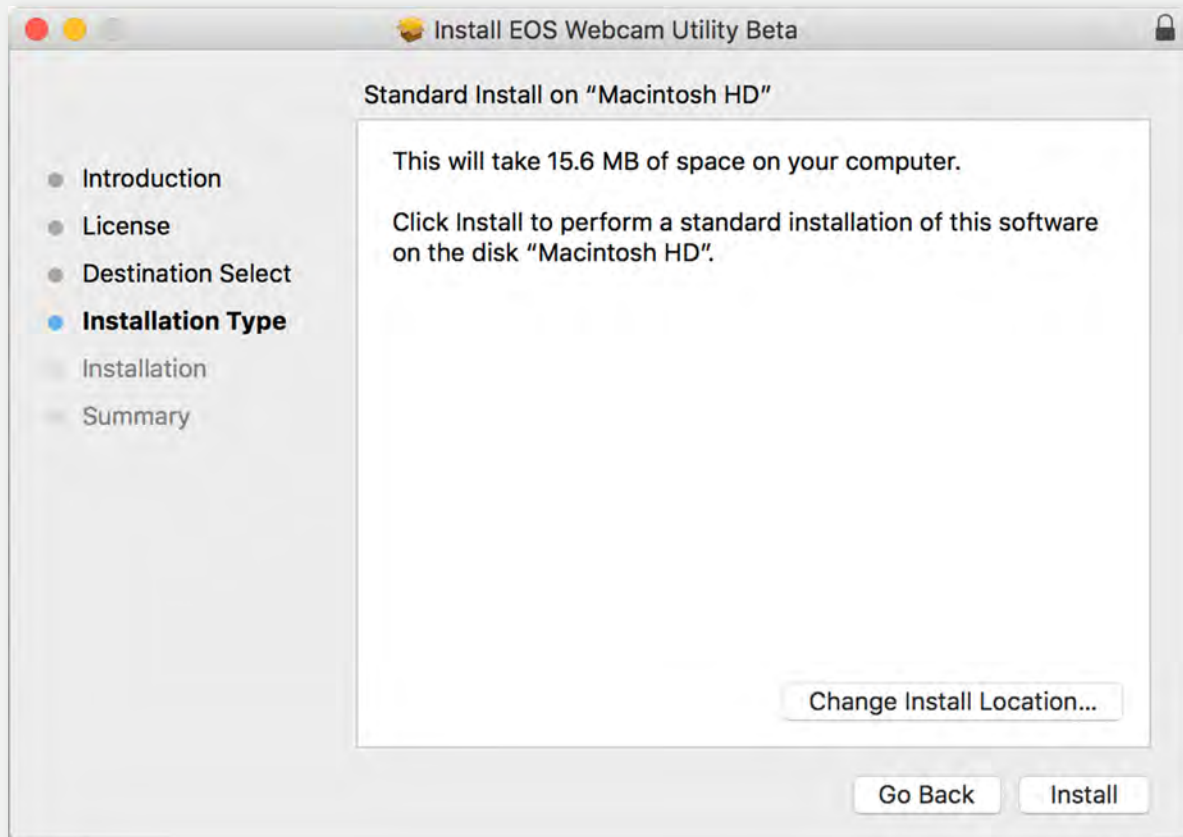
Go Back   Continue

8. Read through the License Agreement and if you agree, click "Continue." Then click "Agree".
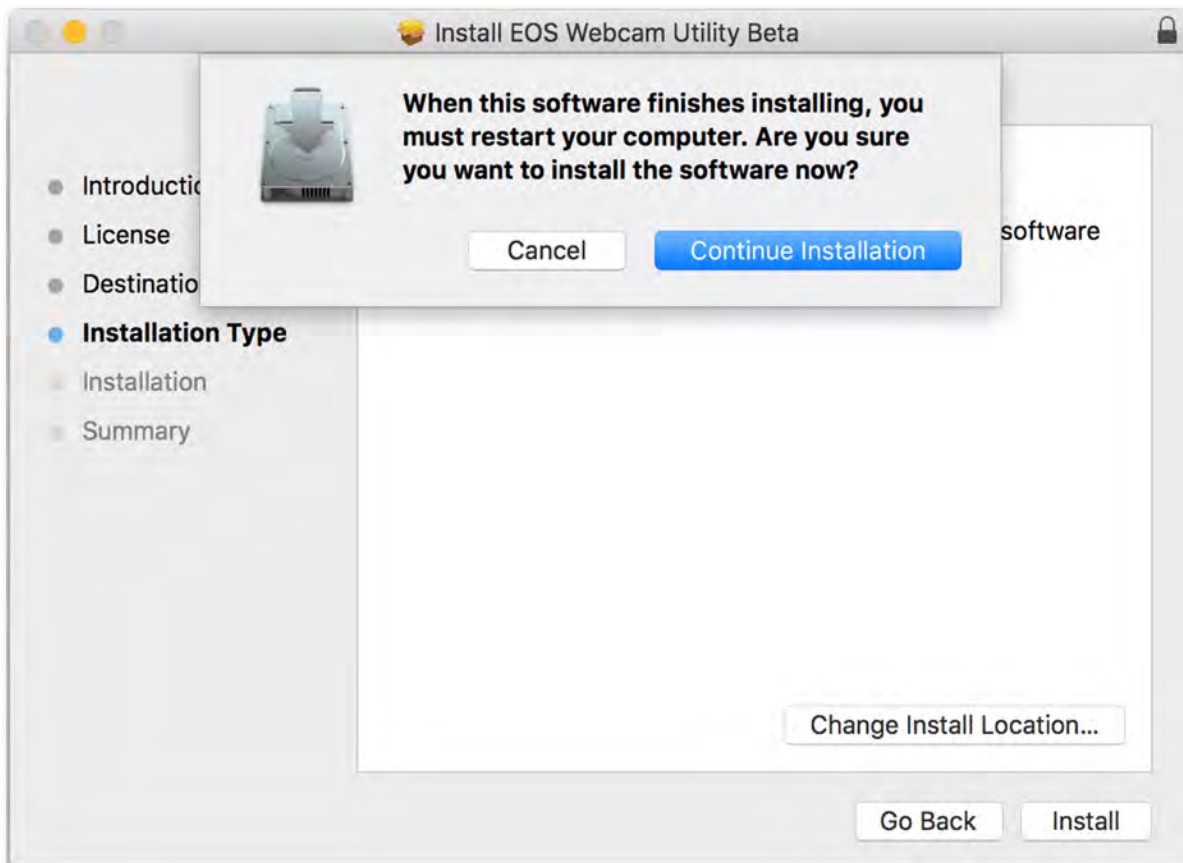

9. Select the drive to install the software and click "Continue" to proceed.
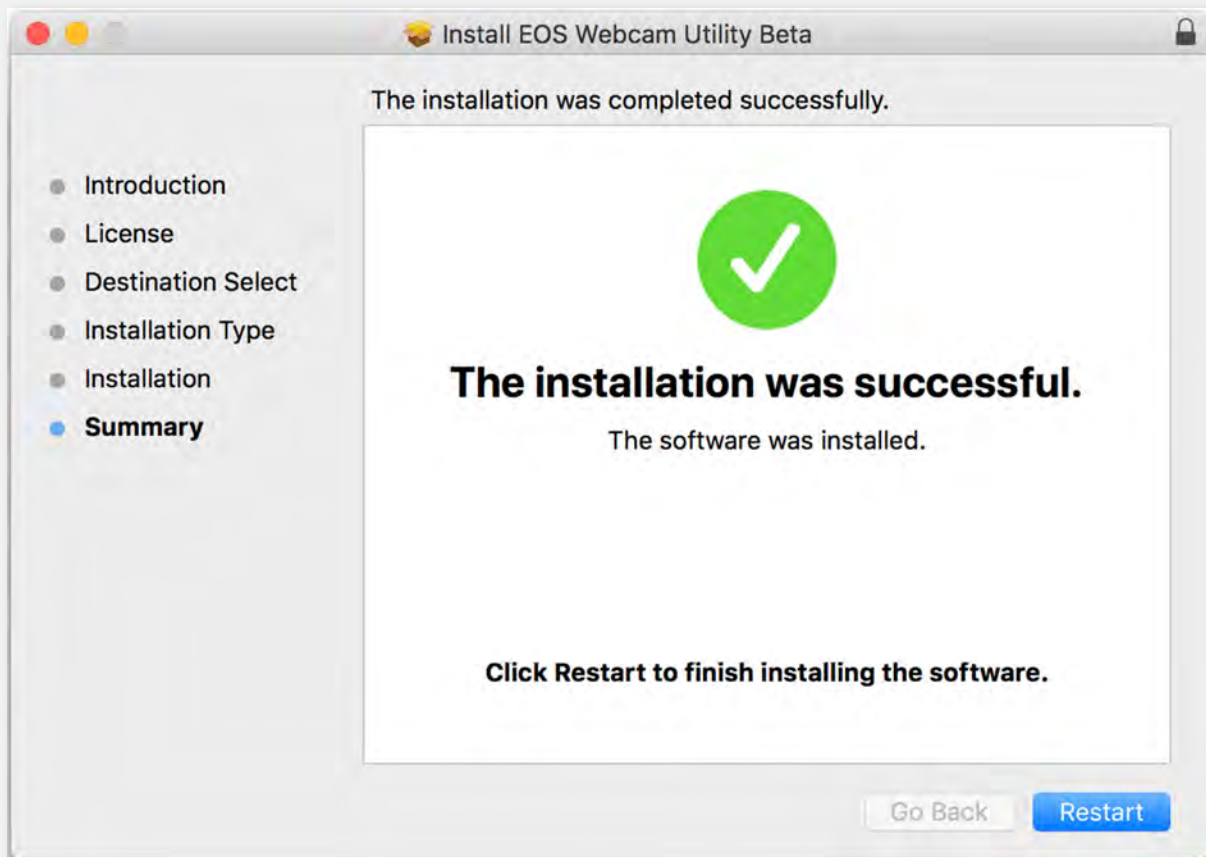
10. The installer will perform a standard installation. If you agree, click "Install".

11. You will be reminded to restart your computer after the instillation is complete. If you agree, click "Continue Installaton".
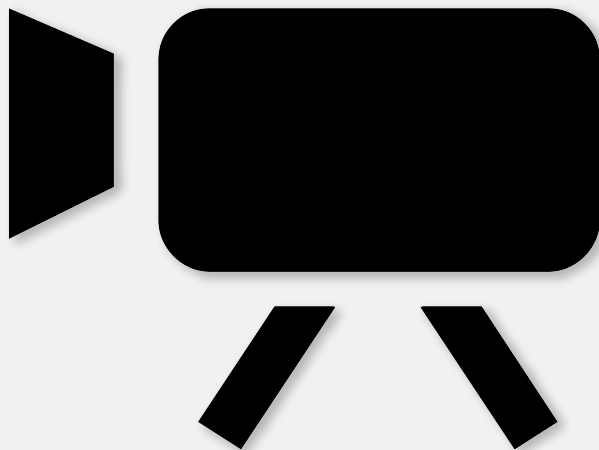
12. Once the software has successully installed, save any documents that you may be working on, close all applications that you have running and then click "Restart" to restart your computer.
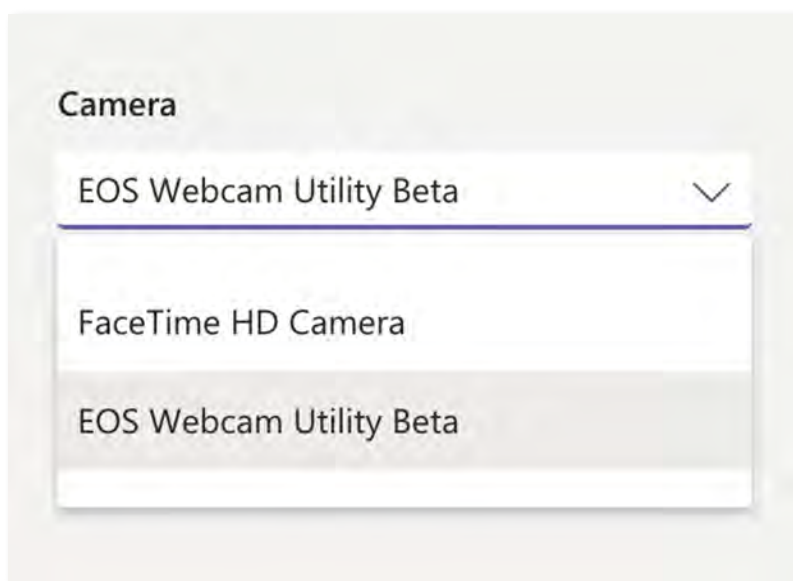

13. Once your computer has restarted, connect one end of the USB cable to your camera and then the other end to your computer.

14. Turn camera on. It is recommended to use Movie Mode. Set this with your camera's Mode Dial, Mode Switch or Mode Button interface. Note: If EOS Utility opens, quit the program completely.

15. Lastly, open your web conferencing app of choice. Find the "audio/video settings" menu and set "EOS Webcam Utility Beta" as the camera. Confirm that your built-in microphone is selected as your "microphone" Note: Audio is not transmitted from the camera.

16. Enjoy easy-to-use, high-quality video conferencing with EOS Webcam Utility Beta software functionality.

For troubleshooting and the latest information on support for EOS Webcam Utility Beta software, please visit the Canon Forum Support thread: Canon.us/forum-eoswebcamutilitymac.

Compatible Accessories:

Note: Genuine Canon accessories are recommended.

Camera Model	Suggested USB Interface Cable	Suggested Optional AC Adapter Accessories
EOS-1D X Mark III	IFC-100U (to USB C)	AC Adapter AC-E19 with DC Coupler DR-E19
EOS-1D X Mark II	IFC-150U II	AC Adapter AC-E19 with DC Coupler DR-E19
EOS 5DS R	IFC-150U II	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 5DS	IFC-150U II	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 5D Mark IV	IFC-150U II	AC Adapter AC-E6N with DC Coupler DR-E6
EOS R	IFC-100U (to USB C)	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 6D Mark II	IFC-400PCU*	AC Adapter AC-E6N with DC Coupler DR-E6
EOS RP	IFC-100U (to USB C)*	AC Adapter AC-E6N with DC Coupler DR-E18
EOS 7D Mark II	IFC-150U II	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 90D	IFC-600PCU*	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 80D	IFC-400PCU*	AC Adapter AC-E6N with DC Coupler DR-E6
EOS 77D	IFC-400PCU*	AC Adapter AC-E6N with DC Coupler DR-E18
EOS Rebel T7i	IFC-400PCU*	AC Adapter AC-E6N with DC Coupler DR-E18
EOS Rebel T6i	IFC-130U	AC Adapter AC-E6N with DC Coupler DR-E18
EOS Rebel T7	IFC-400PCU*	Compact Power Adapter CA-PS700 with DC Coupler DR-E10
EOS Rebel T6	IFC-130U	Compact Power Adapter CA-PS700 with DC Coupler DR-E10
EOS Rebel SL3	IFC-600PCU*	AC Adapter AC-E6N with DC Coupler DR-E18
EOS Rebel SL2	IFC-400PCU*	AC Adapter AC-E6N with DC Coupler DR-E18
EOS M6 Mark II	IFC-100U (to USB C)*	Compact Power Adapter CA-PS700 with DC Coupler DR-E17
EOS M50	IFC-600PCU*	Compact Power Adapter CA-PS700 with DC Coupler DR-E12
EOS M200	IFC-600PCU*	Compact Power Adapter CA-PS700 with DC Coupler DR-E12
EOS Rebel T100	IFC-400PCU*	N/A
PowerShot G5 X Mark II	IFC-100U (to USB C)*	N/A (Note: USB Power Adapter PD-E1 cannot be used at the same time as USB Interface Cable)
PowerShot G7 X Mark III	IFC-100U (to USB C)*	N/A (Note: USB Power Adapter PD-E1 cannot be used at the same time as USB Interface Cable)
PowerShot SX70 HS	IFC-600PCU*	N/A

*Camera does not ship with a USB interface cable.

Canon