



# Toolless Roto Seal®



The Toolless Roto Seal is a durable plastic and wire seal that can be applied without a tool.

## APPLICATIONS

- Meters
- Gasoline Pumps
- Fiber Drums
- Imported Carpets
- Scales
- Totes

## FEATURES

- Two component acrylic seal.
- Wire rotates around insert.
- Attached stainless steel wire up to 18" (304.8mm) long.
- Spools or precut lengths of wire or Kevlar non-conductive wire also available.
- Optional barcode is available.

## MATERIAL

Acrylic  
 1 x 7 x .009 soft stainless steel wire (.027 OD)

## MARKING/PRINTING

- Standard decoration: heat stamped, consecutive number (7 digits) and company name/logo; last three digits of serial number laser etched on insert as an option.
- Special decoration: laser etched bar code with human readable numbers
- Barcode Parameters: Code 128 – 7 alphanumeric characters, Interleaved 2 of 5 – 8 numeric (must be even number of characters) or Code 39 – 5 alphanumeric characters



Seals shown not actual size.

# Toolless Roto Seal®



## STANDARD COLORS

Body: Clear

Insert: Red / Dark Blue / Green / Yellow / Orange / White / Black



## PACKAGING

### Without Wires

Standard Packaging: 100/Bag; 5,000/Carton

Carton Dimensions: 28" x 15" x 9" (70cm x 37.5cm x 23cm)

Carton Weight: Gross: 34 lbs (15 kg)

### With Attached 8" Wires

Standard Packaging: 100/Bag; 500/Box; 2,500/Carton



Carton Dimensions: 28" x 15" x 9" (70cm x 37.5cm x 23cm)

Carton Weight: Gross: 22 lbs (10 kg)

## PATENT NUMBERS

US 5,419,599; 6,000,736; 6,007,121; 6,390,519 B1

Taiwan NI144464; 128172

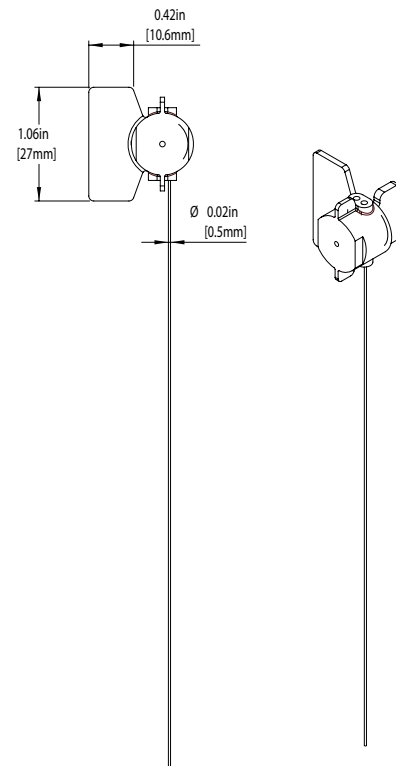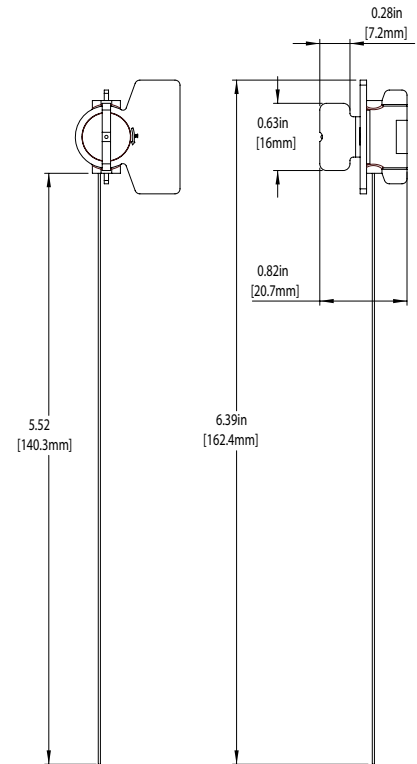

Toolless Roto Seal\_11V2



227 N. Route 303, Suite 101, Congers, NY 10920 • 800.344.4772 • 800.348.4777

www.tydenbrooks.com • info@tydenbrooks.com

