



Board-Con Female Connector 90°, 2.54 x 2.54mm, 6 - 120 Position, 3 rows, 1 housing, housing height 7.50mm


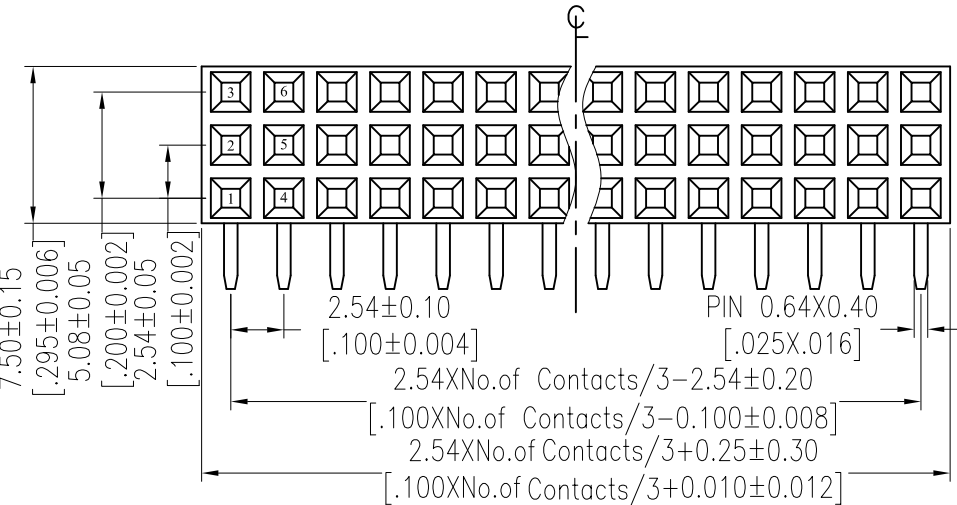


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

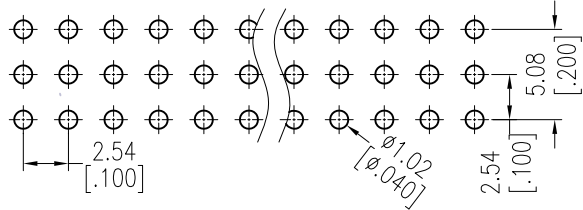

NOTES:
Current Rating: 3,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C
Contact Material: Copper Alloy

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

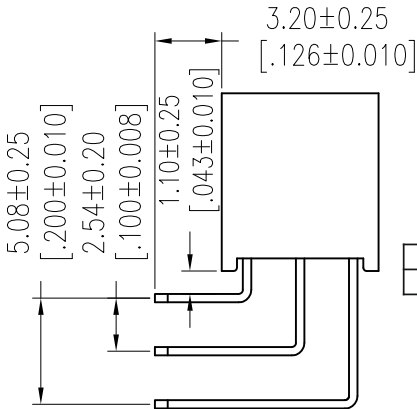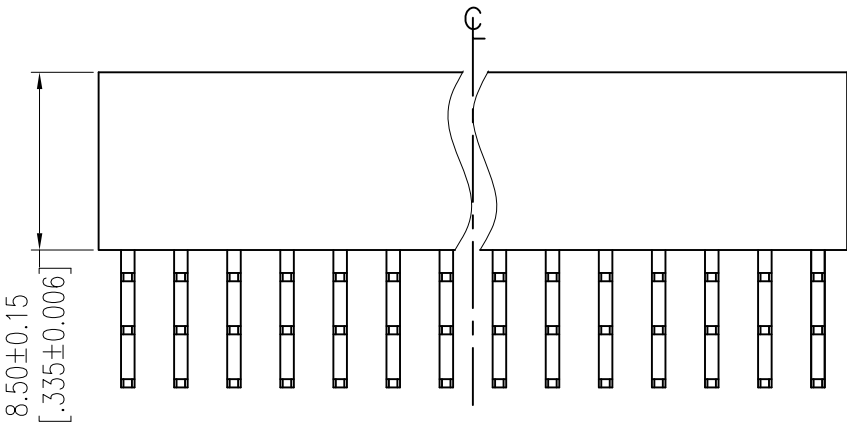

B0035-XXXXX

# of Contacts	Type	Plating	Material	Packaging
06 - 120		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	Tray Tube

1	15.05.2021	issued	NIL
REV	DATE	NOTE	NAME