

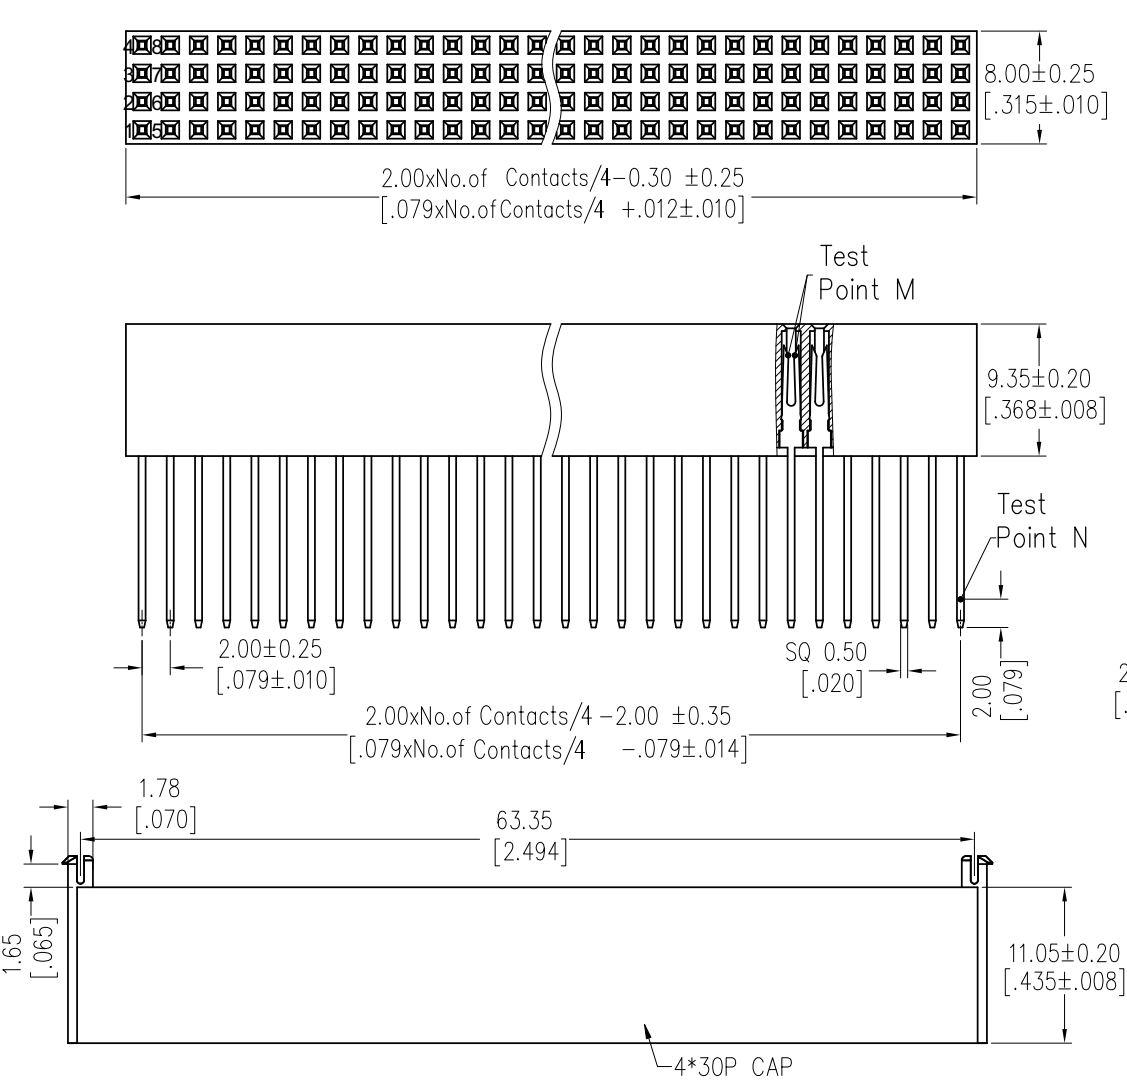



Board-Con Female Connector 180°, 2.00 x 2.00mm, 8 - 160 Position, 4 rows, 1 housing, housing height 9.30mm, DIP=12.15+CAP

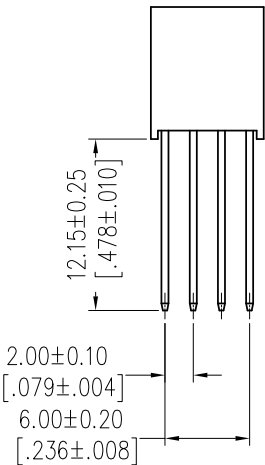

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

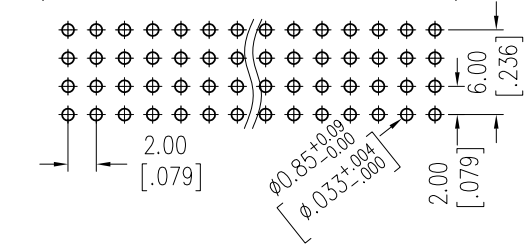

NOTES:
Current Rating: 1,5 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy
Plating Testpoint M = Mating
Plating Testpoint N = Tail

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

B0132-XXXXX

# of Contacts	Type	Plating	Material	Packaging
8 - 160		3μ"Gold 10μ"Gold 15μ"Gold Mating 10μ"Gold Tail 3μ" Gold Mating 15μ" Gold Tail 3μ" Gold	PA9T	Tube

1	29.05.2021	issued	NIL
REV	DATE	NOTE	NAME