

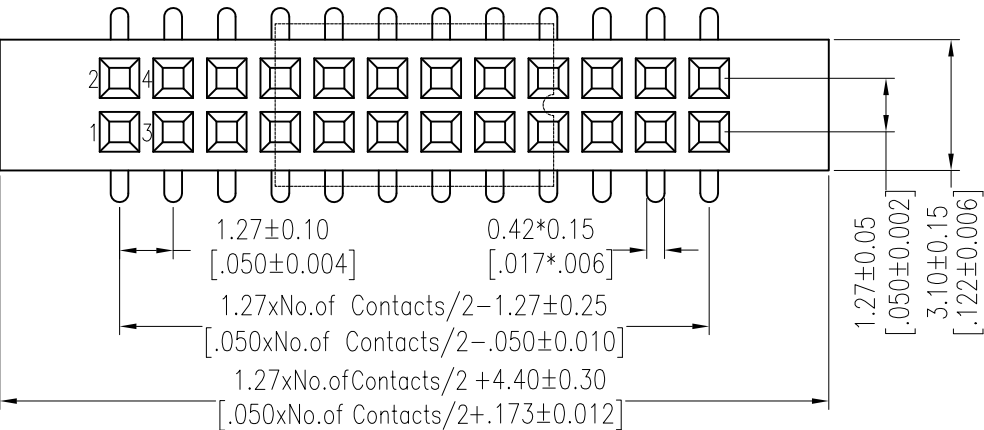



Board-Con Female Connector SMT 180°, 1.27 x 1.27mm, 4 - 100 Position, 2 rows, 1 housing, housing height 3.40mm, Extended Housing

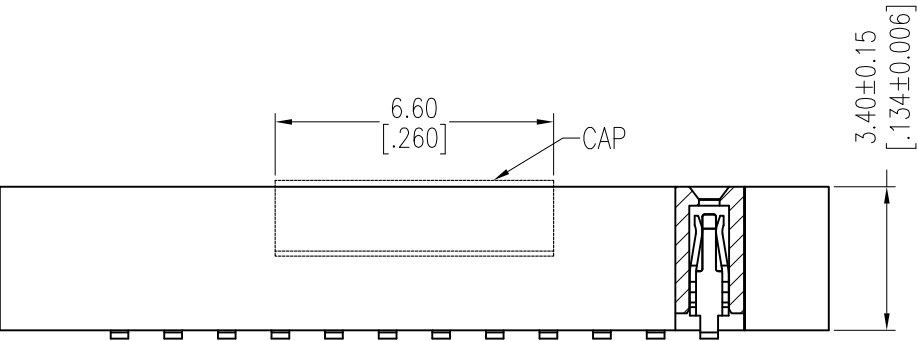

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

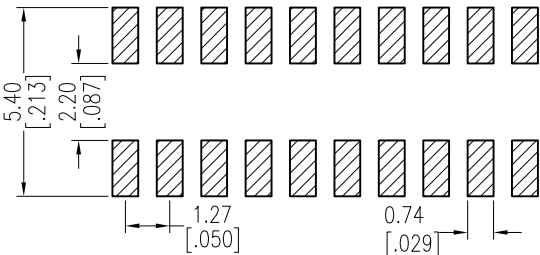

NOTES:
Current Rating: 1,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

B0174-XXXXX

# of Contacts	Type	Plating	Material	Packaging
4 – 100		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold	PA9T	Tube+CAP Tube T&R+CAP

1	03.06..2021	issued	NIL
REV	DATE	NOTE	NAME