



Board-Con Female Connector SMT 180°, 2.54 x 2.54mm, 4 - 80 Position,
2 rows, 1 housing, housing height 11.00mm

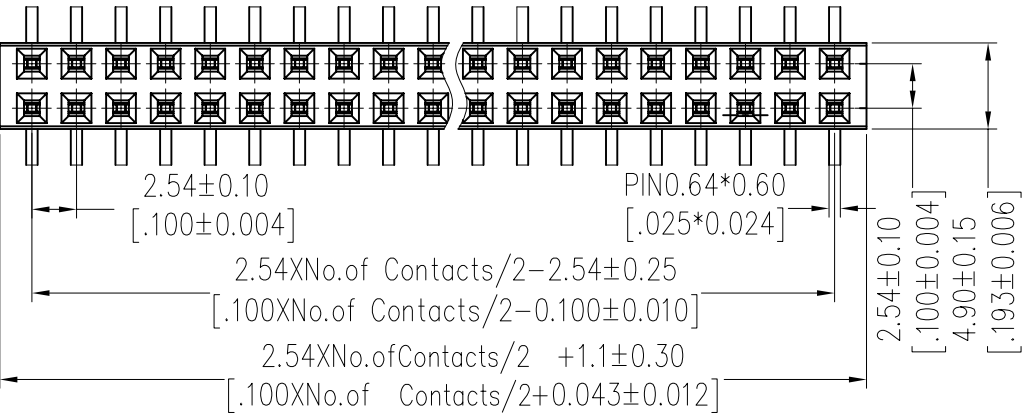



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

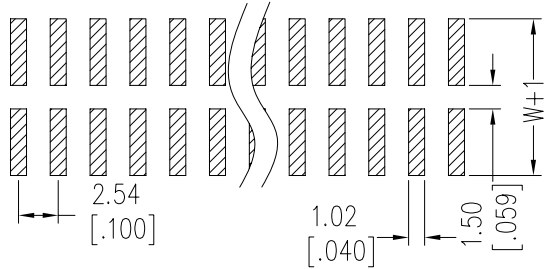

NOTES:
Current Rating: 3,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

OPERATION	
X.X	± 0.40
X.XX	± 0.25
X.XXX	± 0.15
Angle	$\pm 3^\circ$
DIM	TOL

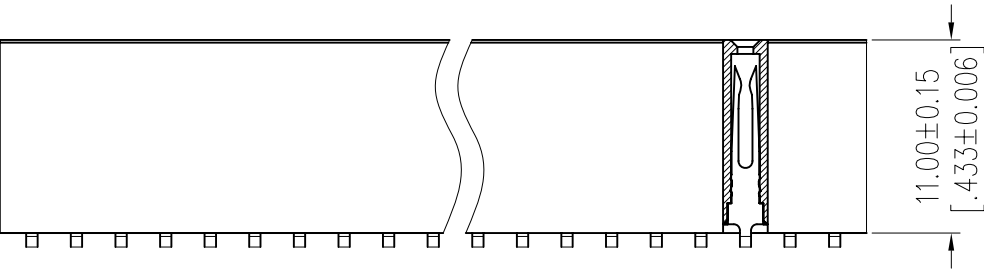

B0222-XXXXX

# of Contacts	Type	Plating	Material	Packaging
4 - 80		Gold Flash 10μ" Gold 15μ" Gold 30μ" Gold Gold Flash/Tin 10μ" Gold/Tin 15μ" Gold/Tin 30μ" Gold/Tin Tin Matte Tin	PA9T	Tube

Dimensions	
Standard	Customized
W: 9,00mm	
H: 11,80mm	

1	07.06.2021	issued	NIL
REV	DATE	NOTE	NAME