


Board-Con Male Connector 90°, 2.00mm, 2 - 40 Position, 1 rows, 1 housing, housing height 2.00mm






NOTES:
Current Rating: 2,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

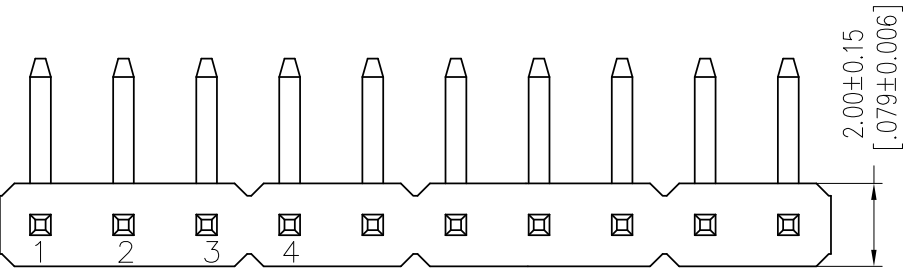

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

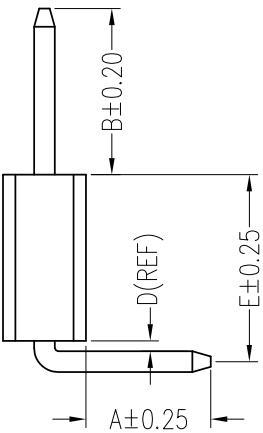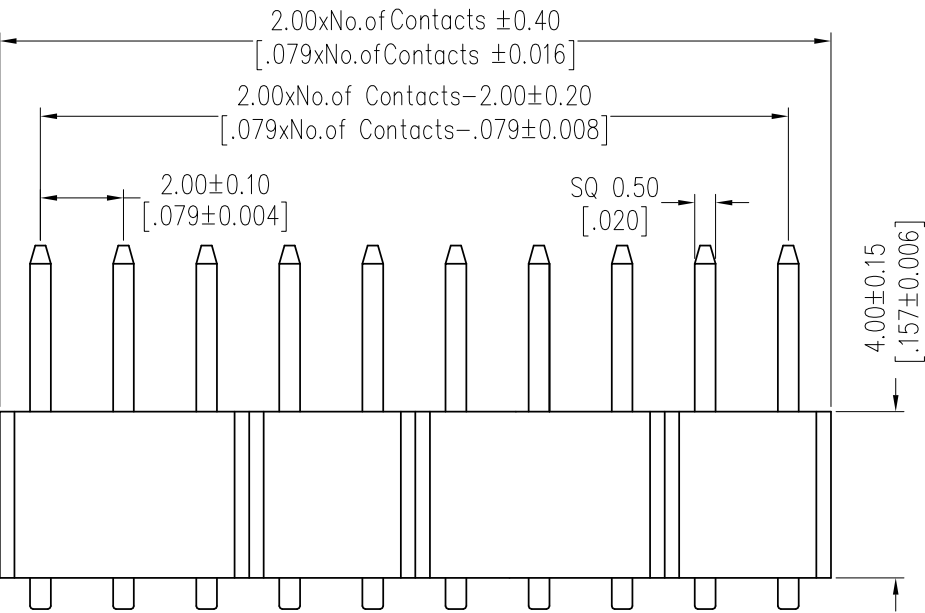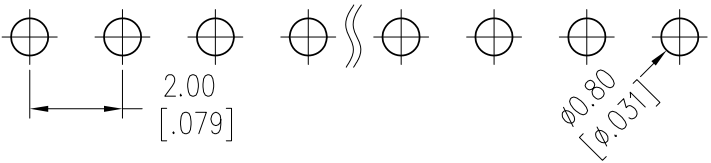

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

# of Contacts	Type	Plating	Material	Packaging
2 - 40		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	PE Bag Tube
Dimensions				
	Standard	Customized		
A:	3,00mm			
E:	4,50mm			
B:	4,00mm			

1	10.06.2021	issued	NIL
REV	DATE	NOTE	NAME