


Board-Con Male Connector 90°, 1.27 x 1.27mm, 2 - 100 Position, 2 rows, 2 housings, housing height 5.34mm, Housing thickness 1.50mm, Housings on both sides






NOTES:
Current Rating: 1,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

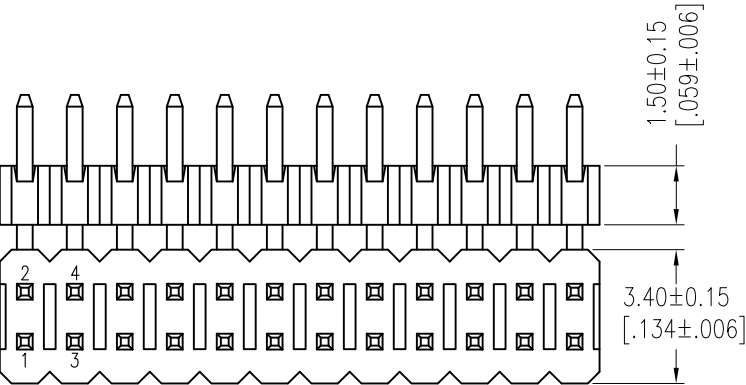

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

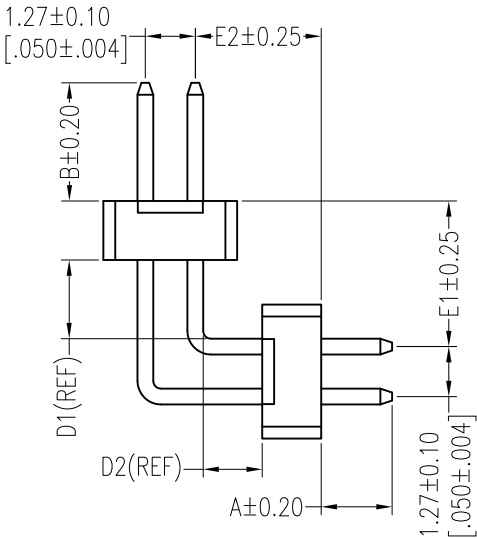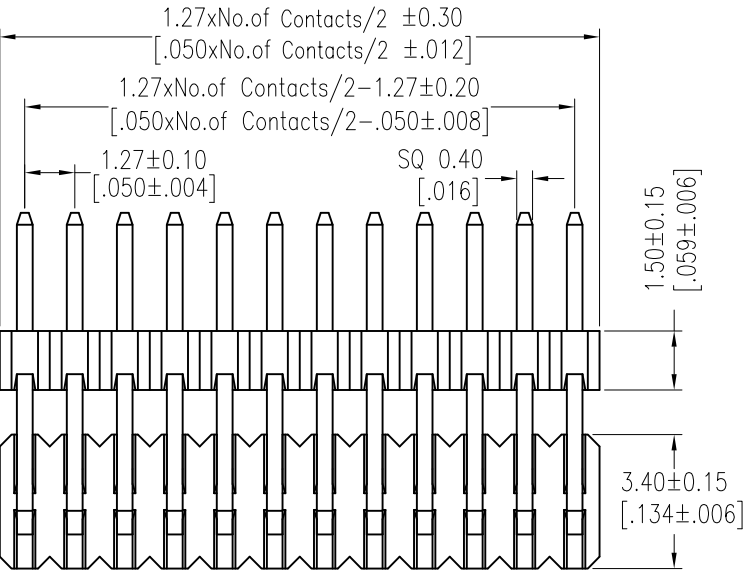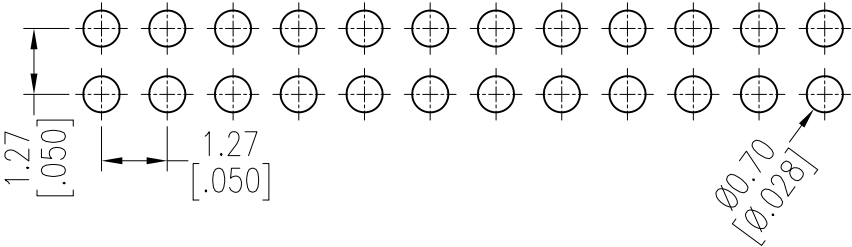

# of Contacts	Type	Plating	Material	Packaging
2 - 100		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	Tray

Dimensions		
	Standard	Customized
A:	1,80mm	
E1:	3,00mm	
B:	4,00mm	
E2:	3,00mm	

B0286-XXXXX

1	14.06.2021	issued	NIL
REV	DATE	NOTE	NAME