


Board-Con Male Connector SMT 90°, 2.00 x 2.00mm, 4 - 80 Position, 2 rows, 1 housing, housing height 4.00mm, with Post




NOTES:
Current Rating: 2,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C



Contact Material: Copper Alloy

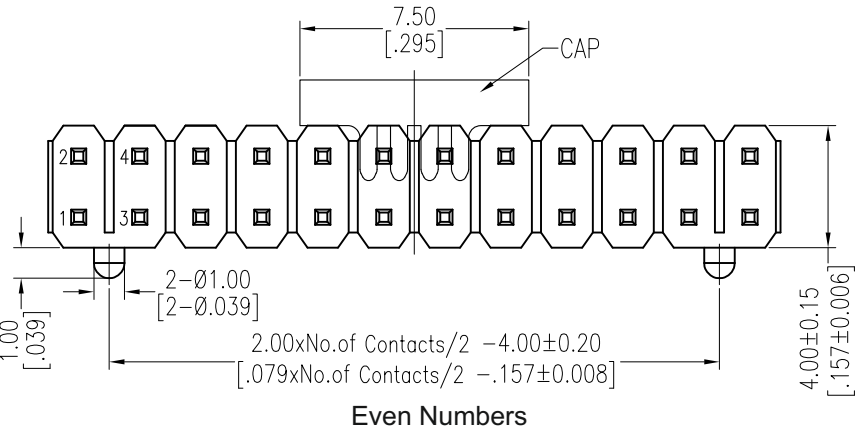


Even Numbers

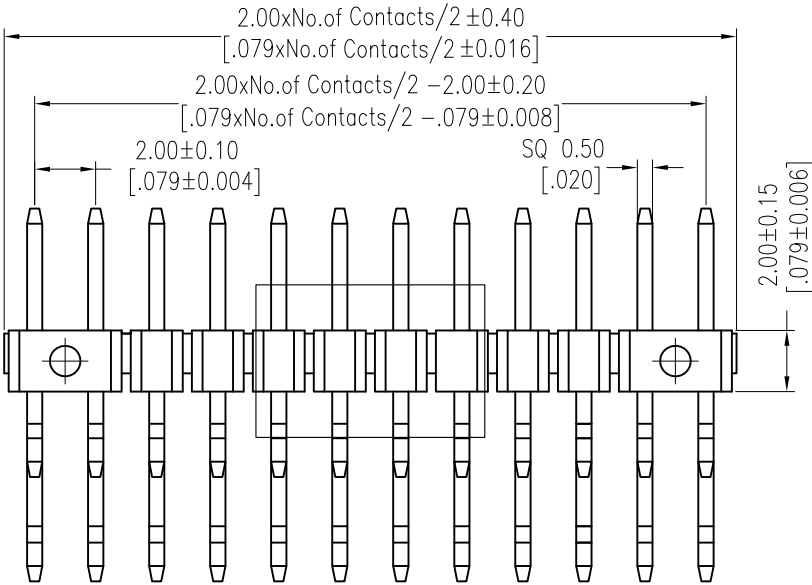

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

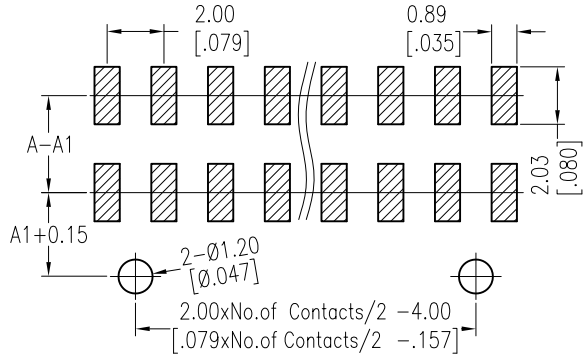

Odd Number

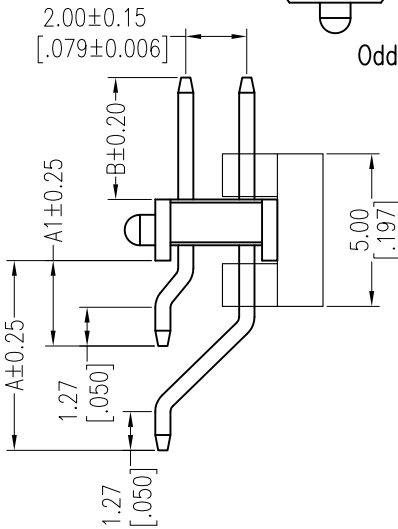

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

B0355-XXXXX

# of Contacts	Type	Plating	Material	Packaging
4 - 80		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	Tube T&R+CAP Tube+CAP

Dimensions	
Standard	Customized
A1: 2,80mm	
A: 6,22mm	
B: 4,00mm	

1	24.06.2021	issued	NIL
REV	DATE	NOTE	NAME