

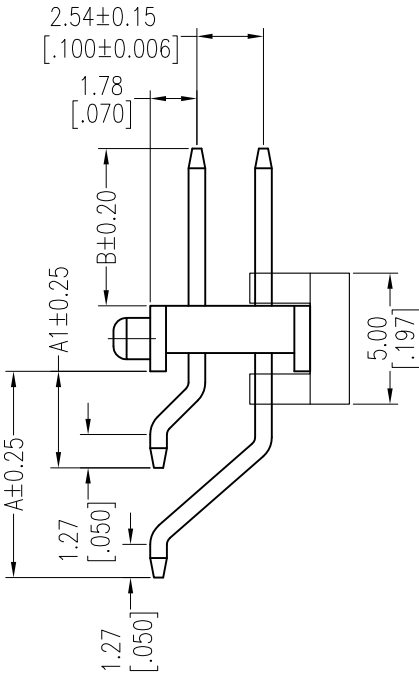
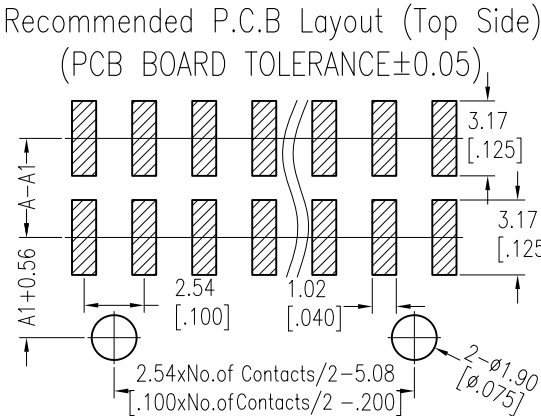
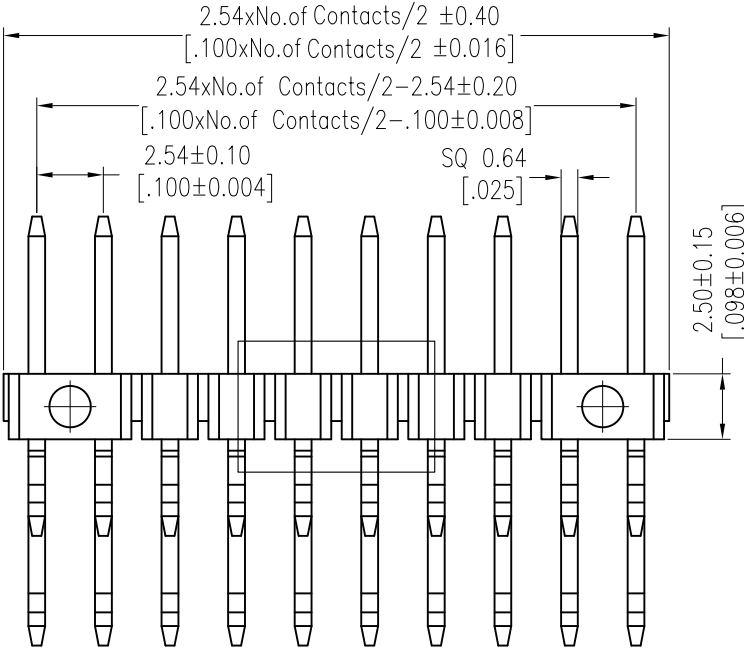


Board-Con Male Connector SMT 90°, 2.54 x 2.54mm, 4 - 80 Position, 2 rows, 1 housing, housing height 6.10mm, with Post; Housing width: 6.1

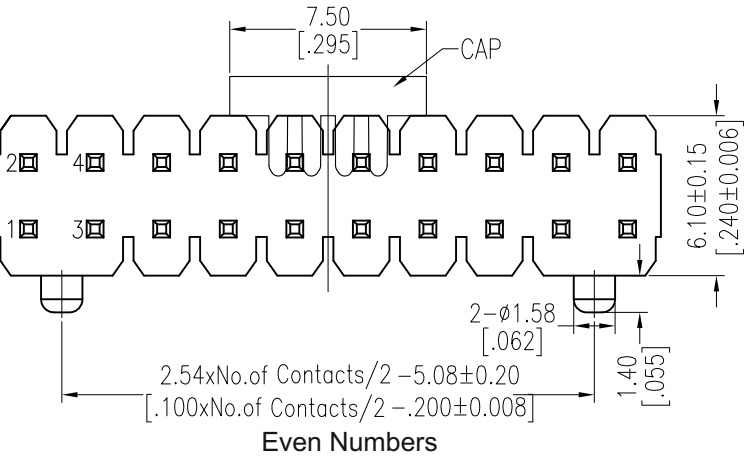

NOTES:
Current Rating: 3,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C
Contact Material: Copper Alloy

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

# of Contacts	Type	Plating	Material	Packaging
4 - 80		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	Tube T&R+CAP Tray Tube+CAP

Dimensions		
	Standard	Customized
A1:	3,68mm	
A:	7,87mm	
B:	6,00mm	

REV	DATE	NOTE	NAME
1	24.06.2021	issued	NIL