

Board-Con Male Connector 180°, 1.00mm, 1 - 50 Position, 1 row, 2 housings, housing height 1.00mm




Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)




NOTES:
Current Rating: 0,75 Amp
Contact Resistance: 30mΩ max.
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy

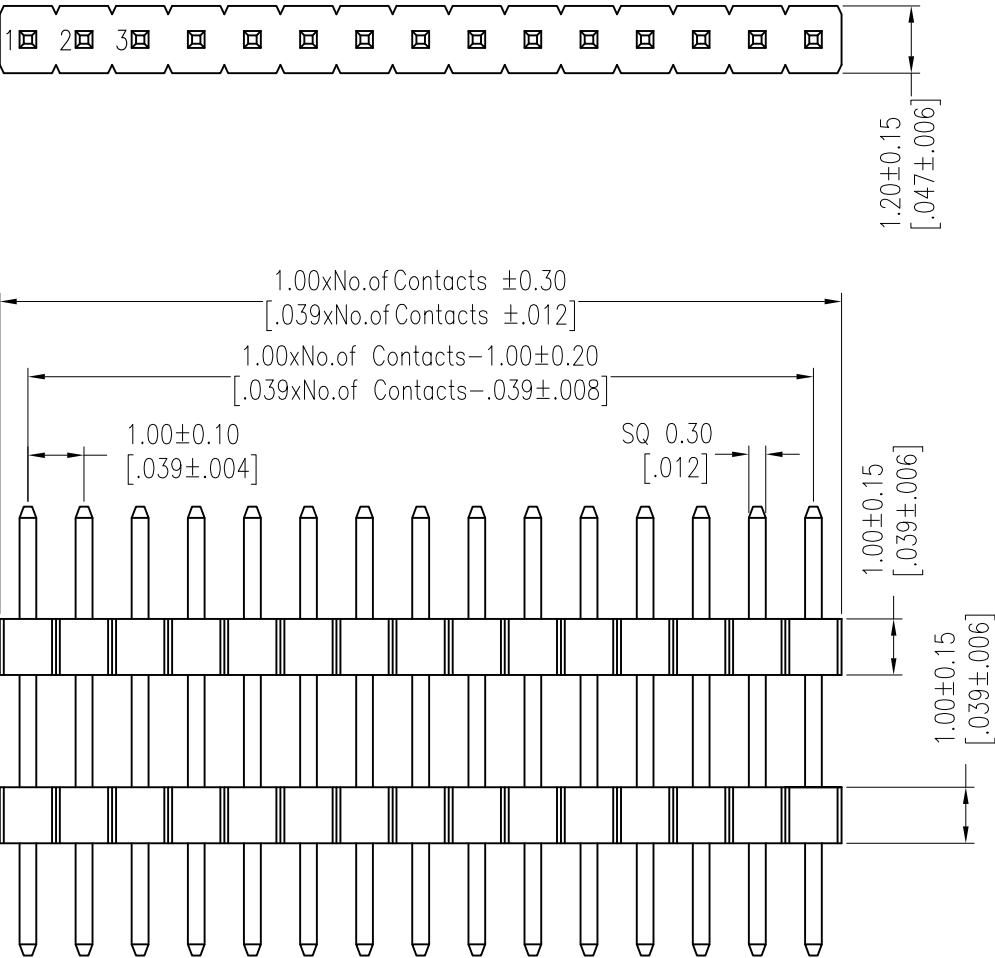

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

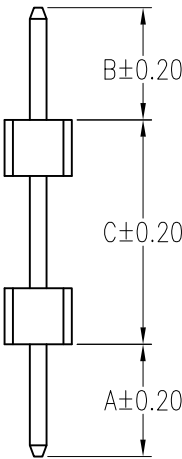

# of Contacts	Type	Plating	Material	Packaging
1-50		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Tin Matte Tin	PA9T	Tray

Dimensions		
	Standard	Customized
A:	2,00mm	
B:	2,00mm	
C:	5,00mm	

B0361-XXXXX

1	25.06.2021	issued	NIL
REV	DATE	NOTE	NAME