


Board-Con Male Connector 180°, 2.54 x 2.54mm, 4 - 80 Position, 2 rows, 1 housing, housing height 2.80mm




NOTES:
Current Rating: 3,00 Amp
Contact Resistance: 20mΩ max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min.
Operation Temperature: -40°C to +105°C



Contact Material: Copper Alloy

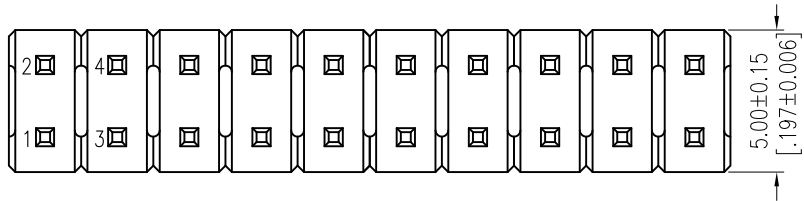

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

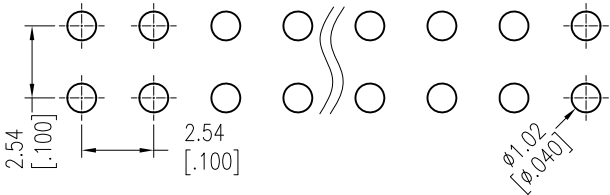

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

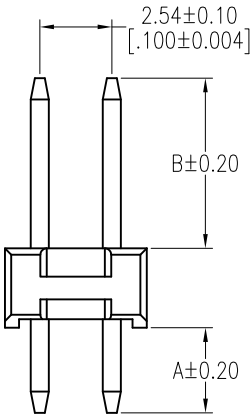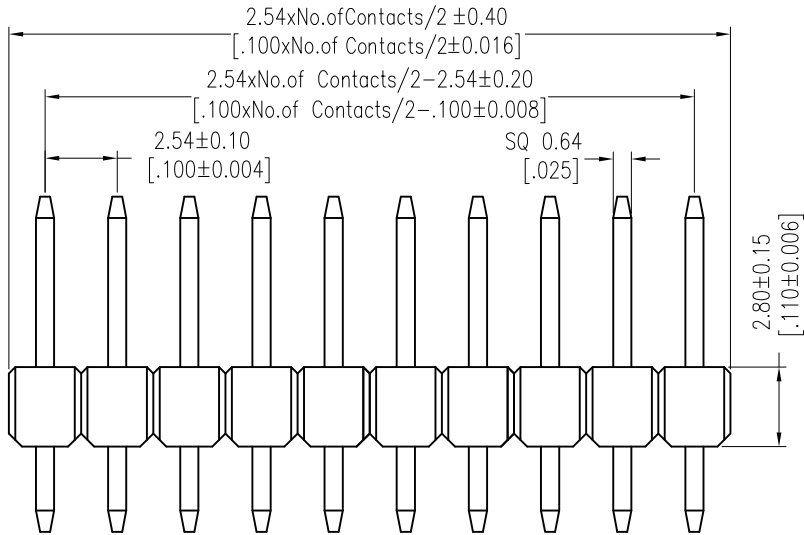

B0423-XXXXX

# of Contacts	Type	Plating	Material	Packaging
4 – 80		Gold Flash 10µ" Gold 15µ" Gold 30µ" Gold Gold Flash/Tin 10µ" Gold/Tin 15µ" Gold/Tin 30µ" Gold/Tin Tin Matte Tin	PA9T	PE Bag Tube

Dimensions	
	Standard Customized
A:	3,00mm
B:	6,00mm

1	31.05.2021	issued	MCS
REV	DATE	NOTE	NAME