

Canvas

Porcelain Tile | Polished



Canvas

Porcelain Tile | Polished


Beige



Gray



Oxford

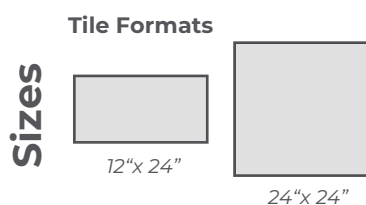

Packaging

Dimensions	Thickness	Sq. Ft / Carton	Pcs. / Carton	Mosaic	Bullnose
11.8"x23.62" 299.8x600.1mm	8.5 +/- 5mm	17.44	9	No	No
23.62"x23.62" 600.01x600.1mm	8.5 +/- 5mm	17.44	9	No	No

Shade Variation



Moderate Variation

Light to moderate shade and texture variation within each carton.



TECHNICAL FEATURES

Dimensions | Surface flatness

Warpage diagonal	mm	670.6 ± 0.15%	ASTM C485
Warpage edge	mm	599.8 ± 0.5%	ASTM C485

Physical properties

Water absorption	%	≤ 5	ASTM C373
Breaking strength	lbf	≥ 250	ASTM C648
Visible abrasion resistance	-	PEI (IV)	ASTM C1027
Thermal shock resistance	-	Resist	ASTM C484
Crazing resistance	-	Resist	ASTM C424
Resistance to freeze	-	Resist	ASTM C1026
Dynamic coefficient of friction (DCOF)	-	≥ 0.42	ANSI A326.3

Chemical properties

Chemical resistance	-	Class A Resist ¹	ASTM C650
Stain resistance	-	Class A	ASTM C1378

¹Avoid contact of the ceramic material with chemicals such as Muriatic Acid, Hydrofluoric Acid, Chlorine, Gasoline, Thinner, Diesel, cleaners that contain Potassium Hydroxide and other similar products, since the use of such substances can cause severe changes in the tile surface, altering its original appearance.

Lamosa USA Showroom
East Beltwood Parkway
Dallas, Tx. United States
75244



www.lamosausa.com



@lamosausa



@lamosausa



Lamosa USA



/lamosausa