


REZIRACK 2.0

Residential Roof Mounting System

TECHNICAL

SPECIFICATIONS

Distribution Load	1.5 - 3 lbs/ft ²
Inclinations	Flush
Wind Speed	Up to 190mph
Material	6000 series aluminum
Module Type	All standard size framed PV modules
Wire Management	Built into KB10 Rail
Orientation	Landscape, Portrait
Rail Length	10', 20'
Configurations	Shared-Rail, Fully-Railed
Roof Pitch	0° - 45°
Roof Type	All asphalt shingle roofs
Grounding Method	ETL certified KB Konnect clamps
Module Spacing	Customizable based on project requirements
Roof Clearance	Up to 8" (Bottom of module to roof)
Span Lengths	Dependent on project location, 3' - 8'

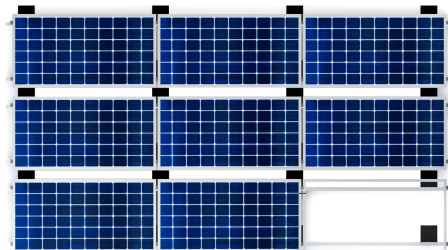

Fully-Railed
Two Rails per row of modules

Shared-Rail
Rails shared between modules

MADE IN AMERICA



MADE IN CANADA