Product Information

Made in Germany

Article number: 4000013

ATF 600 ASIA

Automatic Transmission Fluid

DESCRIPTION

DEUTSCHÖL ATF 600 ASIA covers a wide range of possible applications, especially for vehicles from Asian manufacturers. Suited for life time application (please observe manufacturer's instructions) in automatic gear boxes, hydrostatic drives and power steering units.

THIS PRODUCT IS RECOMMENDED BY DEUTSCHÖL IF THE FOLLOWING FILLING REQUIREMENTS ARE REQUIRED:

Dexron VI, Dexron III, Dexron II (100°C Viscosity by Dexron III level adjusted)

Honda / Acura	DW-1, Z-1, ATF Type 3.0, Type 3.1
Hyundai / Kia	ATF Red-1K, Genuine ATF, JWS-3309 T-4 NWS-9638 T-5, P/N 040000C90SGT P/N UM040 CH20 Red-1, SP-II, SP-III, SP-IV, SPH-IV
Isuzu	ATF II, ATF III, Genuine ATF, P/N 08200-9001
Mazda	F-1, FW 6A EL, FW 6AX EL, FZ, JWS 3317, M-5 P/N XT-9-QMM5, M-III, Type T-IV
Mitsubishi	ATF-J2, ATF-J3, Dia Queen ATF-PA SP, P/N MS991156, SP-II, SP-III
Nissan / Infinity	402, Matic-D, -J, -K, -S, -W
Ssang Yong	DSIH 5M-66
Subaru	HP, P/N K0140Y0700
Suzuki	3314, 3317

Product Information

Made in Germany

Article number: 4000013

TYPICAL CHARACTERISTICS

Properties	Testing according	Data	Unit
Density at 15°C	DIN 51757	0,849	g/ml
Pourpoint	DIN ISO 3016	< -45	°C
Viscosity at 40 °C	DIN 51562	34	mm²/sec
Viscosity at 100 °C	DIN 51562	6,95	mm²/sec
Viskosity Index	DIN ISO 2909	170	

AVAILABLE PACKAGING

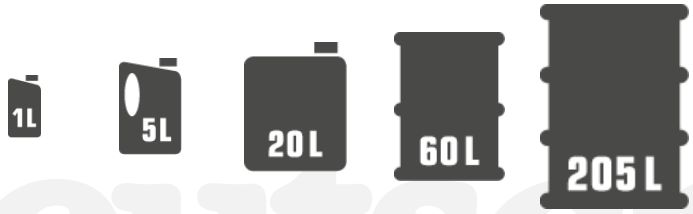

Item-number:	4000013-1	4000013-5	4000013-20	4000013-60	4000013-205

The information in this product data sheet is based on years of experience of our team and our partners. Our professional competence in the development and manufacturing of lubricants are based on the current state-of-the-art. Universally valid statements regarding the function of our lubricants are not possible, because the lubricant performance can be influenced by a series of factors. As a result, the lubricant filling process, the exact purpose of use, the general operating conditions, the system degree of wear and the system contamination etc. must be taken into account in particular in engines, machinery and equipment. The data given in this product data sheet represents general, non-binding guideline values. No warranty expressed or implied is given concerning the properties. We recommend to consult our team regarding the application conditions and requirements before the DEUTSCHÖL lubricant is used. The user should test the functional suitability of our lubricants in the intended application and use the product with the corresponding care and responsibility according to the manufacturer's specifications. Our products undergo continuous improvements. We therefore reserve the right to change our product program, the products and their manufacturing processes as well as all details at any time and without warning. Please note: Our products may not be used in aircraft and spacecraft or parts thereof.