

# DSi9 Ku *Pro*

Reflector  
diameter



90 cm

Tracking  
speed



up to 50°/s

Max.  
BUC power



25 W



## *Maritime VSAT antenna with 90 cm dish size and 3-axis motion system for Ku-Band services.*

The DSi9 Ku *Pro* employs state-of-the-art technology and is our most sought VSAT antenna in Ku-band. With the latest generation of tracking technology the DSi9 Ku *Pro* represents the perfect solution for all requirements of a reliable and fast internet on any type of maritime vessel.

EPAK designs and builds VSAT antennas to work even in the harshest weather conditions at sea. Only top quality materials are used and manufacturing is done in-house, observing tight quality control regulations and safety norms.

The result is a robust and rugged stabilized antenna system with high tracking accuracy. In short, the perfect solution for those who venture into the open seas without wanting to give up a stable and fast internet connection.

The DSi9 Ku *Pro* reaches excellent tracking performance under the hardest maritime motion profile "Class A", defined by Global VSAT Forum and Fraunhofer Institute.

### Remote Management Access

Access, monitor and control the DSi9 Ku *Pro* from any location in the world or set up an automated system diagnostics including event logging.

### Web Interface

EPAK VSAT antennas feature an embedded web-server to provide a web user interface for making configurations and accessing live data from the antenna for simplified troubleshooting and monitoring performance.

### Automatic Satellite Acquisition

The acquisition of the satellite is completely automated by DVB-S2-Receiver and Modem confirmation.

### Diversity Kit Compatibility

No more blind spots by combining the free line of sight ranges of two antennas in one bundle. That will prevent nearly any loss of satellite signals through blockades.

### Solid Hardware

Improved hardware reliability against sea conditions.



### KEY FEATURES:

- 3-axis motion system + auto skew
- Range movement from -15° to +120°
- Tracking speed up to 50°/s
- Easy to install
- 90 cm dish for high-quality signal reception and transmission
- Electronically switchable in x-pol and co-pol operation
- Compatible with most modems
- Ku-Band / Ka-Band convertible
- VoIP optional


<b>Feed Subsystem</b>	
<b>Reflector diameter</b>	90 cm (35.43")
<b>Minimum E.I.R.P.</b>	43 dBW
<b>LNB</b>	Universal (LOF 9.75/10.6 GHz, PLL stabilized, internal ref.)
<b>BUC</b>	Super extended Ku (LOF 12.80 GHz, PLL stabilized, external ref.)
<b>Available BUC power</b>	8 W / 16 W / 25 W
<b>RX antenna gain</b>	39.5 dBi @ 12.5 GHz
<b>TX antenna gain</b>	40.3 dBi @ 14.25 GHz
<b>RX / TX polarization</b>	Linear, Co-pol and X-pol
<b>G/T</b>	>18.2 dB/K (clear sky, 30 ° elevation)
<b>Position acquisition</b>	Internal GNSS (GPS / Glonass / Galileo / Beidou QZSS)
<b>Tracking receiver</b>	Internal, 950 - 2150 MHz; BW 0.5 - 50 MHz
<b>Frequency Band</b>	
<b>RX frequency</b>	10.7 - 12.75 GHz
<b>TX frequency</b>	13.75 - 14.5 GHz
<b>Convertible</b>	From Ku- to Ka-Band via separate kit
<b>Drive Subsystem</b>	
<b>Tracking technology</b>	Twin RF tracking receiver + 6D inertial + GNSS (NMEA input optional)
<b>Maximum tracking speed</b>	50°/s (each axis)
<b>Azimuth range</b>	Unlimited
<b>Elevation range</b>	-15° to +120°
<b>Skew range</b>	-120° to +120°
<b>Cross level range</b>	-45° to +45°
<b>Maximum ship motion</b>	<ul style="list-style-type: none"> <li>Roll ±35° @ 6 sec</li> <li>Pitch ±25° @ 6 sec</li> <li>Yaw ±15° @ 6 sec</li> </ul>
<b>Ship motion (for stabilization accuracy tests)</b>	<ul style="list-style-type: none"> <li>Roll ±30° @ 10-12 sec</li> <li>Pitch ±20° @ 8-10 sec</li> <li>Yaw ±8° @ 15 sec</li> </ul>
<b>Motion system</b>	3-axis + auto skew
<b>Miscellaneous</b>	
<b>Lock on time</b>	Typ. 20 sec (Time to online depends on modem)
<b>Satellite acquisition</b>	Completely automated by DVB-S2-Receiver and/or modem confirmation (according to ETSI 302 340)
<b>EPAK® Diversity-Kit compatible</b>	✓
<b>Modem approval</b>	Standard type approval; CE & EPAK type approval
<b>Operating temperature</b>	-30°C to 55°C
<b>Storage temperature</b>	-30°C to 85°C
<b>Humidity</b>	According to IEC 60945, 100% condensing
<b>Vibration</b>	According to IEC 60945; MIL-STD-167-1
<b>Shock</b>	According to IEC 60721-4-6; MIL-STD-810F
<b>Rain</b>	IP56
<b>Wind</b>	<ul style="list-style-type: none"> <li>Operational: &lt; 150 km/h</li> <li>Survival: &lt; 200 km/h</li> </ul>
<b>Compass safe distance</b>	≥ 2.00 m (according to IEC 60945) <ul style="list-style-type: none"> <li>CE (Maritime), ETSI</li> <li>Complies with the specifications of EC directive 2014/53/EU Radio &amp; Telecommunications Terminal Equipment (R&amp;TTE); compliance with EC directive 2014/35/EU, EMC directive 2014/30/EU and IEC 301-427</li> </ul>
<b>Compliance</b>	
<b>Power Specifications</b>	
<b>Power supply antenna (ODU)</b>	48 V DC (supplied by ACU)
<b>Antenna input voltage TX (BUC)</b>	24, 30, 48 V DC / 250 VA (supplied by ACU)
<b>Power consumption (ODU excl. BUC)</b>	Up to 150 VA (supplied by ACU)
<b>Dimensions and Weight</b>	
<b>Radome (D x H)</b>	111 cm x 114 cm (43.7" x 44.9")
<b>Weight (incl. radome)</b>	75 kg (165.35 lbs)

<b>Antenna Control Unit</b>	
<b>Dimensions</b>	48 cm x 4.45 cm x 47.8 cm (18.9" x 1.75" x 18.82") (19" Rack 1HU size)
<b>Weight</b>	5.1 kg (11.24 lbs)
<b>Gyro interface</b>	NMEA0183 / NMEA2000 (via RS422 or RS485 or RS232) / SIMRAD RGC11
<b>Input voltage, frequency</b>	90~264 V AC, 47~63 Hz
<b>External I/O</b>	RS232, RS422, Ethernet, USB, GPIO
<b>Local user interface</b>	OLED, directional pad, 2 push keys
<b>Modem interface</b>	Ethernet port + GPIO
<b>Modem protocols</b>	openAMIP / SNMP / Telnet / open BMIP
<b>Remote access</b>	TCP / IP
<b>Position acquisition</b>	Supplied by ODU
<b>Operating temperature</b>	-20°C to 55°C
<b>Storage temperature</b>	-40°C to 85°C
<b>Humidity</b>	According to IEC 60945
<b>IP class</b>	IP 30
<b>Compass safe distance</b>	0.5 m according to IEC 60945
<b>Supported modems</b>	

- iDirect iFINITI, Evolution, Velocity
- Hughes HX200
- ViaSat SBT-M
- Comtech CDM-250/840
- Gilat Skyedge II C4
- Paradise PD25L, Datacom Q-Flex
- Advantech VR700, VR7400
- STM Satlink 1910
- Romantis / Eastar UHP 1000 / UHP 2000
- others on request

<b>Cables and Connectors</b>	
<b>ACU to Antenna</b>	<ul style="list-style-type: none"> <li>• 2x Double shielded coax cable (ECOFLEX 10) with N-plugs</li> </ul>
<b>ACU to Modem</b>	<ul style="list-style-type: none"> <li>• 2x Double shielded coax cable (RG6) with F and TNC-plugs</li> <li>• 1x Ethernet crosslink with RJ45 plugs</li> </ul>
<b>ACU to Network</b>	<ul style="list-style-type: none"> <li>• Ethernet patch with RJ45 plugs</li> <li>• RS422/RS232 (9 Pin Sub-D)</li> </ul>

## Radome and ACU Dimensions

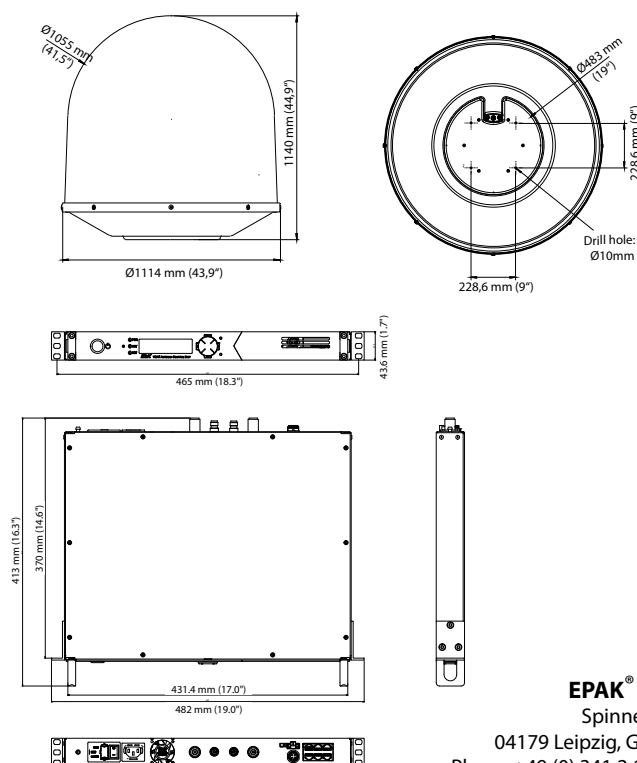

**EPAK® GmbH**  
Spinnereistr. 7

04179 Leipzig, Germany  
Phone +49 (0) 341 2 12 02 60  
Fax +49 (0) 341 2 12 02 66

For more information visit [www.epak.de](http://www.epak.de)