

Claron 1.5™

Bulk Solvent Cartridge

Key Specifications

- ¼" (6mm) throw distance
- Bulk use
- Single color
- Heavy solvent compatible
- ½" (13.5mm) print swath
- 600 DPI
- Drop mass: 22pl*
- Up to 1L yield*
- 12 kHz per nozzle*

Key Applications

- Primary package coding utilizing plastics, metals, and glass
- Variable data coding (lot/expiration)
- Other non-porous substrates

Contact Us

Funai Lexington Technology Corporation
700 Setzer Way
Lexington, KY USA 40508-1187
TEL +1(859)550-2070
MAIL contactus@funaiex.com
WEB www.funaiex.com

* Fluid Dependent

About Claron 1.5

Claron 1.5 is a bulk monochrome solvent industrial cartridge with 640 nozzles and a ½" print swath. With a 24kHz printing speed, Claron 1.5 nearly doubles the speed and/or resolution of the competition. Common uses include text, barcodes, and graphics on semi and non-porous substrates.

The cartridge design features long open times with aqueous/light solvent inks while ensuring a low cost of operation. On chip READ/WRITE memory ensures that only approved inks are utilized in OEM partner machines.

Target Customer

The ideal customer:

- Requires solvents in the ink formulation.
- Utilizes semi and non-porous substrates.
- Runs medium-to-large production batches or multiple shifts (24/7).

Print Speed Table



12 kHz Print Speed Translation

Horizontal DPI	Max. Line Speed* (Single Channel)	Max. Line Speed* (Dual Channel)	Sample Print Image (Simulated)
300	200 ft/min (~61 m/min)	400 ft/min (~122 m/min)	
150	400 ft/min (~122 m/min)	800 ft/min (~244 m/min)	
75	800 ft/min (~244 m/min)	1600 ft/min (~490 m/min)	

Powered by Funai

Funai focuses on research and development of thermal inkjet microfluidics for specialty printing, life sciences, and consumer applications. With more than 450 printing related patents, Funai is recognized as a top tier microfluidic designer and manufacturer with scaling capabilities to partner with global industries.

Digital Microfluidics

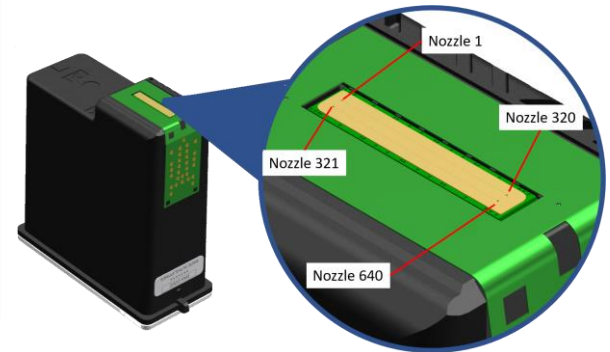

About

Model	Funai Model No: F2**UA, F2**EU	
Environmental Protection	RoHS / REACH	
Printable Images	Text Barcodes Graphics	
Ink Capacity	Ink fill (avg)	17ml
	Deliverable ink (avg)	Up to 1L*
Nozzles	640 (two rows of 320)	
Heater Pitch	600 DPI	
Print Swath	0.532" (13.5mm)	
Firing Frequency	12 kHz per nozzle*	
Pen Stall	Shetland	
Nozzle Sealing Method	Nozzle Clip	
Reservoir Type	Bladder	
Tubing Connector Size	1/8" (~3.2mm) ID	

Usage



Working Location	Indoor	
Working Temperature	15C~35C (~60F-95F)	
Working Humidity	8%-80% (non-condensing)	
Compatible Solvents	Methyl Ethyl Ketone Acetone Ethanol <50% Methanol	
Ink Properties	PH	7-8
	Surface Tension (dynes/cm)	24-45
	Viscosity (cP)	2-10
	Particle Size (nm)	111.00
Filling Method	Vacuum filler (LOBOZAR TECHNIK)	
Drop Size	22pl*	

Dimensions and Storage

Size(mm)	28.8(W) x 73.9(H) x 73.7(D)
Weight	40.6g
Storage Temperature (empty)	15C~50C (~60F-120F)
Storage Temperature (filled)	15C~35C (~60F-95F)
Storage Humidity	5%-80% (non-condensing)
ATM Pressure	<1609m (~5280ft)



Claron 1.5

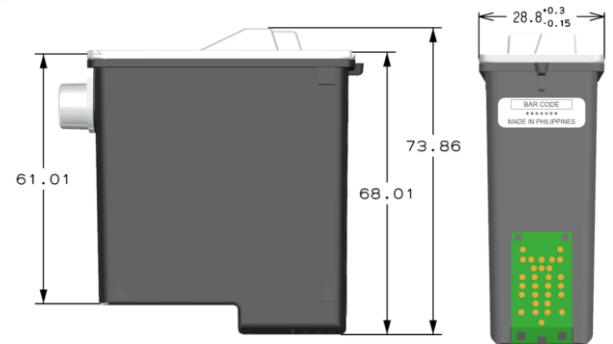

* Fluid Dependent

Data Page - Claron1.5_Rev0.docx
Revision Date: 5/29/2021