
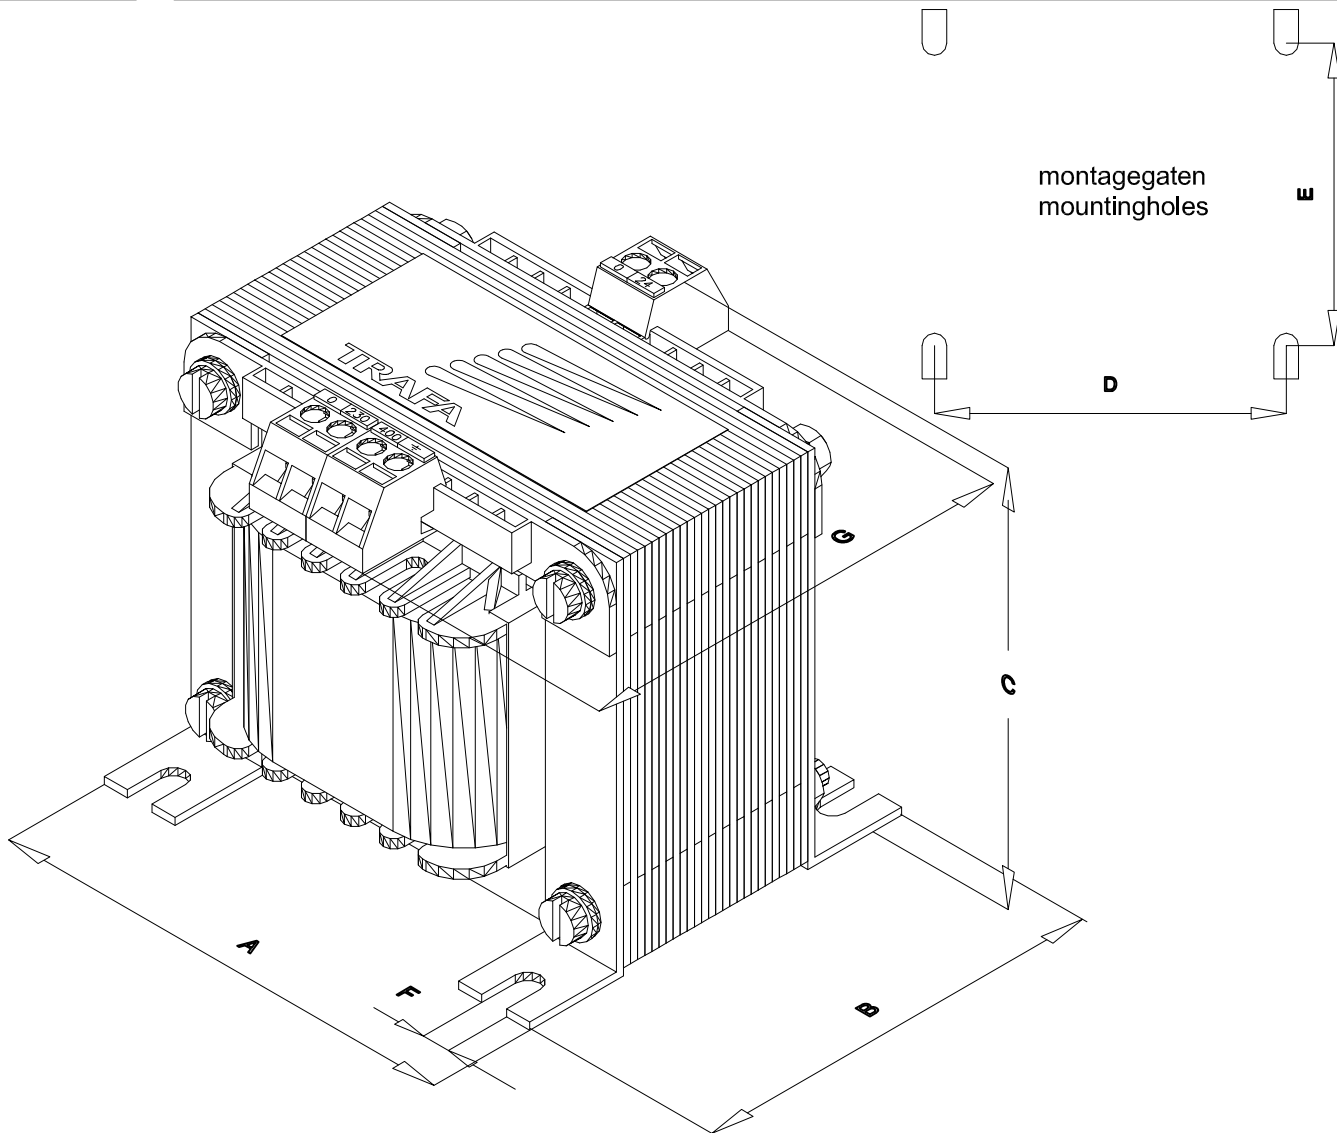


| |
|------|
| TYPE |
| STS |

| | |
|--|---|
| OMSCHRIJVING/DESCRIPTION stuurstroom transformator met aardscherm scheepsuitvoering tropen 45 °C auxiliary transformer with earthscreen ships tropical 45 °C Pri : 230V - 400V 50/60 Hz Sec : 24V |  |
|--|---|



| VA | A | B | C | D | E | F | G | KG |
|-----|-----|-------|-----|-----|------|---|-------|-----|
| 25 | 84 | 78 | 80 | 70 | 63 | 5 | 85,5 | 1,4 |
| 40 | 84 | 92 | 80 | 70 | 77 | 5 | 99,5 | 2,1 |
| 63 | 96 | 98 | 90 | 80 | 83 | 5 | 101,5 | 2,9 |
| 100 | 96 | 98 | 90 | 80 | 83 | 5 | 101,5 | 3,0 |
| 160 | 120 | 106,5 | 110 | 100 | 87,5 | 7 | 111 | 5,5 |
| 250 | 150 | 103,5 | 131 | 125 | 84,5 | 7 | 109 | 7,8 |

Maten in mm
Dimensions in mm

Specificaties kunnen wijzigen ten gevolge van continue productontwikkelingen.
specifications may vary as a result of continuous product development.

| | | | | | |
|----------|------------|-----|-------------|-----|---|
| REL.DATE | 13-10-2004 | C.B | PAGE 101-18 | ED. | C |
|----------|------------|-----|-------------|-----|---|