


Smart Hybrid Solar Inverter System SH5000

Intelligent system

Maximise self-consumption through built in relays.

Prewired BoS

For fast and low cost installation, including approved DC isolator.

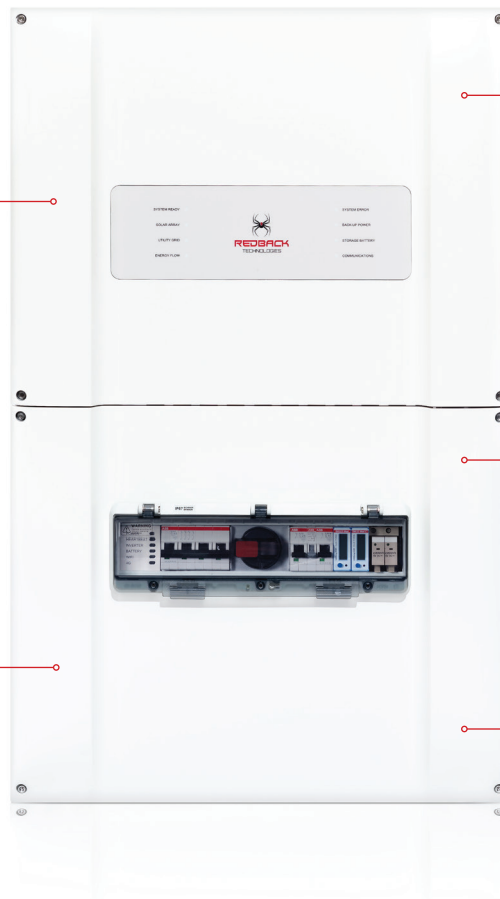

Uninterrupted power supply

Ensuring that your lights stay on, powered by your batteries.

IP65 rated

Can be installed inside or outside.

Monitoring

Generation and consumption monitoring via the cloud.


Energy for the future

Redback Technologies has a vision to enable every household and business to be entirely powered by low cost renewable energy all day, every day. The Redback Smart Hybrid System is the platform which facilitates all energy users to participate in the network of the future through clean, efficient and smart energy management. Redback Technologies, helping the world switch on renewable energy today for a cleaner tomorrow.

Energy flow



Dimensions

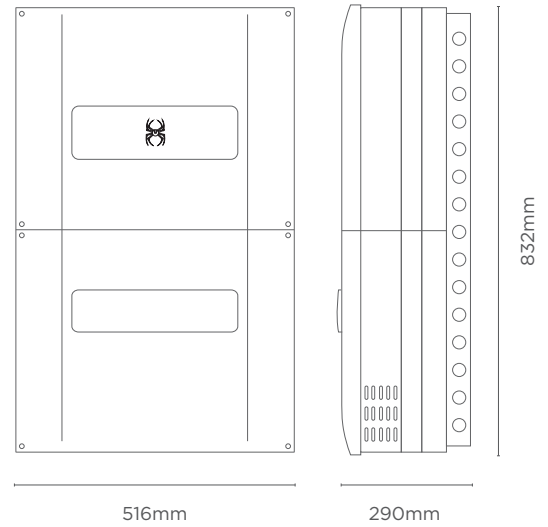

Specifications

Grid regulation compliance: AS4777.2, AS4777.3 Safety certification: AS3100, IEC62109-1, IEC62109-2, IEC62040-1

Solar array		SH5000
Number of solar array inputs	2	(individual maximum power point tracking)
Maximum DC open circuit voltage	580V DC	
MPPT operating range	125 – 550V	
Starting voltage	125V DC	
Maximum DC input current (for each solar array input)	11A DC	
Solar array switch rating	1000V DC	
Input connectors	H4	
Residual current and insulation monitoring	Integrated	
Utility interface		
Nominal AC voltage/frequency	230V AC, 50Hz, single phase	
Continuous AC power rating	5000W AC	
Maximum AC power to utility grid	5000W AC (derated over 45C ambient)	
Maximum AC current to utility grid	21.7A AC	
Maximum AC current from utility grid	40A AC	
Nominal AC output range	180 to 270V AC, 45 to 55Hz (adjustable)	
Current THD	Less than 1.5%	
Power factor	0.8 leading to 0.8 lagging (adjustable)	
AC overvoltage category	Category III	
Anti-islanding and AC overcurrent protection	Integrated	
Inverter topology	Transformerless (with HF transformer isolation for battery)	
Battery interface		
Nominal DC voltage	48V DC	
Battery compatibility	LG Chem LV Lithium-ion and PylonTech Lithium-ion	
Maximum charging and discharge power (from battery)	4600W DC	
Maximum charging current	85A DC	
Maximum discharging current	100A DC	
Battery charging method	BMS controlled	
Typical charging voltage (bulk/absorption phase)	57.0V DC	
Battery disconnect	Integrated 4 pole DC breaker 63A DC per pole	
Control interfaces		
Signal relay outputs	4	
DRM modes	0-8	
Remote firmware updates	Supported	
Relays	2 x 10A Omron	

Back up loads output	
Nominal AC voltage/frequency	230V AC, 50Hz, single phase
Continuous AC power rating	4600W AC (derate over 45°C ambient)
Maximum AC power rating	6900W AC (10 seconds maximum)
Maximum AC current	21.7A continuous, 30A for 10 seconds maximum
Voltage THD	Less than 3.0% (with linear loads)
Back-up loads AC disconnect	25A MCB
Manual back-up load AC bypass switch	Integrated
Efficiency	
Maximum efficiency (to utility grid)	97.6%
European averaged efficiency	97.0%
Maximum power point tracking efficiency	99.9%
Efficiency (powering loads from battery)	90% typical
Standby losses	Less than 8W AC
General data	
Dimensions (W x H x D)	516 mm x 832 mm x 290 mm
Mounting and weight	Inverter 32kg, BoS 12kg, total 44kg
Ambient temperature range	-25 to 60°C derate above 45°C
Relative humidity	0 to 95%
DC overcurrent category	Category II
Moisture location category	4K4H
Environmental protection rating	IP65
Cooling	Natural convection
Noise emissions	Less than 25dB
Warranty	5 years
User Interface	
Front panel display	Multi-coloured LED indicators
Communications	Integrated WiFi + ethernet for smartphone and web monitoring
Remote access	Web and android/iOS application
Power/energy monitoring	Includes 3 x utility grade (class 1) meters