



## Filter of the Futura series

Filter G1 5µm with PC bowl, bowl guard and semi automatic drain

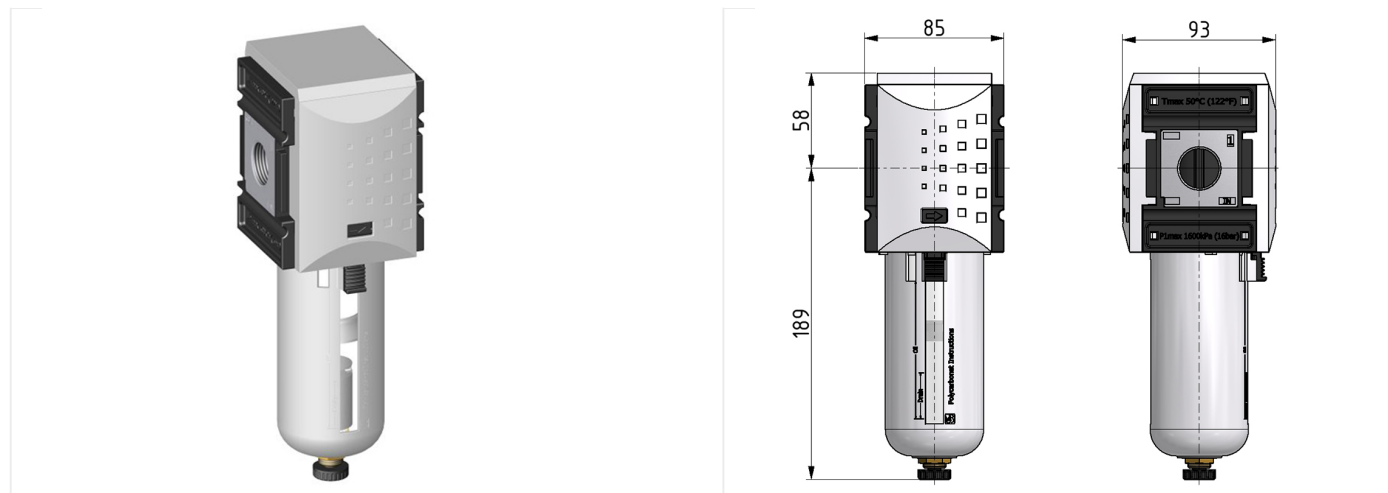


| type    | part-number | series | port size | flow rate  | weight   |
|---------|-------------|--------|-----------|------------|----------|
| KFIL-41 | 91304.GG00  | Futura | G 1       | 9000 l/min | 0.856 kg |

flow characteristic

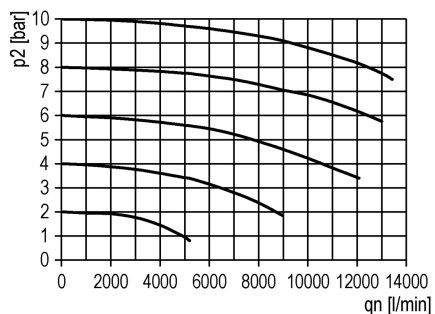

symbol



#### technical data

- **description:** sinter filter centrifugal principle
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** 0 - 50°C
- **bowl:** PC with PA bowl guard
- **drain:** HA
- **mounting:** vertical
- **filter element:** 5 µm

#### accessories



- mounting bracket:  
[KBW 4-1225](#)



- coupling kit wall mounting:  
[KKOP 4W](#)