Nautech Electronics
Smart, flexible electronic solutions

SPECTRA II
PILOT LIGHT BAR

Fully featured NZ Made Class I/II Pilot light bar, with a balanced array of LEDS providing an even distribution of light in both

The all new Spectra II Pilot light bar with its focus on quality function and unparalleled form will appeal to the discerning professional A grade pilot. The Spectra II outer shell retains its classic lines and is moulded with the highest quality polycarbonate available. The electronics, from the true colour magenta LEDs through to the internal sign lights like the rest of the light bar are built in a high-end facility right here in NZ. The Spectra II offers all the functionality one would expect to find in a modern Class I/II light bar, operated from a purpose built, compact controller that can be positioned anywhere in your cab with ease. This light bar eclipses all others and will enhance the professional imagine of any pilot and the vehicle it adorns.

Features

- Crystal clear lenses that resist fading
- High intensity LED modules (x18)
- Outputs for grill lights (x2)
- Rear facing wide angle sign lights (x2)
- Wide angle LED optic
- Coloured top lenses (clear optional)
- Sealed outer case with GORE-TEX® breathers
- Alloy base with adjustable feet
- 360 degrees of high impact warning
- Silent, no wind noise, no mechanical noise

Controller

Compact controller, touch screen panel with 6 back lit switches. Provides finger-tip control of the following functions

- Class I operation mode
- Class II operation mode
- Front only
- Rear only
- Grill lights Amber
- Grill lights Magenta

Layout and operation modes

Layout
Total 18 LEDS + 2 sign LEDS

Class I Operation Mode
5 magenta, 5 amber, 2 sign lights

Class II Operation mode
8 amber , 2 sign lights

TRAXION
p. 09 414 1137
e. sales@traxion.co.nz w. traxion.co.nz

Controller

The thin, 6 switch controller can be positioned anywhere in the cab by means of the double-sided self-adhesive tape provided. One central hole may be required for the serial cable which plugs into the back.

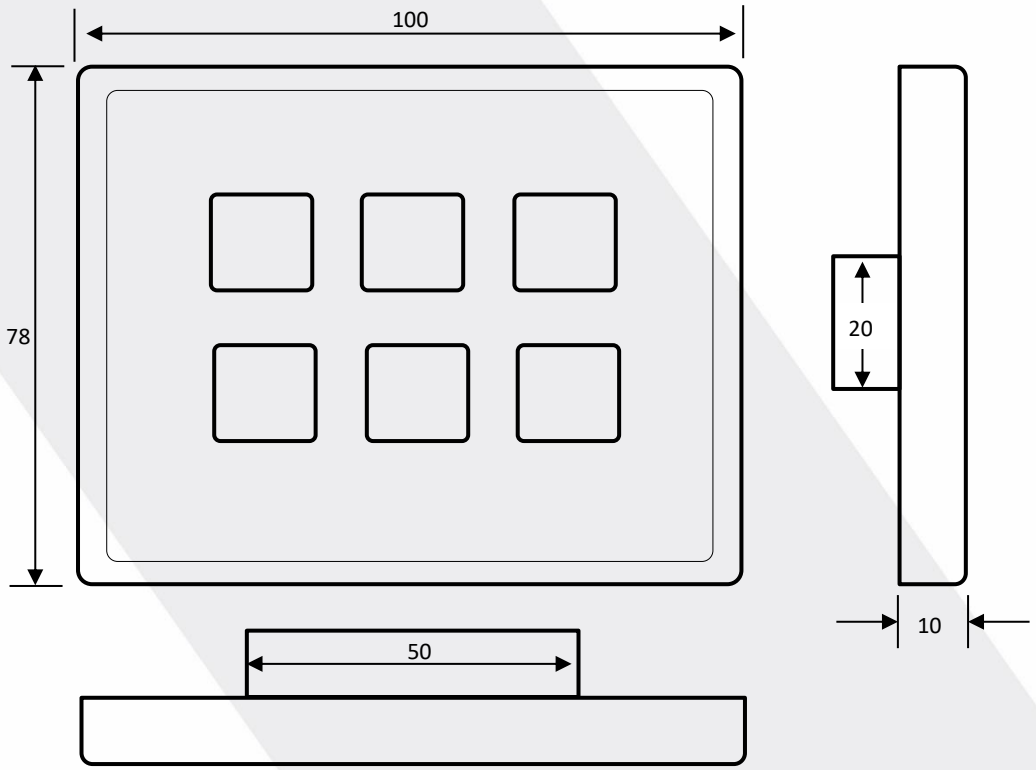

Mounting Arrangement

Channels exist along an alloy base. These accommodate the supplied 10mm coach bolts. Mounting feet are supplied predrilled at 95mm centres to match the channels

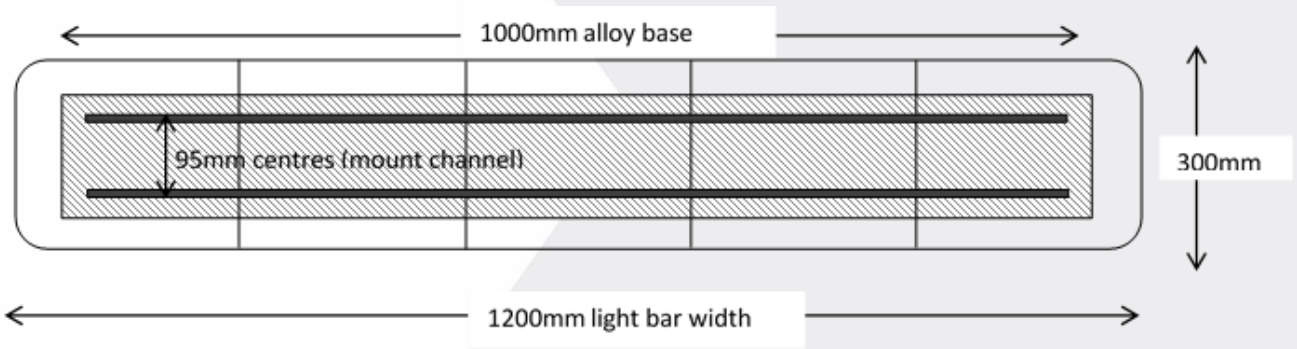

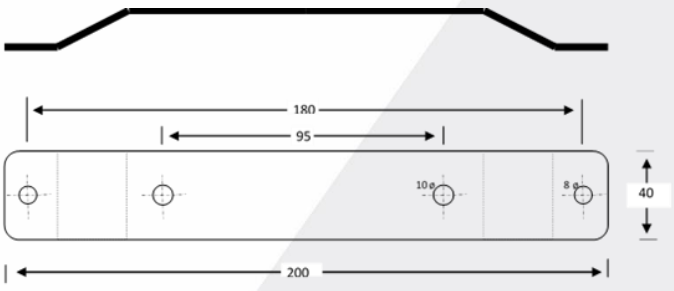

Mounting Feet

A pair of stainless-steel mounting feet are provided, these can be positioned anywhere along the mounting channel.

All dimensions are in mm