

# Silicone Solutions for Mold Making



# Mold Making Applications

## Rapid Prototyping / Precision Molding

Momentive Performance Materials offers a line-up of addition cure Mold Making silicones for prototyping applications and molds for complex precision parts. These addition cure products offer tear strength, tensile strength, and elongation properties that help provide dimensional stability while contributing to durability and handling of the mold.

The addition type curing mechanism, which relies on temperature exposure to facilitate the curing process, helps to control shrinkage during cure which is important for parts with intricate and complex design characteristics. The family of addition cure silicones also includes oil-bleeding grades that help improve the demolding process.

Products are available in a variety of colors and appearances, ranging from solids to translucent and transparent grades. The translucent and transparent grades are candidates for split molds that are cut after cure, and require optical clarity of the molded part.



## Art Reproduction, Craft, Figurines and Furniture

A portfolio of condensation cure molding making silicones, which cure in reaction to exposure to atmospheric moisture, is offered for a variety of applications.


General purpose grades such as TSE350, TSE3502 and TSE3504 are available in low viscosities and provide ease of handling and use for basic Mold Making requirements.

For applications involving intricate objects or requiring increase mold durability, a range of high tensile and tear strength condensation cure grades is also available in an array of viscosities.




# Product Selector Guide

## Addition Cure Grades

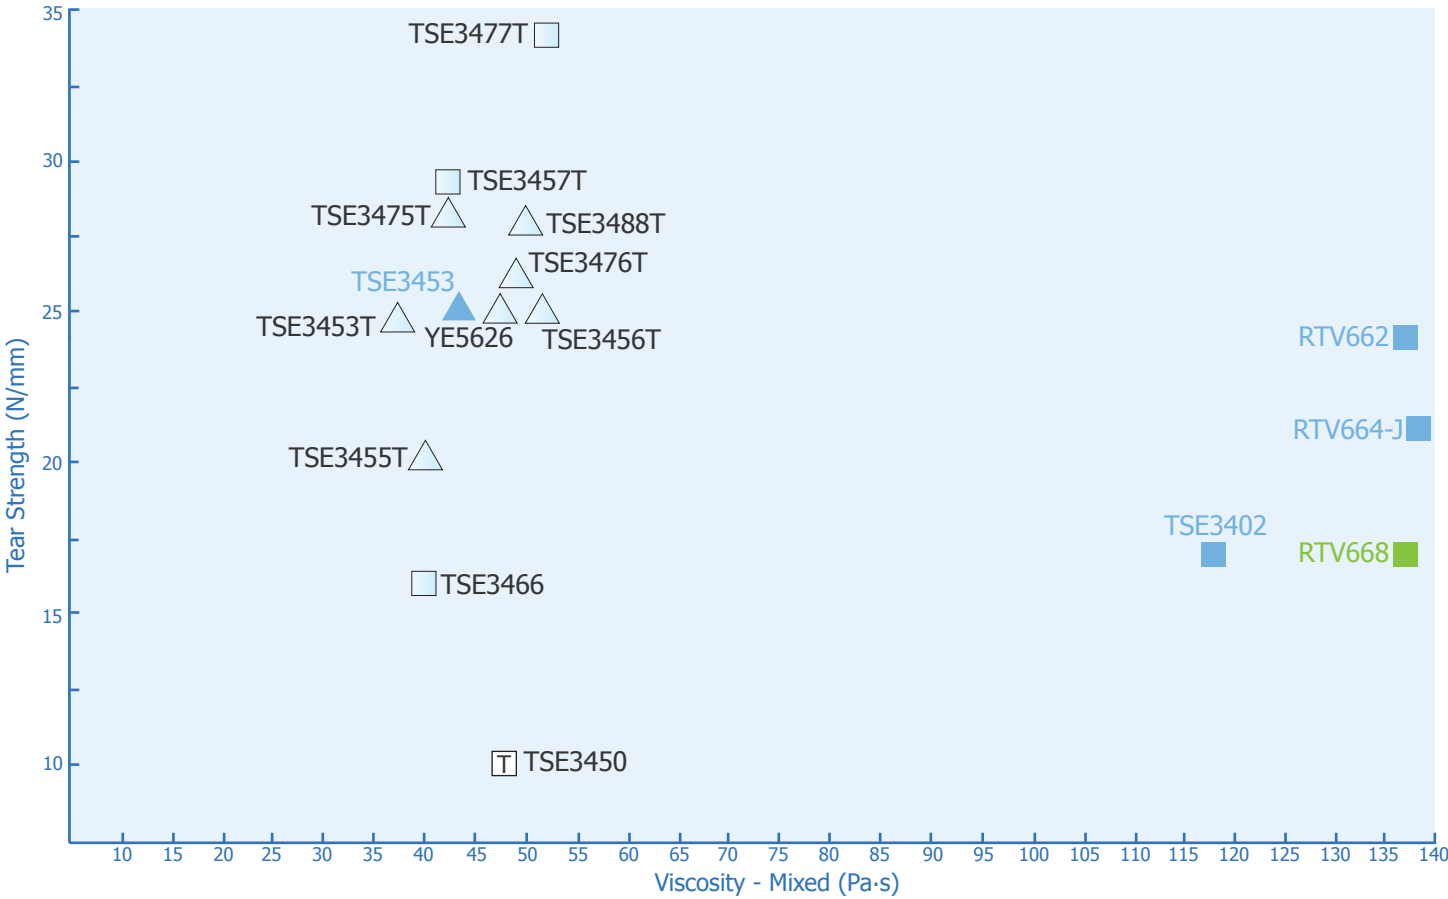

## Condensation Cure Grades

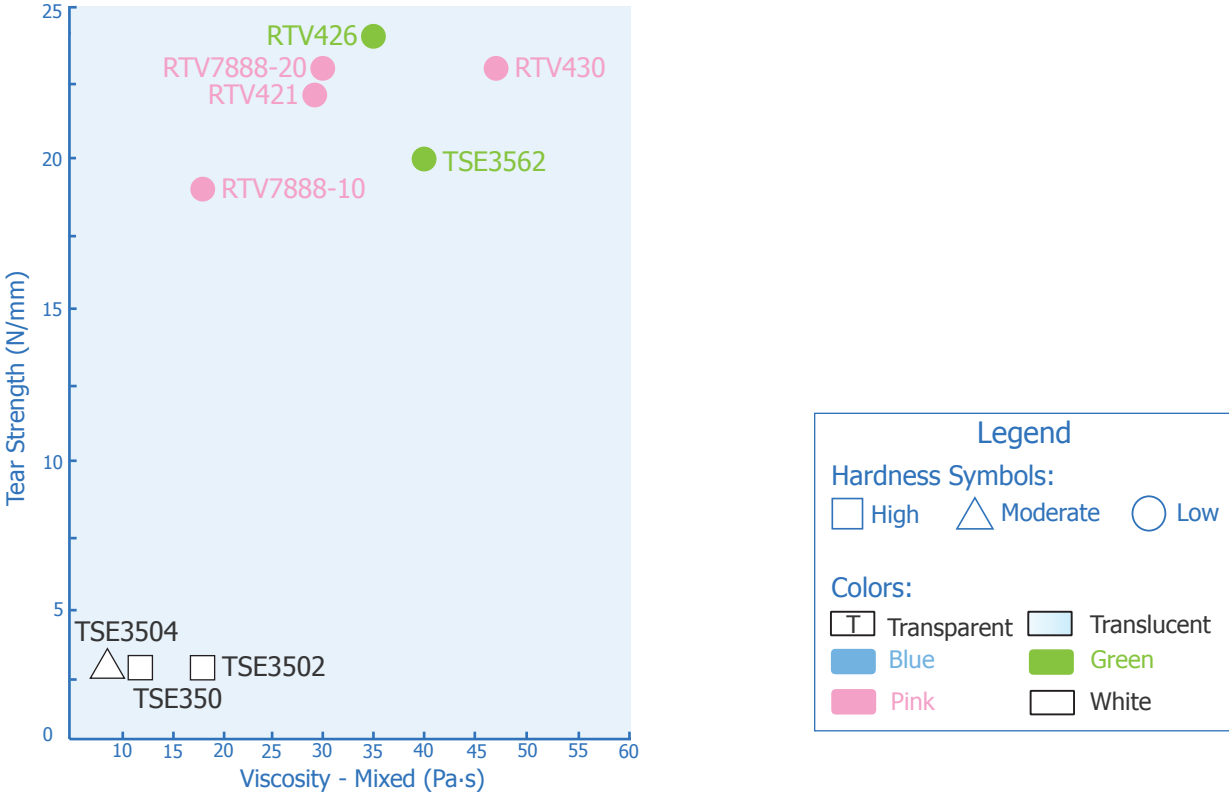

# Addition Cure Product Details

|                       |                                | High Hardness                                                        |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             | Moderate Hardness |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|-----------------------|--------------------------------|----------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------|-------------|--------------------------------------------------------|------------|---------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------|-------------|-------------------|---------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------|-------------|--------------------------------------------------------------------------------|-------------|--------------------------------------------------|------------|--------------------------------------------------|-------------|-----------------------------------------------|-------------|------------------------------------------------------------|-------------|---------------------------------------------------------------------------|-------------|-------------------------------------------------------------|-------------|
| Properties            |                                | RTV662                                                               |           | RTV668                                                                          |           | RTV664-J                                                                                       |             | TSE3466                                                                   |             | TSE3402                                                |            | TSE3457T                                                                                    |             | TSE3477T                                                                                          |             |                   | TSE3450                                                                         |             | TSE3455T                                                        |             | TSE3488T                                                                       |             | TSE3453                                          |            | TSE3453T                                         |             | YE5626                                        |             | TSE3456T                                                   |             | TSE3475T                                                                  |             | TSE3476T                                                    |             |
| Features and Benefits |                                | Highest hardness grade. Dimensional stability and extended worklife. |           | High hardness grade with dimensional stability. Demonstrates sulfur resistance. |           | High hardness grade. Dimensional stability, long worklife, and chemical & abrasion resistance. |             | High hardness and strength with low viscosity. Low shrinkage performance. |             | High hardness and strength. Low shrinkage performance. |            | High hardness and dimensional stability with good tear strength. Low shrinkage performance. |             | High tear strength & dimensional stability. Oil-Bleed assisted release performance. Low shrinkage |             |                   | High transparency grade. High hardness and dimensional stability. Low shrinkage |             | Low viscosity and good tear strength. Low shrinkage performance |             | Good tear strength and transparency, long work life, and fast cure performance |             | Good tear strength and low shrinkage performance |            | Good tear strength and low shrinkage performance |             | Good tear strength. Low shrinkage performance |             | Good tear and tensile strength. Low shrinkage performance. |             | High tear strength. Oil-Bleed assisted release performance. Low shrinkage |             | Good tear strength. Oil-Bleed assisted release performance. |             |
| Oil Bleed Type        |                                |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            |                                                                                             |             | ●                                                                                                 |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             | ●                                                          |             | ●                                                                         |             |                                                             |             |
| Uncured Properties    | Components                     | RTV662(A)                                                            | RTV662(B) | RTV668(A)                                                                       | RTV668(B) | RTV664-J(A)                                                                                    | RTV664-J(B) | TSE3466(A)                                                                | TSE3466(B)  | TSE3402(A)                                             | TSE3402(B) | TSE3457T(A)                                                                                 | TSE3457(C)  | TSE3477T(A)                                                                                       | TSE3477(C)  |                   | TSE3450(A)                                                                      | TSE3450(B)  | TSE3455T(A)                                                     | TSE3455T(B) | TSE3488T(A)                                                                    | TSE3488T(F) | TSE3453(A)                                       | TSE3453(B) | TSE3453T(A)                                      | TSE543T(B)  | YE5626(A)                                     | YE5626(B)   | TSE3456T(A)                                                | TSE3456(C)  | TSE3475T(A)                                                               | TSE3475(C)  | TSE3476T(A)                                                 | TSE3476(C)  |
|                       | Appearance                     | Beige                                                                | Blue      | Beige                                                                           | Green     | Beige                                                                                          | Blue        | Translucent                                                               | Transparent | Light Blue                                             | Blue       | Translucent                                                                                 | Transparent | Translucent                                                                                       | Transparent |                   | Transparent                                                                     | Transparent | Translucent                                                     | Transparent | Translucent                                                                    | Transparent | White                                            | Blue       | Translucent                                      | Transparent | Translucent                                   | Transparent | Translucent                                                | Transparent | Translucent                                                               | Transparent | Translucent                                                 | Transparent |
|                       | Viscosity (23°C) Pa-s          | 150                                                                  | 5         | 151                                                                             | 3.8       | 153                                                                                            | 6           | 55                                                                        | 0.3         | 130                                                    | 1.2        | 56                                                                                          | 2.5         | 62                                                                                                | 3.0         |                   | 70                                                                              | 1.5         | 45                                                              | 1.5         | 90                                                                             | 0.5         | 60                                               | 3          | 50                                               | 2.3         | 60                                            | 1.0         | 88                                                         | 3           | 68                                                                        | 1.0         | 70                                                          | 1.4         |
|                       | Mixing Ratio (by weight)       | 10 : 1                                                               |           | 10 : 1                                                                          |           | 10 : 1                                                                                         |             | 10 : 1                                                                    |             | 10 : 1                                                 |            | 10 : 1                                                                                      |             | 10 : 1                                                                                            |             |                   | 10 : 1                                                                          |             | 10 : 1                                                          |             | 10 : 1                                                                         |             | 10 : 1                                           |            | 10 : 1                                           |             | 10 : 1                                        |             | 10 : 1                                                     |             | 10 : 1                                                                    |             | 10 : 1                                                      |             |
|                       | Viscosity (mixed) (23°C) Pa-s  | 137                                                                  |           | 137                                                                             |           | 139                                                                                            |             | 40                                                                        |             | 118                                                    |            | 42                                                                                          |             | 52                                                                                                |             |                   | 48                                                                              |             | 40                                                              |             | 50                                                                             |             | 45                                               |            | 42                                               |             | 48                                            |             | 50                                                         |             | 42                                                                        |             | 48                                                          |             |
|                       | Pot Life (23°C) h              | 5                                                                    |           | 2.5                                                                             |           | 3                                                                                              |             | 1.5                                                                       |             | 2                                                      |            | 1.5                                                                                         |             | 1                                                                                                 |             |                   | 2                                                                               |             | 1.5                                                             |             | 3                                                                              |             | 2                                                |            | 1                                                |             | 1.5                                           |             | 1                                                          |             | 1                                                                         |             | 1.5                                                         |             |
|                       | Demold Time (23°C) h           | 24                                                                   |           | 24                                                                              |           | 18                                                                                             |             | 24                                                                        |             | 24                                                     |            | 24                                                                                          |             | 24                                                                                                |             |                   | 24                                                                              |             | 24                                                              |             | 72                                                                             |             | 24                                               |            | 24                                               |             | 24                                            |             | 24                                                         |             | 24                                                                        |             | 24                                                          |             |
| Cured Properties      | Appearance                     | Blue                                                                 |           | Green                                                                           |           | Blue                                                                                           |             | Translucent                                                               |             | Light Blue                                             |            | Translucent                                                                                 |             | Translucent                                                                                       |             |                   | Transparent                                                                     |             | Translucent                                                     |             | Translucent                                                                    |             | Light Blue                                       |            | Translucent                                      |             | Translucent                                   |             | Translucent                                                |             | Translucent                                                               |             | Translucent                                                 |             |
|                       | Specific Gravity (23°C)        | 1.26                                                                 |           | 1.26                                                                            |           | 1.26                                                                                           |             | 1.10                                                                      |             | 1.25                                                   |            | 1.10                                                                                        |             | 1.10                                                                                              |             |                   | 1.02                                                                            |             | 1.10                                                            |             | 1.08                                                                           |             | 1.10                                             |            | 1.09                                             |             | 1.09                                          |             | 1.09                                                       |             | 1.09                                                                      |             | 1.08                                                        |             |
|                       | Hardness                       | 68                                                                   |           | 62                                                                              |           | 62                                                                                             |             | 60                                                                        |             | 60                                                     |            | 47                                                                                          |             | 45                                                                                                |             |                   | 45                                                                              |             | 41                                                              |             | 40                                                                             |             | 40                                               |            | 40                                               |             | 40                                            |             | 39                                                         |             | 37                                                                        |             | 37                                                          |             |
|                       | Tensile Strength MPa (psi)     | 7.0 (1015)                                                           |           | 7.1 (1030)                                                                      |           | 6.4 (930)                                                                                      |             | 7.4 (1075)                                                                |             | 5.4 (785)                                              |            | 6.7 (970)                                                                                   |             | 6.3 (915)                                                                                         |             |                   | 4.5 (650)                                                                       |             | 6.4 (930)                                                       |             | 6.6 (960)                                                                      |             | 6.4 (930)                                        |            | 6.4 (930)                                        |             | 6.0 (870)                                     |             | 6.9 (1000)                                                 |             | 5.7 (825)                                                                 |             | 6.0 (870)                                                   |             |
|                       | Elongation %                   | 235                                                                  |           | 240                                                                             |           | 245                                                                                            |             | 350                                                                       |             | 220                                                    |            | 350                                                                                         |             | 320                                                                                               |             |                   | 350                                                                             |             | 360                                                             |             | 400                                                                            |             | 400                                              |            | 400                                              |             | 420                                           |             | 420                                                        |             | 400                                                                       |             | 380                                                         |             |
|                       | Tear Strength¹ N/mm (ppi)      | 24 (137)                                                             |           | 17 (100)                                                                        |           | 21 (122)                                                                                       |             | 16 (90)                                                                   |             | 17 (100)                                               |            | 29 (165)                                                                                    |             | 34 (194)                                                                                          |             |                   | 10 (57)                                                                         |             | 20 (114)                                                        |             | 28 (160)                                                                       |             | 25 (142)                                         |            | 25 (142)                                         |             | 25 (142)                                      |             | 25 (142)                                                   |             | 29 (165)                                                                  |             | 26 (148)                                                    |             |
|                       | Linear Shrinkage (23°C, 24h) % | <0.2                                                                 |           | <0.2                                                                            |           | <0.2                                                                                           |             | <0.1                                                                      |             | <0.1                                                   |            | <0.1                                                                                        |             | <0.1                                                                                              |             |                   | <0.1                                                                            |             | <0.1                                                            |             | <0.1                                                                           |             | <0.1                                             |            | <0.1                                             |             | <0.1                                          |             | <0.1                                                       |             | <0.1                                                                      |             | <0.1                                                        |             |
| Packaging             | 1.0 lb. (454g) kit             | ●                                                                    |           | ●                                                                               |           |                                                                                                |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 11 lbs. (5kg) kit              |                                                                      |           |                                                                                 |           | ●                                                                                              |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 44 lbs. (20kg) kit             | ●                                                                    |           | ●                                                                               |           | ●                                                                                              |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 495 lbs. (225kg) kit           | ●                                                                    |           | ●                                                                               |           | ●                                                                                              |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 100g bottle                    |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           | ●           |                                                        | ●          |                                                                                             | ●           |                                                                                                   | ●           |                   |                                                                                 | ●           |                                                                 | ●           |                                                                                | ●           |                                                  | ●          |                                                  | ●           |                                               | ●           |                                                            | ●           |                                                                           | ●           |                                                             |             |
|                       | 600g bottle                    |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        | ●          |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             | ●                                             |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 1kg can                        |                                                                      |           |                                                                                 |           |                                                                                                |             | ●                                                                         | ●           | ●                                                      |            | ●                                                                                           | ●           | ●                                                                                                 | ●           |                   | ●                                                                               | ●           | ●                                                               | ●           | ●                                                                              | ●           | ●                                                | ●          | ●                                                | ●           | ●                                             | ●           | ●                                                          | ●           | ●                                                                         | ●           | ●                                                           |             |
|                       | 1.8kg can                      |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               | ●           |                                                            |             |                                                                           |             |                                                             |             |
|                       | 10kg pail                      |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            | ●                                                                                           | ●           | ●                                                                                                 | ●           |                   |                                                                                 |             | ●                                                               |             |                                                                                | ●           |                                                  | ●          |                                                  |             | ●                                             |             |                                                            |             |                                                                           | ●           |                                                             |             |
|                       | 18kg pail                      |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           | ●           | ●                                                      |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                | ●           |                                                  |            |                                                  |             |                                               | ●           |                                                            |             |                                                                           |             |                                                             |             |
|                       | 20kg pail                      |                                                                      |           |                                                                                 |           |                                                                                                |             | ●                                                                         |             |                                                        |            | ●                                                                                           |             | ●                                                                                                 | ●           |                   | ●                                                                               |             | ●                                                               |             | ●                                                                              |             | ●                                                | ●          |                                                  |             |                                               | ●           |                                                            | ●           |                                                                           |             |                                                             |             |
|                       | 180kg drum                     |                                                                      |           |                                                                                 |           |                                                                                                |             | ●                                                                         |             |                                                        |            |                                                                                             |             |                                                                                                   |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            |                                                  |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
|                       | 200kg drum                     |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            |                                                                                             |             | ●                                                                                                 |             |                   |                                                                                 |             |                                                                 |             |                                                                                |             |                                                  |            | ●                                                |             |                                               |             |                                                            |             |                                                                           |             |                                                             |             |
| Catalyst Alternatives |                                |                                                                      |           |                                                                                 |           |                                                                                                |             |                                                                           |             |                                                        |            | TSE3457(D)<br>(machine mixing)                                                              |             | TSE3477(D)<br>(machine mixing)                                                                    |             |                   |                                                                                 |             |                                                                 |             | TSE3488T (E)<br>(fast cure)                                                    |             |                                                  |            | TSE3453T (D)<br>(machine mixing)                 |             |                                               |             | TSE3456 (D)<br>(machine mixing)                            |             | TSE3475 (D)<br>(machine mixing)                                           |             | TSE3476 (D)<br>(machine mixing)                             |             |

<sup>1</sup> Crescent method

Typical property data values should not be used as specifications

## Cure Inhibition

Cure inhibition may occur with addition cure Mold Making silicone, depending on the materials that come into contact with the silicone during cure. Surfaces containing water, sulphur, nitrogen compounds, organic metal compounds or phosphate compounds may inhibit cure.

Cure inhibition is characterized by a gummy or sticky appearance of the silicone at the interface between the silicone and the offending substrate. Inhibition can be prevented by application of a barrier coat, cleaning of the offending material prior to application of silicone, or selection of a condensation cure Mold Making grade.




Condensation Cure Product Details

|                       |                                | High Hardness                                                            |      |                                                                          |      | Moderate Hardness                                                                                 |      | Low Hardness                                                       |        |                                             |            |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|-----------------------|--------------------------------|--------------------------------------------------------------------------|------|--------------------------------------------------------------------------|------|---------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------|--------|---------------------------------------------|------------|------------------------------------------------------------|---------|-----------------------------------|---------|--|-------------------------------------------------------------------------|---------|-------------------------------------------------|---------|
| Properties            |                                | TSE3502                                                                  |      | TSE350                                                                   |      | TSE3504                                                                                           |      | RTV430                                                             |        | TSE3562                                     |            | RTV426                                                     |         | RTV7888-20                        |         |  | RTV421                                                                  |         | RTV7888-10                                      |         |
| Features and Benefits |                                | General purpose material with low viscosity and good release properties. |      | General purpose material with low viscosity and good release properties. |      | General purpose material with low viscosity and good release properties. Fast demold performance. |      | High tear strength, dimensional stability, and thermal resistance. |        | Good tear strength and material durability. |            | High tear strength material, with fast demold performance. |         | High tear strength.               |         |  | High tear strength. Good material flexibility. Fast demold performance. |         | Low viscosity material with good tear strength. |         |
| Uncured Properties    | Components                     | TSE3502                                                                  | CE62 | TSE350                                                                   | CE62 | TSE3504                                                                                           | CE62 | RTV430                                                             | Beta 5 | TSE3562(A)                                  | TSE3562(B) | RTV426                                                     | Beta 26 | RTV7888-20                        | Beta 16 |  | RTV421                                                                  | Beta 16 | RTV7888-10                                      | Beta 16 |
|                       | Appearance                     | White                                                                    | Red  | White                                                                    | Red  | White                                                                                             | Red  | White                                                              | Red    | White                                       | Green      | Beige                                                      | Green   | White                             | Red     |  | Beige                                                                   | Red     | White                                           | Red     |
|                       | Viscosity (23°C) Pa·s          | 20                                                                       | -    | 12                                                                       | -    | 10                                                                                                | -    | 55                                                                 | 0.05   | 45                                          | -          | 40                                                         | 0.021   | 42                                | 0.03    |  | 40                                                                      | 0.03    | 29                                              | 0.03    |
|                       | Mixing Ratio (by weight)       | 100 : 0.5                                                                |      | 100 : 0.5                                                                |      | 100 : 0.5                                                                                         |      | 10 : 1                                                             |        | 10 : 1                                      |            | 10 : 0.5                                                   |         | 10 : 1                            |         |  | 10 : 1                                                                  |         | 10 : 1                                          |         |
|                       | Viscosity (mixed) (23°C) Pa·s  | 18                                                                       |      | 10                                                                       |      | 10                                                                                                |      | 47                                                                 |        | 40                                          |            | 35                                                         |         | 30                                |         |  | 29                                                                      |         | 18                                              |         |
|                       | Pot Life (23°C) h              | 1                                                                        |      | 1                                                                        |      | 0.5                                                                                               |      | 3                                                                  |        | 1                                           |            | 2                                                          |         | 1.5                               |         |  | 1.5                                                                     |         | 1.5                                             |         |
|                       | Demold Time (23°C) h           | 24                                                                       |      | 24                                                                       |      | 8                                                                                                 |      | 12                                                                 |        | 24                                          |            | 4.6                                                        |         | 24                                |         |  | 12                                                                      |         | 24                                              |         |
| Cured Properties      | Appearance                     | Stone White                                                              |      | Stone White                                                              |      | White                                                                                             |      | Pink                                                               |        | Light Green                                 |            | Green                                                      |         | Pink                              |         |  | Pink                                                                    |         | Pink                                            |         |
|                       | Specific Gravity (23°C)        | 1.48                                                                     |      | 1.18                                                                     |      | 1.22                                                                                              |      | 1.09                                                               |        | 1.09                                        |            | 1.11                                                       |         | 1.22                              |         |  | 1.23                                                                    |         | 1.22                                            |         |
|                       | Hardness                       | 60                                                                       |      | 47                                                                       |      | 40                                                                                                |      | 30                                                                 |        | 28                                          |            | 25                                                         |         | 20                                |         |  | 18                                                                      |         | 12                                              |         |
|                       | Tensile Strength MPa (psi)     | 4.9 (710)                                                                |      | 2.5 (365)                                                                |      | 2.5 (365)                                                                                         |      | 3.1 (450)                                                          |        | 4.2 (610)                                   |            | 3.3 (485)                                                  |         | 3.4 (500)                         |         |  | 3.6 (530)                                                               |         | 2.75 (400)                                      |         |
|                       | Elongation %                   | 130                                                                      |      | 170                                                                      |      | 170                                                                                               |      | 300                                                                |        | 400                                         |            | 310                                                        |         | 350                               |         |  | 400                                                                     |         | 450                                             |         |
|                       | Tear Strength¹ N/mm (ppi)      | 3 (17)                                                                   |      | 3 (17)                                                                   |      | 3 (17)                                                                                            |      | 23 (130)                                                           |        | 20 (114)                                    |            | 24 (137)                                                   |         | 23 (130)                          |         |  | 23 (130)                                                                |         | 19 (110)                                        |         |
|                       | Linear Shrinkage (23°C, 24h) % | <0.1                                                                     |      | <0.1                                                                     |      | <0.1                                                                                              |      | <0.5                                                               |        | <0.3                                        |            | <0.05                                                      |         | <0.14                             |         |  | <0.2                                                                    |         | <0.17                                           |         |
| Packaging             | 10g bottle                     |                                                                          | ●    |                                                                          | ●    |                                                                                                   | ●    |                                                                    |        |                                             |            |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 100g bottle                    |                                                                          | ●    |                                                                          | ●    |                                                                                                   | ●    |                                                                    |        |                                             | ●          |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 1 pint (568ml) bottle          |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             | ●          |                                                            | ●       |                                   |         |  | ●                                                                       |         | ●                                               |         |
|                       | 900g can                       |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             | ●          |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 1kg can                        | ●                                                                        |      | ●                                                                        |      | ●                                                                                                 |      |                                                                    |        | ●                                           |            |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 2 quart (2.3ltr) bottle        |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    | ●      |                                             |            |                                                            | ●       |                                   | ●       |  |                                                                         | ●       |                                                 | ●       |
|                       | 2 quart (2.3ltr) can           |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             |            |                                                            |         |                                   | ●       |  |                                                                         | ●       |                                                 | ●       |
|                       | 1 gal (3.8ltr) pail            |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    | ●      |                                             |            |                                                            | ●       |                                   | ●       |  | ●                                                                       |         |                                                 |         |
|                       | 18kg pail                      |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             | ●          |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 5 gal (19ltr) pail             |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    | ●      |                                             |            |                                                            | ●       | ●                                 |         |  | ●                                                                       |         |                                                 |         |
|                       | 20 kg pail                     | ●                                                                        |      | ●                                                                        |      | ●                                                                                                 |      |                                                                    |        |                                             |            |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 6 gal (22.8ltr) pail           |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             |            |                                                            |         | ●                                 | ●       |  |                                                                         | ●       | ●                                               | ●       |
|                       | 180kg drum                     |                                                                          |      |                                                                          |      |                                                                                                   |      |                                                                    |        |                                             | ●          |                                                            |         |                                   |         |  |                                                                         |         |                                                 |         |
|                       | 55 gal (209ltr) drum           |                                                                          |      |                                                                          |      |                                                                                                   |      | ●                                                                  |        |                                             |            |                                                            | ●       |                                   | ●       |  | ●                                                                       |         | ●                                               |         |
| Catalyst Alternatives |                                | CE60 (red)<br>Fast cure                                                  |      | CE60 (red)<br>Fast Cure                                                  |      | CE60 (red)<br>Fast Cure                                                                           |      | Beta 11 (blue)<br>High-flexibility                                 |        | TSE3562(F)<br>Fast demolding                |            |                                                            |         | Beta 17 (clear)<br>Fast demolding |         |  |                                                                         |         | Beta 17 (clear)<br>Fast demolding               |         |
|                       |                                | CE61 (red-brown)<br>Slow cure                                            |      | CE61 (red-brown)<br>Slow Cure                                            |      | CE61 (red-brown)<br>Slow Cure                                                                     |      |                                                                    |        |                                             |            |                                                            |         | Beta 18 (red)<br>Low hardness     |         |  |                                                                         |         | Beta 18 (red)<br>Low hardness                   |         |

<sup>1</sup> Crescent method

Typical property data values should not be used as specifications

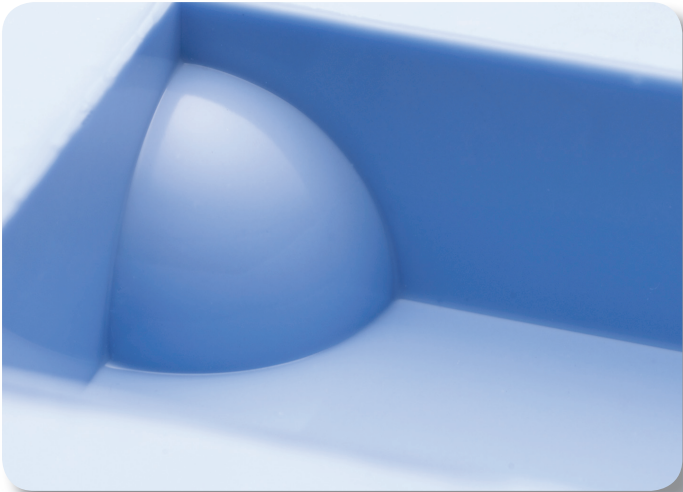

# Accessory Products

## Inhibitors

Inhibitors serve to increase the working time of mixed Mold Making silicones by delaying the rate of cure. However, high inhibitor concentrations can affect post-cure material properties, making a preliminary test essential.

| Inhibitor Grade           | ME75                   | ME70                   |
|---------------------------|------------------------|------------------------|
| Compatible Silicone Type  | Addition Cure          | Condensation Cure      |
| Appearance                | Colorless, Transparent | Colorless, Transparent |
| Typical Concentration wt% | 0.01 - 0.5             | 0.1 - 1.0              |
| Pkg                       | 100g bottle            |                        |
|                           | 1kg bottle             |                        |

## Thinners

Thinners are dilution additives that reduce the viscosity of Mold Making silicones, and also lower post-cure hardness and modulus.

| Thinner Grade             | ME91                  | ME90              | SF97-50     |
|---------------------------|-----------------------|-------------------|-------------|
| Compatible Silicone Type  | Addition Cure         | Condensation Cure | All         |
| Appearance                | Transparent           | Transparent       | Transparent |
| Viscosity (25°C)          | 3.0 (Pa-s)            | -                 | 50 (cstk)   |
| Typical Concentration wt% | 0.1 - 20.0            | 0.1 - 20.0        | ~ 7.0       |
| Pkg                       | 1.0 lb. (454g) bottle |                   |             |
|                           | 1kg bottle            |                   |             |

## Thixotropic Agent

SF1188A can be used as a thixotropic agent with condensation cure products, and is typically used to allow the mold making silicone to be applied to vertical surfaces.

| Thixotropic Agent         | SF1188A        |
|---------------------------|----------------|
| Color                     | Clear to straw |
| Viscosity (25°C) cstk     | 800-1400       |
| Specific Gravity (25°C)   | 1.04           |
| Typical Concentration wt% | ~3.0           |

## Color Master

| Color Master Grade        | ME50-B  | ME50-G | ME50-M | ME50-R2   | ME50-Y |
|---------------------------|---------|--------|--------|-----------|--------|
| Color                     | Black   | Gray   | Blue   | Red Brown | Yellow |
| Viscosity (25°C) Pa-s     | 200     | 150    | 800    | 250       | 800    |
| Typical Concentration wt% | 2.0     | 2.0    | 2.0    | 2.0       | 2.0    |
| Pkg                       | 1kg can |        |        |           |        |

## Performance Examples

| ME75 (Addition Cure)              |    | Ratio 1 | Ratio 2 | Ratio 3 |
|-----------------------------------|----|---------|---------|---------|
| YE5626 (A)                        | wt | 100     | 100     | 100     |
| YE5626 (B)                        | wt | 10      | 10      | 10      |
| ME75                              | wt | 0       | 0.2     | 0.4     |
| Viscosity (120 min. at 25°C) Pa-s |    | 120     | 85      | 65      |

| ME70 (Condensation Cure)         |    | Ratio 1 | Ratio 2 | Ratio 3 |
|----------------------------------|----|---------|---------|---------|
| TSE3562 (A)                      | wt | 100     | 100     | 100     |
| TSE3562 (B)                      | wt | 10      | 10      | 10      |
| ME70                             | wt | 0       | 0.5     | 1.0     |
| Viscosity (60 min. at 25°C) Pa-s |    | 100     | 90      | 55      |
| Viscosity (70 min. at 25°C) Pa-s |    | 190     | 125     | 60      |

## Performance Example

| ME90 (Condensation Cure)   |    | Ratio 1   | Ratio 2   | Ratio 3   | Ratio 4   |
|----------------------------|----|-----------|-----------|-----------|-----------|
| TSE3562 (A)                | wt | 100       | 100       | 100       | 100       |
| TSE3562 (B)                | wt | 10        | 10        | 10        | 10        |
| ME90                       | wt | 0         | 5         | 10        | 20        |
| Viscosity (25°C) Pa-s      |    | 40        | 32        | 24        | 15        |
| Hardness                   |    | 30        | 27        | 24        | 20        |
| Tensile Strength MPa (psi) |    | 4.2 (610) | 4.0 (580) | 3.4 (495) | 2.9 (420) |
| Elongation %               |    | 400       | 420       | 390       | 390       |
| Tear Strength N/mm (ppi)   |    | 20 (114)  | 20 (114)  | 4 (23)    | 3 (17)    |

## Model Sealer / Barrier-Coat

Model sealers help minimize cure inhibition of addition cure Mold Making material, and is applied as a thin layer (0.01 - 0.02mm) to the master containing the offending substrate. Model sealers can also be used as a parting agent to aid mold release in addition cure two-part molds.


| Model Sealer            | SS4171P                      |
|-------------------------|------------------------------|
| Color                   | Blue                         |
| Specific Gravity (25°C) | 0.84                         |
| Non-Volatile Content %  | 14                           |
| Dry Time min            | 30                           |
| Solvents                | Acetone, Isopropanol, Xylene |

# Molding Processes


## Seamless Simple Mold




**Step 1:** Place the master model on the mold board, and enclose on all four sides with a frame. Clay may be applied on the bottom of the master to securely attach it to the mold board.

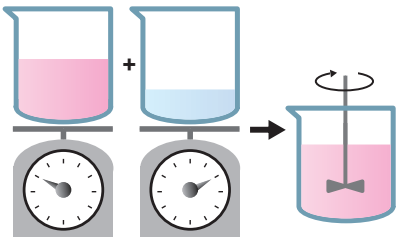

**Step 2:** Measure the base material and catalyst by weight as specified for the silicone grade selected. Thoroughly mix the components.




**Step 3:** Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container with of adequate size (4 to 5 times) is required.

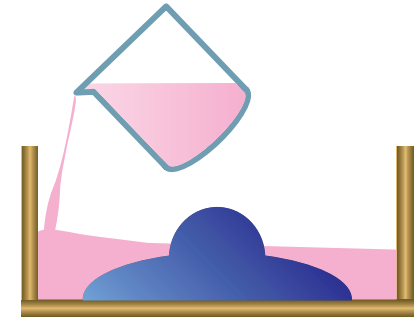

**Step 4:** Begin pouring the material, starting first at a low point in the mold. Allow the silicone to cure for the specified time.




**Step 5:** After the silicone has cured, remove the mold walls, and gently release the master model from the mold board. Release the master model from the silicone mold, and remove any flash that may have developed on the edges of the mold.

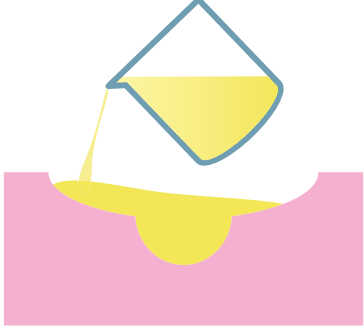

**Step 6:** Prepare the casting resin as specified by the manufacturer, pour into the silicone mold, and allow to cure.


## Seamless Lost Wax Mold

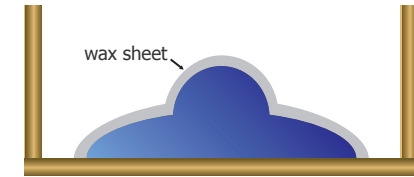


**Step 1:** Place the master model on the mold board, and enclose on all four sides with a frame. Apply a wax sheet on the master model surface (thickness 0.5-1.0cm). Avoid using wax containing sulfur.




**Step 2:** Pour a base material (plaster, polyester, etc.) and allow to harden.

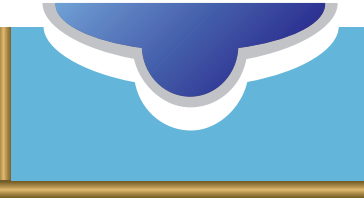


**Step 3:** Flip the mold and remove the wax layer and master model.

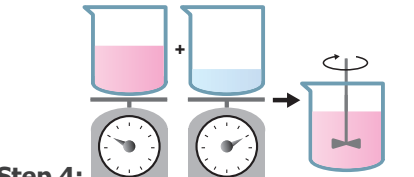

**Step 4:** Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

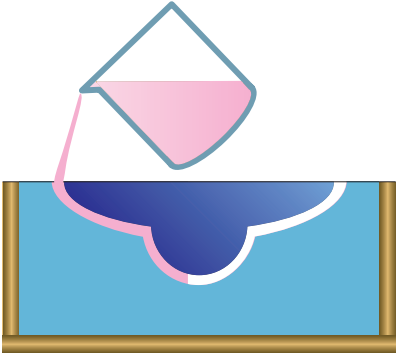


**Step 5:** Secure the master model to the mold so the base is flush with the base material. Pour silicone into the cavity between the base and master model. Cure the silicone according to the specified conditions.

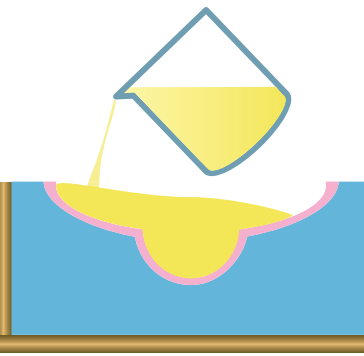


**Step 6:** Remove the master model. Prepare the casting resin as specified by the manufacturer, pour into the silicone mold, and allow to cure.

Mass-Cast Seam Line Mold


Mass casting a 3-dimensional part that does not have a flat side involves the creation of a part line in a split mold configuration. A split mold avoids "locking" the master model inside the silicone mold by pouring and curing the silicone Mold Making material in two steps. The ideal location for placing a part line depends upon the shape of the master part.

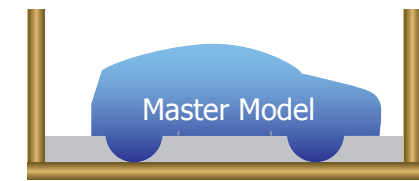


**Step 1:** Place the master model in the mold frame, and 2 parting line. The flat surface can be created by either milling a cavity in the mold board to the appropriate depth and shape, or by embedding the bottom of the master in clay.

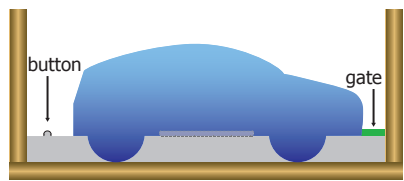


**Step 2:** Use a non-reactive and easy to use material, such as pattern wax, to create button indentations that will be used to allow the 2 halves to mechanically inter-lock and align. Using similar material, create a gate from the model to the frame. The gate will later be used to pour casting resin into the mold.

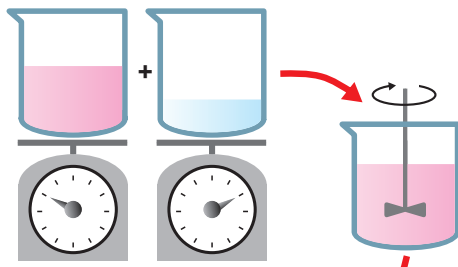


**Step 3:** Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

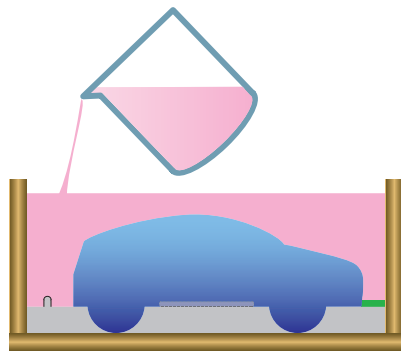



**Step 4:** Pour the silicone mixture, and allow to fully cure as specified. It is advisable to vacuum-degas once again after pouring, as some air will enter the silicone while pouring. After the silicone has fully cured, remove the frame from the base, and flip the mold to reveal the underside of the mold. Clean the parting line by removing clay that was used to create the parting line and any flash that developed. Also remove the wax material for the alignment mechanism.

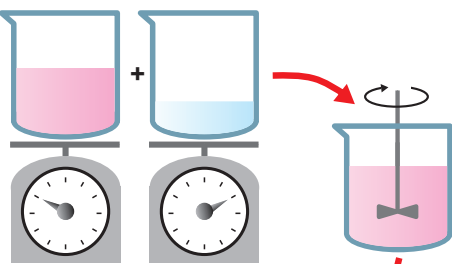


**Step 5:** Repeat step 3 to prepare the silicone material for the 2nd half of the mold.

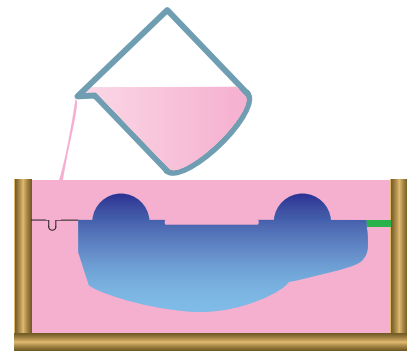


**Step 6:** Pour the mixed and degassed silicone to create the 2nd half. It is advisable to vacuum-degas once again after pouring, as some air will enter the silicone while pouring. Allow to fully cure as specified.

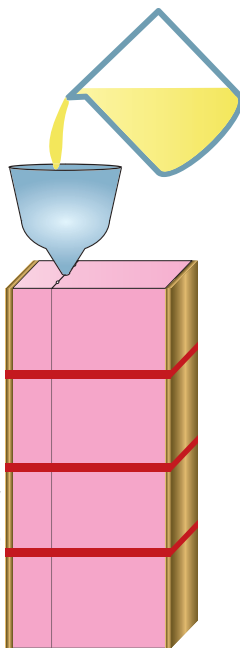

**Step 9:** Prepare the casting resin as specified by the manufacturer, pour into the silicone mold via the gate, and allow to cure.

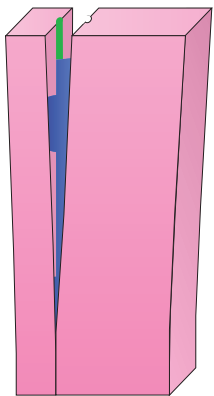


**Step 7:** Remove the frame and base, and gently pull apart the 2 halves to expose the model. Remove the model and clean as necessary. If air vents were not cast-in, cut vents into one of the halves.

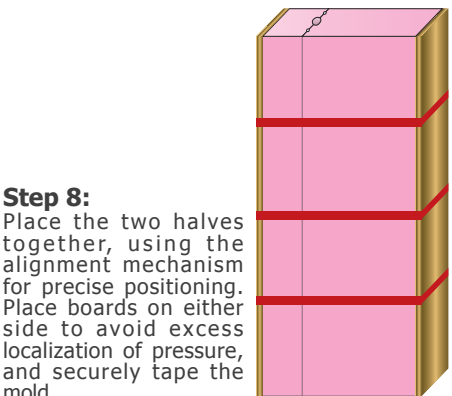


**Step 8:** Place the two halves together, using the alignment mechanism for precise positioning. Place boards on either side to avoid excess localization of pressure, and securely tape the mold.

Mass-Cast Seam Line Cut Mold


Mass casting a 3-dimensional part can also be accomplished by a single pour mold whose parting line is cut, rather than being created through two pouring processes. Parts that have a natural part line that is conducive to cutting, are candidates for this process. The benefit of a cut mold is the reduction in cure time associated with the elimination of a 2nd pouring and curing process. Optical clarity of translucent or transparent molding making grades aids the cutting process.




**Step 1:** Parts with a prominent natural parting line are candidates for mass-molding with a seam line and cut process. Tape may be applied to the edges to create a parting line away from the model, and aid the cutting process later.

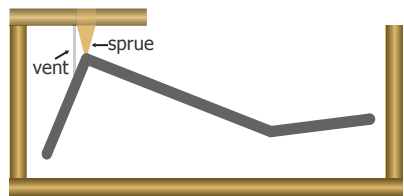


**Step 2:** Enclose the part in a frame. The part can be suspended by attaching a sprue, which will also serve as the gate for pouring resin in the completed mold. Cast air vents can be created by attaching physical connections such as wires, which will also help to stabilize the part while pouring.

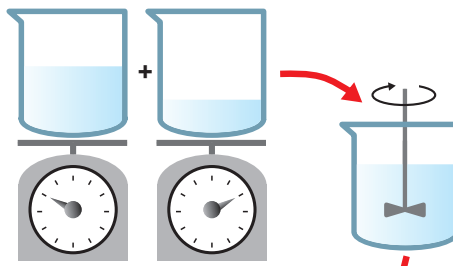


**Step 3:** Measure the base material and catalyst by weight as specified for the grade selected. Mix the components thoroughly. Vacuum-degas the silicone mixture to remove air that became entrapped during mixing. The mixture will rise while degassing, and therefore, a container of adequate size (4 to 5 times) is required.

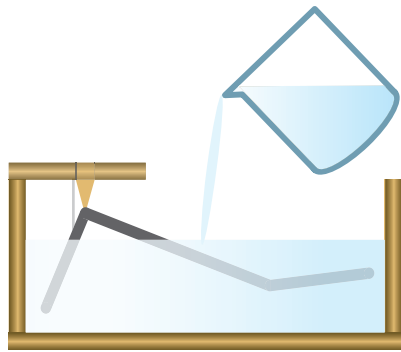


**Step 4:** Begin pouring the material, starting first at a low point in the mold. It is advisable to vacuum degas once again after pouring, as some air will enter the silicone while pouring. Allow the silicone to cure for the specified time and conditions.

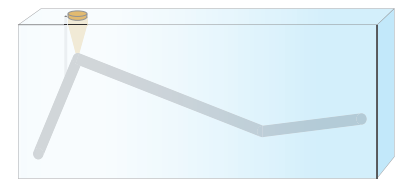


**Step 5:** After the silicone has cured, remove the frame and supporting structure. Remove any flash that may have developed along the edges.

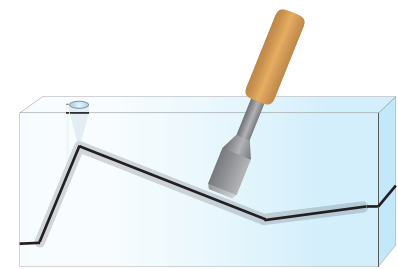


**Step 6:** Use a knife to cut along the part line. It is preferable that the cut is made in 2 to 3 passes, rather than attempting to cut to the part in a single cut. The pattern of the cut will create a natural alignment that will help when preparing the two halves for pouring resin.

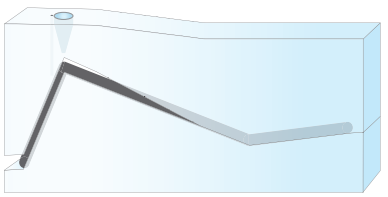

**Step 7:** Gently separate the 2 halves to expose the part. Remove the part, the sprue, cast-in air vent material, and any flash that may have developed around the gate and air vents.

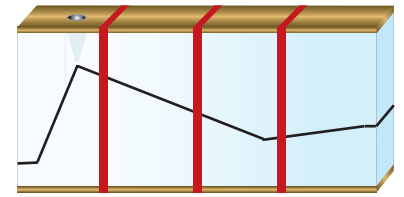

**Step 8:** Place the two halves together, using the cut parting line for alignment. Place boards on either side to avoid excess localization of pressure, and securely tape the mold.

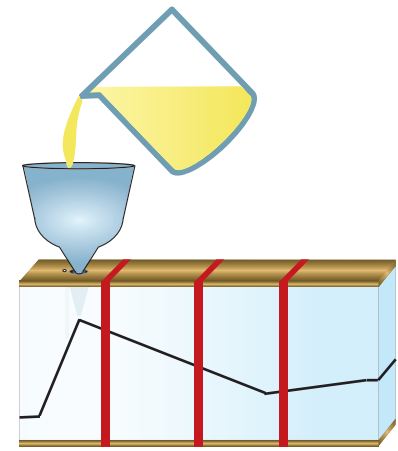

**Step 9:** Prepare the casting resin as specified by the manufacturer, pour into the silicone mold via the gate, and allow to cure.

## Principal Locations

| Regional Information                                                                                                                                                                                                                | Phone                                                                                                                                                                                                                        | Fax                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>North America</b><br>World Headquarters<br>187 Danbury Road<br>Wilton, CT 06897, USA                                                                                                                                             | 800.295.2392                                                                                                                                                                                                                 | 607.754.7517                                                                 |
| <b>Latin America</b><br>Rodovia Eng. Constâncio Cintra, Km 78,5<br>Itatiba, SP - 13255-700<br>Brazil                                                                                                                                | +55.11.4534.9650                                                                                                                                                                                                             | +55.11.4534.9660                                                             |
| <b>Europe, Middle East, Africa and India</b><br>Leverkusen<br>Germany                                                                                                                                                               | 00.800.4321.1000<br>+31.164.293.276                                                                                                                                                                                          | +31.164.241.750                                                              |
| <b>Pacific</b><br>Akasaka Park Building<br>5-2-20 Akasaka, Minato-Ku<br>Tokyo 107-6112 Japan                                                                                                                                        | +81.3.5544.3100                                                                                                                                                                                                              | +81.3.5544.3101                                                              |
| <b>Customer Service Centers</b>                                                                                                                                                                                                     |                                                                                                                                                                                                                              |                                                                              |
| <b>North America</b><br>Charleston, WV 25314, USA<br>E-mail: <a href="mailto:cs-na.silicones@momentive.com">cs-na.silicones@momentive.com</a>                                                                                       | <b>Specialty Fluids</b><br>800.523.5862<br><b>UA, Silanes, Resins, and Specialites</b><br>800.334.4674<br><b>RTV Products - Elastomers</b><br>800.332.3390<br><b>Sealants and Adhesives and Construction</b><br>877.943.7325 | 304.746.1654<br>304.746.1623<br>304.746.1623<br>304.746.1654                 |
| <b>Latin America</b><br>Argentina and Chile<br>Brazil<br>Mexico and Central America<br>Venezuela, Ecuador, Peru, Colombia and Caribbean<br>E-mail: <a href="mailto:cs-la.silicones@momentive.com">cs-la.silicones@momentive.com</a> | +54.11.4862.9544<br>+55.11.4534.9650<br>+52.55.5899.5132<br>+58.212.285.2149                                                                                                                                                 | +54.11.4862.9544<br>+54.11.4534.9660<br>+52.55.5899.5138<br>+58.212.285.2149 |
| <b>Europe, Middle East, Africa and India</b><br>E-mail: <a href="mailto:cs-la.silicones@momentive.com">cs-la.silicones@momentive.com</a>                                                                                            | 00.800.4321.1000<br>+31.164.293.276                                                                                                                                                                                          | +31.164.241.750                                                              |
| <b>Pacific</b><br>Japan<br>China<br>Korea<br>Singapore<br>E-mail: <a href="mailto:cs-ap.silicones@momentive.com">cs-ap.silicones@momentive.com</a>                                                                                  | +81.276.20.6182<br>+86.800.820.0202<br>+82.2.6201.4600<br>+65.6220.7022                                                                                                                                                      |                                                                              |
| <b>Worldwide Hotline</b><br><b>Worldwide Web</b>                                                                                                                                                                                    | <b>800.295.2392</b><br><b><a href="http://www.momentive.com">www.momentive.com</a></b>                                                                                                                                       | <b>+607.786.8131</b><br><b>+607.786.8309</b>                                 |

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH & Co. KG, MOMENTIVE PERFORMANCE MATERIALS SUISSE Sarl, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.