HT-MT750AX

5G Cellular Gateway
AX3600 Dual-Band WiFi6

HEIGHTS

Access

5G Cellular | 2.5G Active ETH

WiFi 6

2.4G 4X4 | 5G 4X4

Product Specifications

Wireless Features.

Wireless Standard	802.11 a/b/g/n/ac/ax
Wireless Signal Rates	Up to 3.6 Gbps
2.4GHz Band	4x4 11ax up to 1.2 Gbps
5GHz Band	4x4 11ax up to 2.4 Gbps
Operating Mode	Auto by default
Wireless Communication	Enable
Wireless Security	WPA / WPA2 / WPA3
Auto channel selection	Supported
Single SSID	Supported
Steering	Band & Client steering
Security	Enabled
SSID Broadcast Control	Enabled
Transmission speed	Wireless Auto

Network Features.

5G NR/LTE	3GPP R15
WCDMA	3GPP R8
5G Sub-6	n1, n3, n5 n7, n8, n20, n28, n38, n40, n41, n71, n77, n78, n79
LTE FDD	B1, B3, B5, B7, B8, B20, B28, B32, B71
LTE TDD	B38, B40, B41, B42, B43
NSA and SA	Supported
SRS	n41, n77, n78, n79
1T2R, 1T4R, 2T4R	Supported
HPUE	n41, n78, n79
Sub-6 SA	DL 4.67Gbps/UL 1.25Gbps
Sub-6 NSA	DL 3.74Gbps/UL 730Mbps
LTE	DL 1.6Gbps (CAT19) UL 211Mbps (CAT18)
UMTS/HSPA+	DL UTMS: 384kbps/UL 384kbps DL DC-HSPA+: 42 Mbps (CAT24) /UL 11.5Mbps (CAT7)

Security Features.

NAT for basic firewall support	Supported
Packet filtering firewall	Supported
Password authentication to gateway	Supported

System Features.

Configuration download / upload	Supported
Telnet / SSH	Supported
SNTP	Supported
Web management	Supported
Self-Healing	Supported
TR-069	Supported
OTA upgrade	Supported

Physical Features.

Interface	FXS, Type C USB3.0, Ethernet, Power
Power Supply	12V 3A DC
Button	Reset, Power On/Off, WPS
Dimension	223mm x 113mm x 113mm
Operating Humidity	10% ~ 95%, noncondensing
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 70° C
Storage Humidity	5% ~ 90%, noncondensing

Interface.

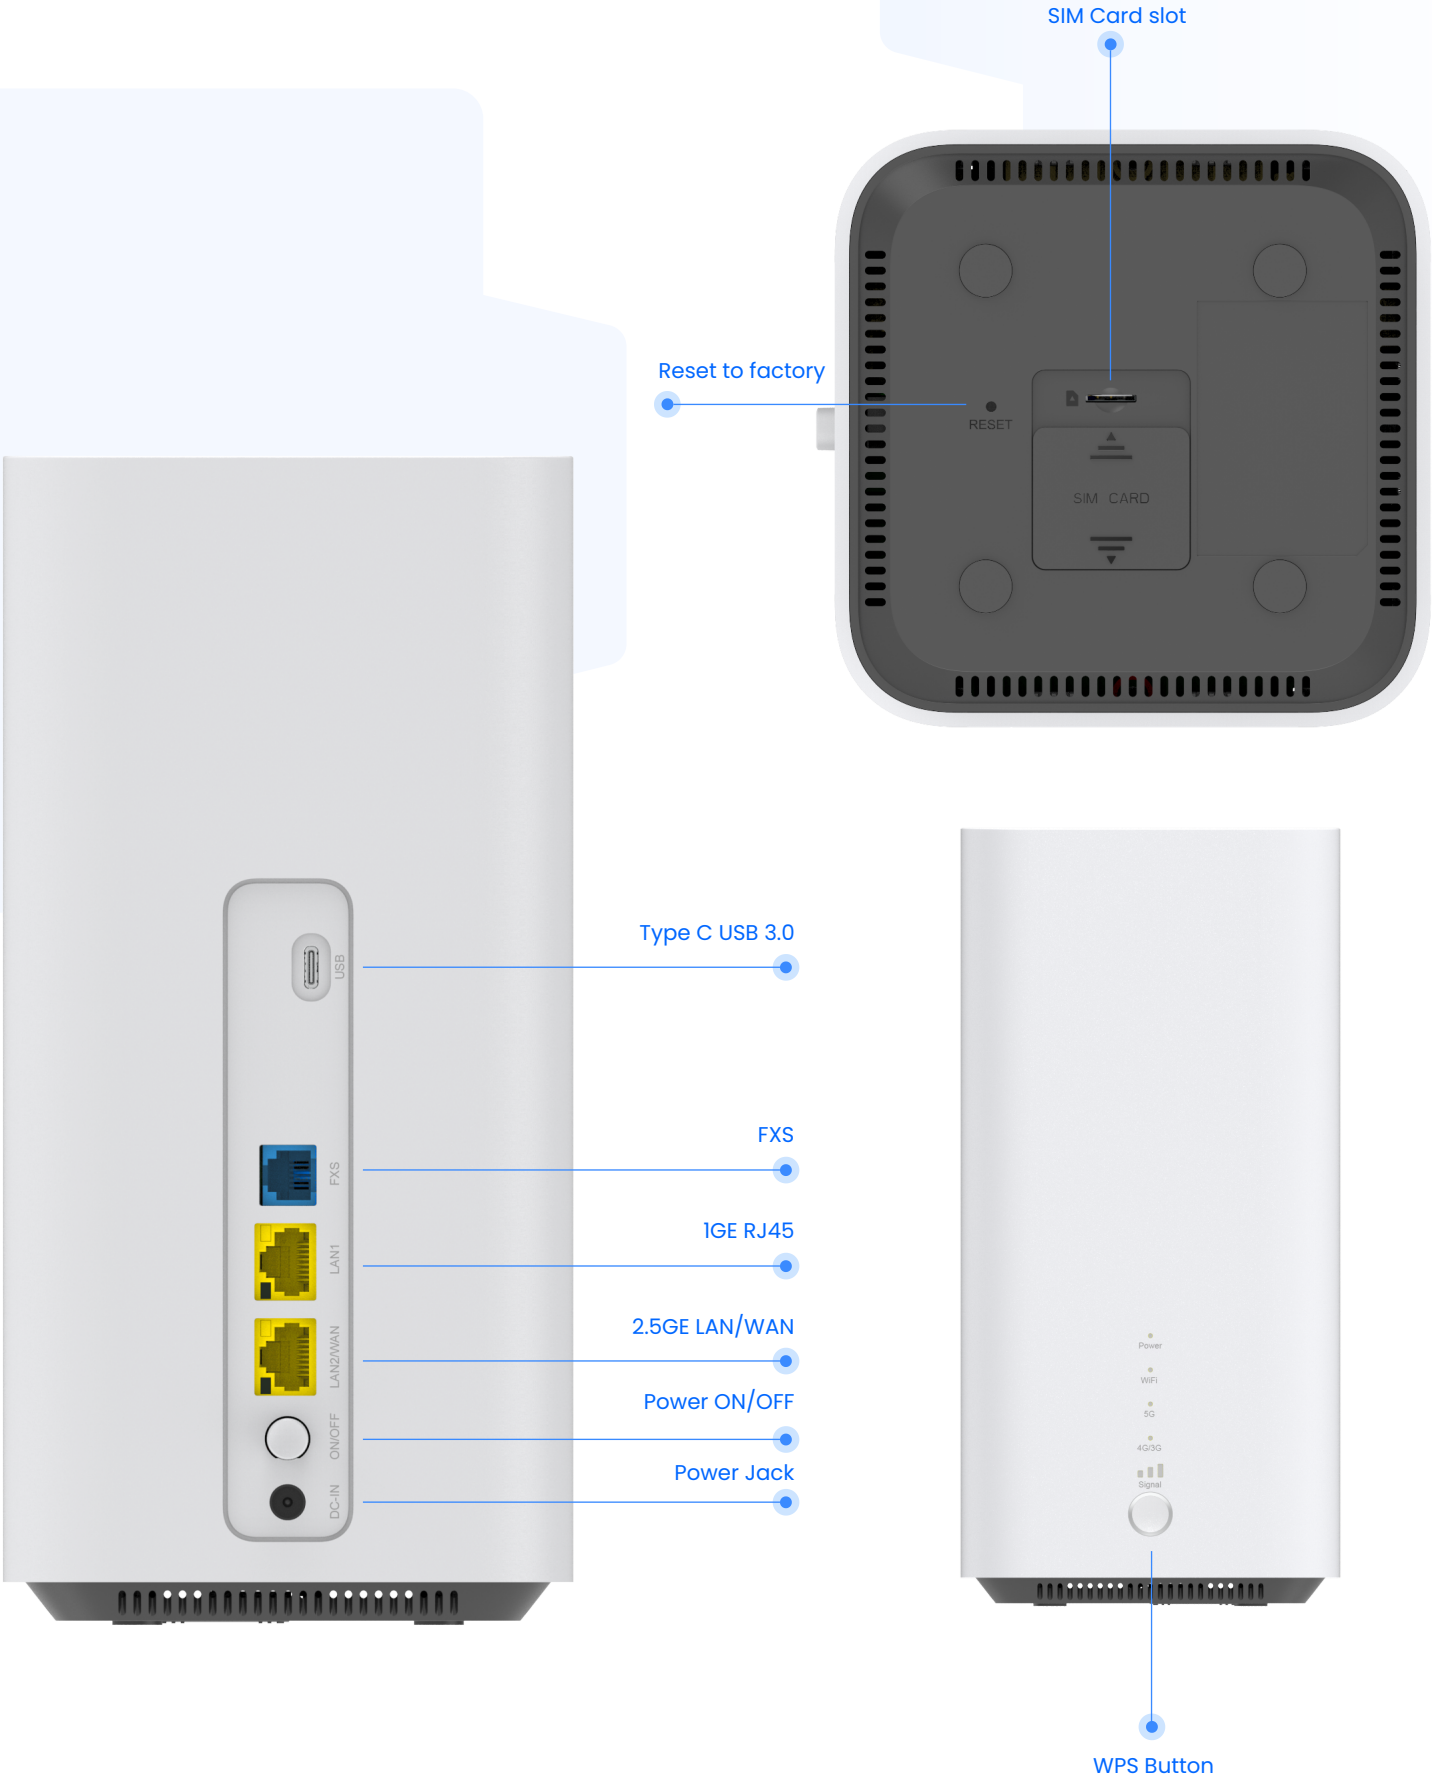
SIM Card slot
Reset to factory
RESET
SIM CARD
Type C USB 3.0
USB
FXS
1GE RJ45
LAN1
2.5GE LAN/WAN
LAN2/WAN
Power ON/OFF
ON/OFF
Power Jack
DC-IN
Power
WiFi
5G
4G/3G
Signal
WPS Button