


LES VIS TÔLE

Tête Cylindrique Large Fendue

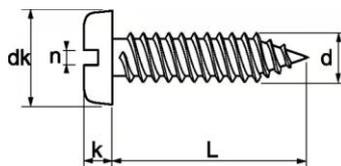


DIN 7971
Nuances : A2 / A4

D	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk (min)	3.9	5.3	6.54	7.14	7.84	9.14	10.37	12.07
K	1.35	1.75	2.1	2.25	2.45	2.8	3.2	3.65
N	0.6	0.8	1	1	1.2	1.2	1.6	1.6

d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge		
2.2	6.5	200	3.2	38	200	4.2	32	200	4.8	80	200	6.3	32	200		
2.9	6.5	200	3.9	6.5	200	4.2	38		5.5	13	200		6.3		38	100
	9.5			45		16										
	13			50		19										
	16			9.5		22										
	19			13		25										
22	16	19	22	25	19	22	25	19	22	25	19	22	25			
25	19	22	25	19	22	25	19	22	25	19	22	25	19	22	25	
3.5	6.5	200	4.2	9.5	200	4.8	25	200	6.3	13	200	6.3	22	200		
	9.5			32			13									
	13			38			16									
	16			45			19									
	19			50			22									
	22			55			25									
	25			60			25									
32	70	25														

Tête Fraisée Fendue

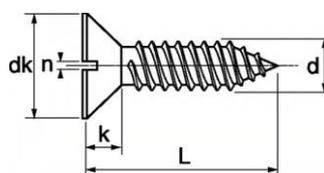


DIN 7972
Nuances : A2 / A4

D	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk (min)	4.3	5.5	6.8	7.5	8.1	9.5	10.8	12.4
K	1.3	1.7	2.1	2.3	2.5	3	3.4	3.8
N	0.6	0.8	1	1	1.2	1.2	1.6	1.6

d	L	Btge																				
2.2	6.5	200	3.5	22	200	4.2	13	200	4.8	25	200	6.3	38	200								
	9.5			25			16			45												
2.9	6.5	200		3.9			32			200			4.8		19	200	5.5	38	200	6.3	50	100
	9.5						38								22			13				
	13						9.5								25			16				
	16		13		32	19																
	19		16		38	22																
22	19	45	25	19	22	25	19	22	25	19	22	25	19	22	25							
25	19	50	22	19	22	25	19	22	25	19	22	25	19	22	25							
3.5	6.5	200	4.2	25	200	4.8	9.5	200	5.5	16	200	6.3	38	100								
	9.5			32			13			45												
	13			38			16			50												
	16			50			19			55												
	19			55			22			60												

Tête Fraisée Bombée Fendue

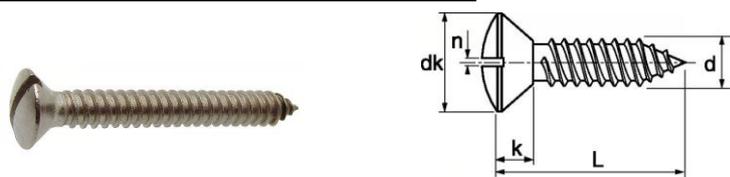


DIN 7973
Nuance : A2

d	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk (max)	5.5	6.8	7.5	8.1	9.5	10.8	12.4
n	0.8	1	1	1.2	1.2	1.6	1.6
k	1.7	2.1	2.3	2.5	3	3.4	3.8

d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge
2.9	6.5	200	3.5	25	200	4.2	13	200	4.8	22	200	5.5	38	200
	9.5			32			16			25			45	
	13			38			19			32			50	
	16			9.5			22			38			13	
	19			13			25			45			16	
3.5	22	200	3.9	16	200	4.8	32	200	5.5	50	200	6.3	19	200
	25			19			38			60			25	
	6.5			22			45			70			32	
	9.5			25			50			13			38	
	13			32			9.5			16			45	
3.5	16	200	4.2	9.5	200	4.8	13	200	5.5	19	200	6.3	50	200
	19			13			16			25				
	22			16			19			32				
				19			25			32				

Tête Cylindrique Large Pozidrive

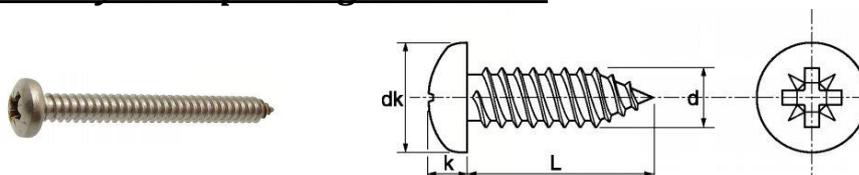


DIN 7981
Nuances : A2 / A4

d	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk	4.2	5.6	6.9	7.5	8.2	9.5	10.8	12.5
k	1.8	2.2	2.6	2.8	3.05	3.55	3.95	4.55
pz	1	1	2	2	2	2	3	3

d	L	Btge	d	L	Btge									
2.2	6.5	200	3.5	19	200	4.2	13	200	4.8	38	200	5.5	50	200
	9.5			22			16			45			60	
	13			25			19			50			70	
	16			32			22			60			80	
	19			38			25			70			13	
2.9	6.5	200	3.9	6.5	200	4.8	32	200	5.5	80	200	6.3	16	200
	9.5			9.5			38			90			19	
	13			13			45			100			22	
	16			16			50			120			25	
	19			19			60			13			32	
	22			22			9.5			16			38	
	25			25			13			19			45	
32	32	16	22	50										
3.5	6.5	200	4.2	38	200	4.8	19	200	5.5	25	200	6.3	60	100
	9.5			45			22			70			80	
	13			50			25			80			90	
	16			9.5			32			90				
				13			38							

Tête Cylindrique Large Torx (Six Lobes)

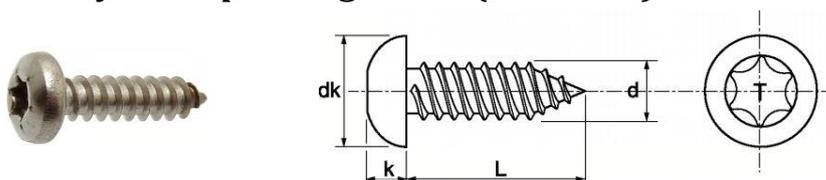


DIN 7981
Nuance : A2

d	3.5	3.9	4.2	4.8	5.5
dk (max)	6.9	7.5	8.2	9.5	10.8
k (max)	2.6	2.8	3.05	3.55	3.95
T	10	15	20	25	25

d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge
3.5	9.5	200	3.5	19	200	4.2	19	200	4.8	16	200	4.8	70	200
	13			22			25			19			80	
	16			25			32			25		16	5.5	200
	19			32			38			32		19		
	25			38			50			38		25		
3.9	9.5	200	4.2	9.5	200	4.8	60	45	32					
	13			13			50	38						
	16			16			13	60	50					

Tête Fraisée Pozidrive

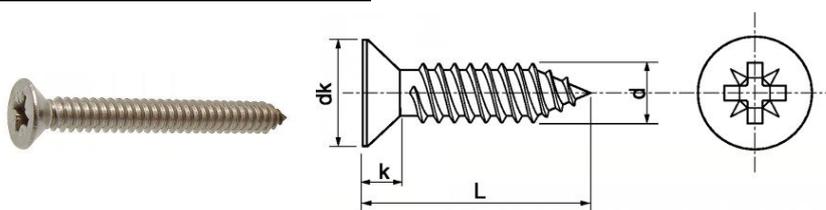


DIN 7982
Nuances : A2 / A4

D	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk (max)	4.3	5.5	6.8	7.5	8.1	9.5	10.8	12.4
K	1.3	1.7	2.1	2.3	2.5	3	3.4	3.8
Pz	1	1	2	2	2	2	3	3

d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge		
2.2	6.5	200	3.5	16	200	3.9	50	200	4.8	22	200	5.5	50	200		
	9.5			19			9.5			25			60			
	13			22			13			32		70	6.3	200		
	16			25			16			38		80				
	19			32			19			45		13				
2.9	6.5	200	3.9	6.5	200	4.2	25	200	5.5	13	200	6.3			16	100
	9.5			9.5			22			19						
	13			13			32			25			25			
	16			16			38			32			32			
	19			19			45			38			38			
	22			22			50			45			45			
	25			25			60			50			50			
32	32	9.5	60	60												
3.5	6.5	200	4.8	13	200	5.5	13	200	6.3	16	200	6.3	45	100		
	9.5			16			19			50						
	13			19			25			60						
				32			32			70						

Tête Fraisée Torx (Six Lobes)

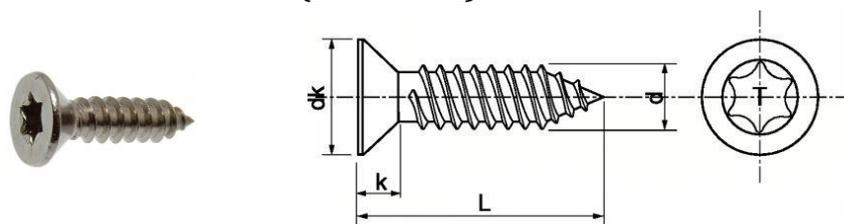


DIN 7982
Nuance : A2

d	3.9	4.8
dk	7.5	9.5
k	2.3	3
T	15	25

d	L	Btge	d	L	Btge	d	L	Btge	d	L	Btge
3.9	9.5	200	3.9	25	200	4.8	16	200	4.8	45	200
	13			32			19			50	
	16			38			25			60	
	19		9.5	32	70						
	22		13	38	80						

Tête Fraisée Bombée Pozidrive

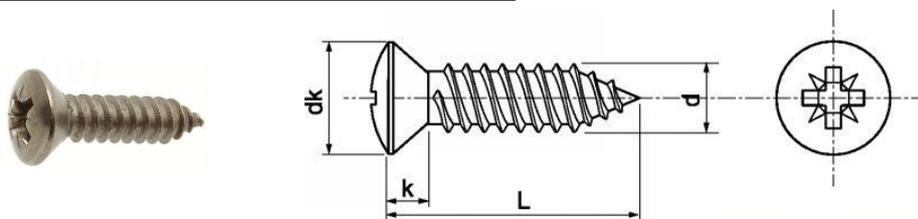

DIN 7983
Nuance : A2

d	2.9	3.5	3.9	4.2	4.8	5.5	6.3
dk (max)	5.5	6.8	7.5	8.1	9.5	10.8	12.4
k (max)	1.7	2.1	2.3	2.5	3	3.4	3.8
pz	1	1	2	2	2	3	3

d	L	Btge												
2.9	6.5	200	3.5	32	200	4.2	16	200	4.8	25	200	5.5	38	200
	9.5			38			19			45				
	13		9.5	22	50									
	16		13	25	60									
	19		16	32	70									
	22		19	45	80									
	25		22	50	9.5		13			5.5		16	200	6.3
3.5	6.5	200	3.9	25	200	4.8	13	200	25					
	9.5			32			16		32					
	13			38			19		38					
	16		45	4.2	22	200	5.5	22	200		45			
	19		50		25			50						
	22		9.5		25			60						
25	13	22	32											