






Hidden features

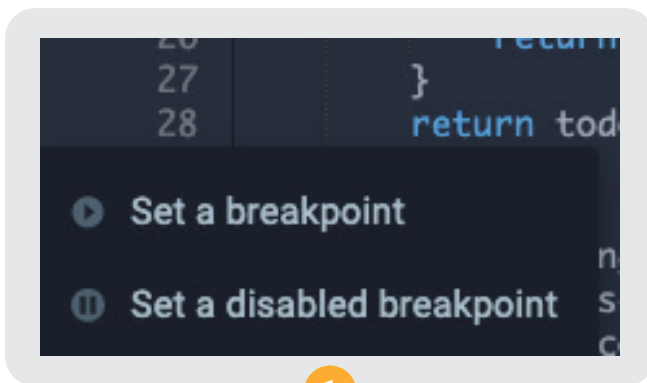

Right-click line gutter to set a disabled breakpoint (to add a condition before enabling it, avoiding rate-limiting)

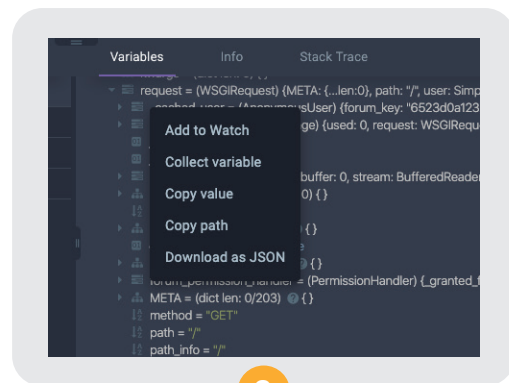

Right-click variables in the messages to automatically collect only this variable, copy values, watch the variables, export as JSON

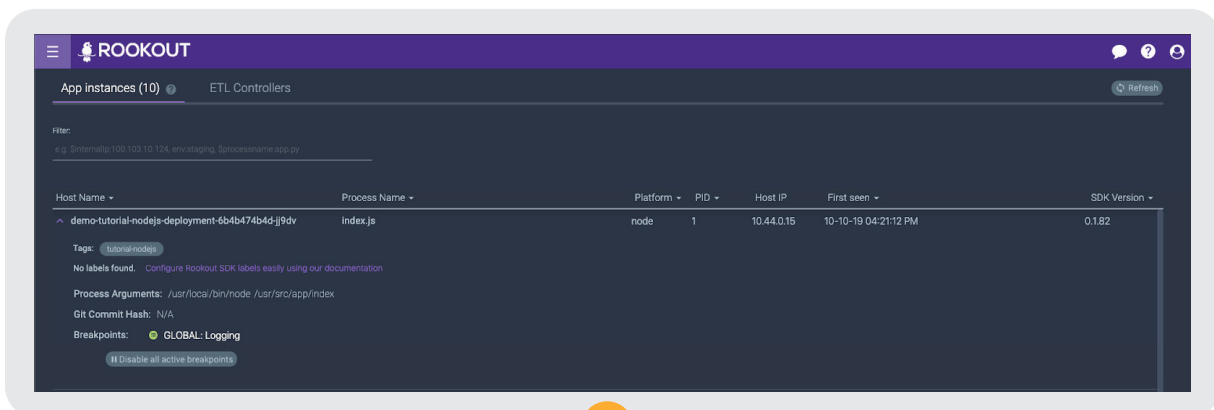

The App Instances tab allows you to see all currently active breakpoints associated with each application and Disable all of them in one click