


A-Gripenl Entrepreneurgrip DGE



MODELL			DGE12	DGE20	DGE25	DGE28	DGE35	DGE42	DGE55
A	Height when open	mm	495	550	620	745	770	845	945
B	Max opening	mm	1000	1250	1400	1435	1820	2000	2250
C	Height when closed	mm	350	425	480	530	610	620	730
D	Min gripping diameter	mm	57	73	90	105	125	125	125
E	Lenght when closed	mm	545	645	730	810	930	1045	1150
F	Gripping area	m ²	0,16	0,2	0,25	0,28	0,35	0,42	0,55
G	Width	mm	264	325	405	420	485	490	600
H	Max width	mm	264	335	410	430	495	500	620
Weight		kg	56	88	145	195	275	290	500
Max load		kg	1500	2000	3500	3500	5000	5000	5000
Max working pressure		Bar	200	250	250	250	250	250	250
Cylinder force		kN	35,3	71,6	115,5	115,5	146,2	180,5	196
Gripping force arms tip		kN	7	12,1	19,3	19,2	25,4	32,8	35
Opening time 70l/min		s	0,16	0,28	0,62	0,5	0,8	1,3	1,5
Closing time 70l/min		s	0,24	0,46	0,83	0,9	1,3	1,8	2
ORDERING CODE			DGE12	DGE20	DGE25	DGE28	DGE35	DGE42	DGE55

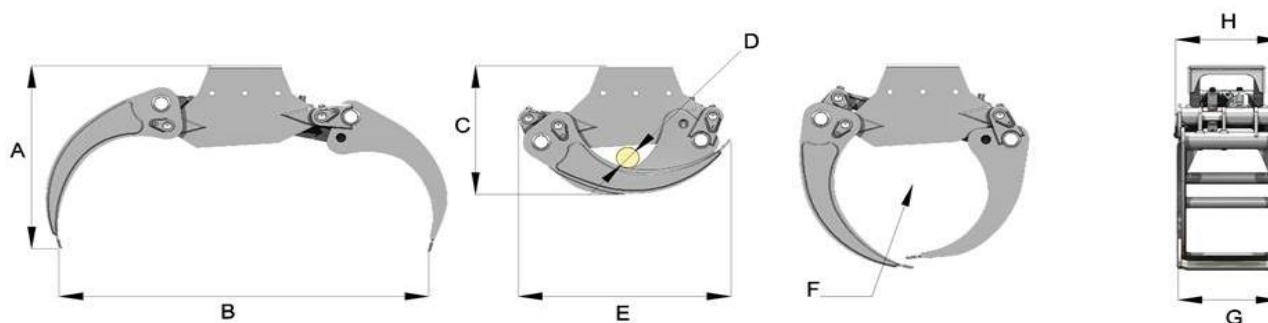

ANKERLØKKEN EQUIPMENT A/S



]

]