



## T 3 Coring Trailer

## T 3 - Coring Trailer



Cores up to 300mm



'T 3' is a self contained hydraulically driven diamond drilling trailer for taking core samples in roads or airport runways. Rugged, compact, manouverable coring trailer.

**2 to 3 hours of normal working** is possible with 6 litre fuel tank & 200 litre water tank

**Drill depths of up to 600mm** as standard with extension kits for deeper drilling

**Honda petrol engine 6 kW** ( Electric Start )

**Hand fed drill** allows for safe coring even through **steel re-inforcement bars**


**Can be towed** by a small or medium size car

**50mm 'Europen' tow hitch** as standard

**Unladen weight 290 kg - Laden weight 495 kg**

**103 dB Maximum** noise level

**Power take-off facility** using the quick release couplings for driving a hydraulic breaker / tamper

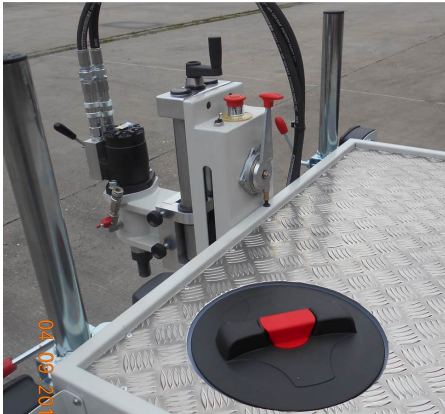

**200 Litre water tank**



**Honda petrol engine**

### Technical specifications

Engine:	Honda 6 kW Air Cooled Electric Start Petrol engine	
Drill Capacity:	Up to 300mm diameter	
Drill Stand:	Detachable drill head & water swivel	
Drill mast:	Standard mast with single stroke up to 600mm	
Water tank:	200 litres capacity	
Water pump	12V DC driven on-board switched pump	
Hydraulic tank:	13 litres capacity	
Hydraulic outputs:	30 litres/min (110 bar)	
Suspension:	Torsion bar to EEC Specification	
Tow Hitch:	50mm to EEC Specification	
Length:	3180 mm	
Width:	1390 mm	
Height:	1250 mm	
Weight	290 kg Un-laden	495 kg Laden
Optional Extras:	Power take-off facility for operation of breakers / tampers	
	Extension bars for deeper drilling	

